



METERS FOR OIL, DIESEL, GREASE AND FLUIDS
2008-10



METERS AND CONTROL VALVES FOR ALL NEEDS

FOR BETTER RESULT WHEN DISPENSING, DOSING OF LUBRICANTS, FLUIDS ETC.

MANUFACTURING AND DEVELOPMENT WITH THE LATEST TECHNOLOGY

 www.eurolube.com

METERS AND CONTROL VALVES FOR OIL AND DIESEL

MANUFACTURING AND DEVELOPMENT WITH THE LATEST TECHNOLOGY

CONTROL VALVES


- Oil control valves with ergonomic and progressive grip for optimum control of dispensing lubricants, diesel and glycols.
- All valves include a 1/2" ball bearing swivel with inlet filter and automatic Non-drip nozzle. 16714 and 16723 with manuel Non-drip nozzle.
- The progressive valve are easy to open even with 10:1 ratio pump.

TECHNICAL DATA 16714,16728-29

INLET	1/2" BSP (F)
MAX FLOW	30 l/min.
MAX. WORKING PRESSURE	100 bar

TECHNICAL DATA 16723

INLET	3/4" BSP (F)
MAX FLOW	48 l/min.
MAX. WORKING PRESSURE	100 bar



PART NO 16723 (with manuel Non-drip nozzle)
PART NO 16723-00 (without outlet tube)



PART NO 16714

PART NO 16728-01

PART NO 16728

PART NO 16729-01

PART NO 16729

Manuell

With automatic Non-drip Nozzle

HOSE END METERS

- Hose end meter with ergonomic and progressive grip for optimum control of dispensing lubricants, diesel and glycols.
- All meters include a protective rubber shroud, ball swivel with inlet filter and automatic Non-drip nozzle. 16712 and 16723 with manuel Non-drip nozzle.
- The digital meters can be easily calibrated by the user for increasing the meter accuracy.

TECHNICAL DATA

	A	B	C
INLET BSP (F)	1/2"	1/2"	3/4"
FLOW RANGE LITER/MIN.	1-15	1-20	1-25
MAX. PRESSURE BAR	70	70	100
BURST PRESSURE BAR	140	140	180
ACCURACY	±0.5%	±1%	±0.5%
MAX./MIN. VISCOSITY MPA/S	5/5000	5/5000	5/5000
POWER SUPPLY AAA ALKALINE BATTERIES	Yes	No	Yes



Digital Meter
PART NO 16726-01



Digital Meter
PART NO 16727-01



Digital Meter
PART NO 16712



Mechanical Meter
PART NO 16718



H.V. Meter
PART NO 16713

Auto

Manuell

IN-LINE METERS FOR OIL AND DIESEL

MANUFACTURING AND DEVELOPMENT WITH THE LATEST TECHNOLOGY

IN-LINE METERS

- Easy menu operated rugged In-Line meters from Eurolube.
- The meters can be installed into the fluid distribution line or end of the line for the control of dispensed volumes.
- Measuring units can be set to: Liter, Quarts, Pints, or Gallons.
- Resettable partial register and non-resettable totalizer.

TECHNICAL DATA	A	B	C	D
METER MECHANISM	Oval gears	Oval gears	Oval gears	Oval gears
FLOW CAPACITY LITER/MIN.	1 - 25	5-50	10-100	1-25
MAX. PRESSURE BAR	70	70	30	70
INLET/OUTLET BSP (F)	1/2"	1/2"	1"	1/2"
PRESSURE DROP BAR	<0,5	<0,5	<0,5	<0,5
ACCURACY	±0.5%	±0.5%	±0.5%	±0.5%
MAX./MIN. FLUID VISCOSITY MPA/S	5/ 5000	5/ 5000	5/ 5000	5/ 5000
TEMPERATUR MIN/MAX	0°/+60°C	0°/+60°C	0°/+60°C	0°/+60°C
POWER SUPPLY AAA ALKALINE BATTERIES	2 of	2 of	2 of	2 of


A
PART NO
1168390



B
PART NO
1168966



C
PART NO
1168967



D
PART NO
1168094



For Oil, Diesel and Antifreeze

For Fluids etc.

GREASE METER AND CONTROL VALVE

- For accurate and measured high pressure grease dispensing.
- Can be used as an in-line meter or as below connected to a control valve.
- Resettable partial register and non-resettable totalizer.
- Works with two standard, easy to replace AAA alkaline batteries.

TECHNICAL DATA	A	B	C
MAX CAPACITY GR/MIN.	1000	1000	-
ACCURACY	± 3%	± 3%	-
MAX. PRESSURE BAR	500	500	500
INLET/OUTLET BSP (F)	1/8"	1/4"-1/8"	1/4"-1/8"
POWER SUPPLY AAA ALKALINE BATTERIES	2of	2of	-

A




PART NO 2168528

B



PART NO 26715

C

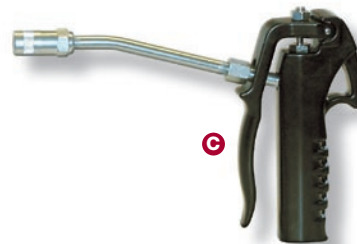

PART NO 26716

MULTI FLUID METER AND CONTROL VALVE

- The handle is made of a fibreglass reinforced thermo plastic with very high chemical resistance.
- Suitable for fluids such as: degreasers, coolant liquids and windscreen wash.
- Seals in polyurethane and Viton, valve in stainless steel. The valve is pressure compensated, easy to open and to control the flow.
- Recommended accessory for all models:
Swivel 3368519, 1/2" x 1/2" (M)

TECHNICAL DATA	36720
METER MECHANISM	Oval gears
FLOW RANGE	1 - 20 l/min.
MAX. WORKING PRESSURE	50 bar
ACCURACY (AFTER CALIBRATION)	±0.5%
INLET	1/2" BSP (F)
MIN-MAX. TEMP	0-50°C

TECHNICAL DATA	36721 / 25
MAX FLOW	20 l/min
MAX. WORKING PRESSURE	50 bar
INLET	1/2" BSP (F)



Digital Meter
PART NO 36720



Dispense gun
PART NO 36721



Spray gun
PART NO 36725

OUTLET AND SWIVELS



PART NO 16706
1/2" swivel for oil.



PART NO 3368519
1/2" swivel for water based fluids.



PART NO 26725
1/4" Z- swivel for grease.



PART NO 26727
1/2" - 27SAE x 1/4" swivel for grease.



PART NO 26726
1/4" straight swivel for grease.



PART NO 26728
1/8" straight swivel for grease.



PART NO 1167754
Rigid 45° c.w. automatic Non-Drip nozzle.



PART NO 1167757
Rigid 135° c.w. automatic Non-Drip nozzle.



PART NO 1167762
Flexible 45° c.w. automatic Non-Drip nozzle.



PART NO 1167763
Flexible 135° c.w. automatic Non-Drip nozzle.



PART NO 1168590
Flexible straight c.w. manual Non-Drip nozzle.



PART NO 1168591
Flexible 90° c.w. manual Non-Drip nozzle.



www.eurolube.com

EUROLUBE EQUIPMENT AB

Box 36, SE-711 21 Lindesberg, Sweden

EMAIL eurolube@eurolube.com PHONE +46 581 836 65 FAX +46 581 409 75