



AUTOVAC 500 WASTE OIL SUCTION UNIT

MANUFACTURE AND DEVELOPMENT USING THE LATEST TECHNOLOGY


 WWW.EUROLUBE.COM

AUTOVAC 500 WASTE OIL SUCTION UNIT

Autovac is an eco-friendly waste oil evacuation method. It employs a fixed setup with a hose reel and probe or quick coupler to extract waste oil directly from the engine into a storage tank. It eliminates direct contact with waste oil and the need for mobile units. The system ensures clean and safe suction with its automatic High Vacuum system, preventing spillage. Installation is simple. Caution: Do not use with flammable or corrosive fluids. Key features include automatic drainage of the built-in tank, accommodating up to 7 workstations simultaneously, and a vacuum switch controlling the pump's operation as needed.

TECHNICAL DATA

| | |
|----------------------|----------------------|
| Part No | 317-54 |
| Capacity | 750 W |
| Maximum air pressure | 0,6 (6,0) MPa (bar) |
| Voltage | 380 V AC |
| Vacuum level | 99 % |
| Tank volume | 500 l |
| Noise level | 62 dB |
| Packaging LxWxH | 1,37 x 1,280 x 2,2 m |
| Weight (Gross) | 216 kg |
| H.S. Code | 84141089 |

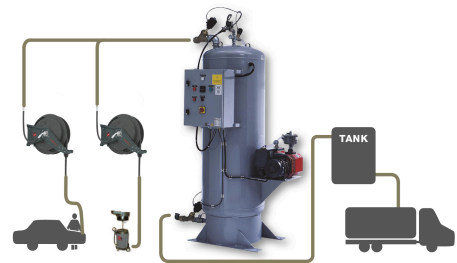

EUROLUBE EQUIPMENT

by Alentec & Orion AB, Grustagsvägen 4, SE-138 40 Älta, Sweden

EMAIL eurolube@alentec.se

PHONE +46 (0)8-747 67 10

FAX +46 (0)8-715 20 74

 www.eurolube.com