



EUROLUBE
LUBRICATION EQUIPMENT

**FLUID MANAGEMENT SYSTEMS: NEX-U® + LUBE-Master • OIL EQUIPMENT
GREASE EQUIPMENT • WASTE OIL EQUIPMENT • MULTI-FLUID EQUIPMENT
ADBLUE® EQUIPMENT • DIESEL EQUIPMENT • HOSE REELS • DRUM HANDLING
AIR TREATMENT • EXHAUST AND FUME EXTRACTION**

CATALOGUE 020

 www.eurolube.com

EUROLUBE EQUIPMENT
by Alentec & Orion AB
Grustagsvägen 4, 138 40 Älta, Sweden

EMAIL eurolube@alentec.se
PHONE +46 8-747 67 10

 www.eurolube.com

WELCOME TO EUROLUBE EQUIPMENT

Eurolube is a Swedish brand specializing in the distribution and support of environmentally-friendly products and tailor-made complete and professional solutions for the handling of lubricants and fluids. We provide quality products to partners in more than 40 countries.

Eurolube's greatest strength is our ability to quickly deliver tailor-made solutions. That, simply, is how we contribute to our partners' efficiency and their profitability.

Our vision: Eurolube is dedicated to quality solutions and support for the lubricant and fluid handling sector. We do this by developing, manufacturing and supplying products that pump, measure and dispense lubricants and fluids, and by delivering these solutions to our partners in the most economical and cost-effective manner.

Operation

Eurolube delivers high quality turnkey solutions for professional and environmentally-friendly handling of lubricants and fluids. Our range covers everything from advice to complete customized systems. These include, for example, air-operated pumps and accessories of our own design, and advanced electronic metering and measuring equipment. This means precise control of dosing and flow measurement and, with our NEX-U® fluid management system, easy connection to existing ERP systems. Our aim is to constantly develop our concept of always being able to offer cost effective solutions with cutting edge technology. Eurolube products are used by companies in the automotive workshops, manufacturing, shipping, mining and agriculture sectors.

Commitment and flexibility

We are recognized for our instant support and our comprehensive interpretation of our partners' needs, for fast order acknowledgement and for short lead times. Our expert knowledge of the rules that apply to the installation of equipment, is a strength we pass on to our partners. Reliable lead times, flexibility and total commitment are our trademarks.

The customer is our partner

We always strive for long term business relationships. We therefore feel it is very important for new customers to get to know who we are and how we think just as we always aim to understand our new customers. In plain language, we always invest the time to visit you, to learn about your operation and to establish a person-to person connection. Interested?

Please contact us to find out more about our opportunities for a winning concept.



ISO CERTIFICATION

We are certified according to ISO 9001 and ISO 14001 which is a confirmation that we have an efficient system for management and control over quality and environmental issues.



NEX·U·®	8
NEX·U·® system components	8
LUBE-MASTER	22
LUBE-Master system components	22
Batch dispensing	26
Tank control	27
OIL EQUIPMENT	32
Air operated pumps	32
Electric oil pumps	42
Hose reels for oil	45
Oil meters and guns	51
Hand operated equipment	55
Oil equipment accessories	58
Measures and funnels	62
GREASE EQUIPMENT	66
Air operated grease pumps	66
Grease pump kits	71
Hose reels for grease	75
Equipment for grease	76
Battery operated grease guns	78
Grease control valves and accessories	79
Drum covers and accessories	81
Grease fittings	84
WASTE OIL EQUIPMENT	90
Waste oil pumps	90
Equipment for pits	91
Mobile waste oil drainers with bowl	93
Autovac - central vacuum system	98
Waste oil handling	99
MULTI-FLUID EQUIPMENT	102
Air operated multi-fluid pumps	102
Wind screen fl / degreaser	106
Meters and control valves	108
Hand operated equipment	110
Measures, funnels and accessories	111

ADBLUE® EQUIPMENT	116
Pumps and kits	116
Hose reels for AdBlue®	119
Nozzles and meters	120
Filling tanks	122
DIESEL EQUIPMENT	124
Diesel pumps	124
Diesel meters	125
Diesel nozzle	126
Filling tanks	127
Fuel suction unit for gasoline and E85	128
AIR EQUIPMENT	130
Air treatment	130
Accessories for air	131
HOSE REELS AND ACCESSORIES	134
Hose reels for standard duty	134
Heavy duty hose reels	139
Accessories for hose reels	145
DRUM HANDLING	150
Drum handling	150
EXHAUST AND FUME EXTRACTION	156
Exhaust hose reels	156
Exhaust hoses	160
Single extraction points / pivoting arms	164
Exhaust extraction rail	165
Exhaust nozzles	166
Control equipment	169
Extraction arms	171
Fans and accessories	174

1	INTRODUCTION
2	GENERAL INFORMATION
3	PRODUCTS
4	APPLICATIONS
5	SALES AND DISTRIBUTION
6	CONTACT INFORMATION
7	INDEX
8	APPENDICES
9	NOTES
10	GLOSSARY
11	ABBREVIATIONS
12	REFERENCES
13	FIGURES
14	TABLES
15	FORMS
16	DIAGRAMS
17	PHOTOGRAPHS
18	VIDEO
19	AUDIO
20	SOFTWARE
21	TOOLS
22	EQUIPMENT
23	VEHICLES
24	MACHINERY
25	STRUCTURES
26	ENVIRONMENT
27	CLIMATE
28	WEATHER
29	SOIL
30	WATER
31	AIR
32	LAND
33	SEA
34	SKY
35	SPACE
36	TIME
37	SPACE
38	TIME
39	SPACE
40	TIME
41	SPACE
42	TIME
43	SPACE
44	TIME
45	SPACE
46	TIME
47	SPACE
48	TIME
49	SPACE
50	TIME
51	SPACE
52	TIME
53	SPACE
54	TIME
55	SPACE
56	TIME
57	SPACE
58	TIME
59	SPACE
60	TIME
61	SPACE
62	TIME
63	SPACE
64	TIME
65	SPACE
66	TIME
67	SPACE
68	TIME
69	SPACE
70	TIME
71	SPACE
72	TIME
73	SPACE
74	TIME
75	SPACE
76	TIME
77	SPACE
78	TIME
79	SPACE
80	TIME
81	SPACE
82	TIME
83	SPACE
84	TIME
85	SPACE
86	TIME
87	SPACE
88	TIME
89	SPACE
90	TIME
91	SPACE
92	TIME
93	SPACE
94	TIME
95	SPACE
96	TIME
97	SPACE
98	TIME
99	SPACE
100	TIME

NEX·U·®

NEX·U.® FLUID MANAGEMENT SYSTEM

– *Wireless flexibility + Hard-wired back-end reliability*

WHAT IS NEX·U.®?


NEX·U.® provides you with the control and the information you require to make your operation more profitable. You will be able to account for every drop of lubricant and other service fluid used.

On top of this, you will carry an efficient inventory control, with automatic alerts and fluid reordering when needed, eliminating operations downtime.


For almost any lubricant usage or operation size, with today's high cost for these fluids, NEX·U.® quickly pays for itself. Once it is paid for, savings go right to the operation's bottom line in the form of profit, profit previously lost. NEX·U.® adapts to your way of working.

INSTALLATION EXAMPLES

PASSENGER CAR WORKSHOP

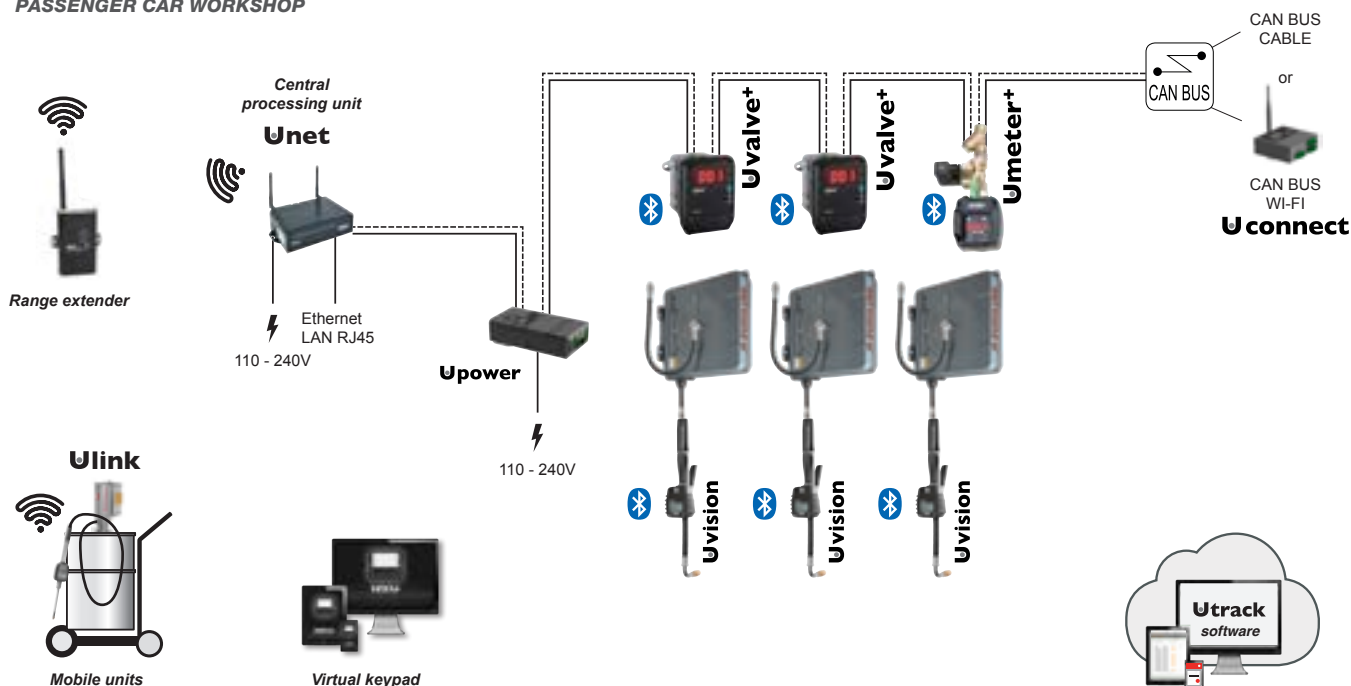

TRUCK WORKSHOP

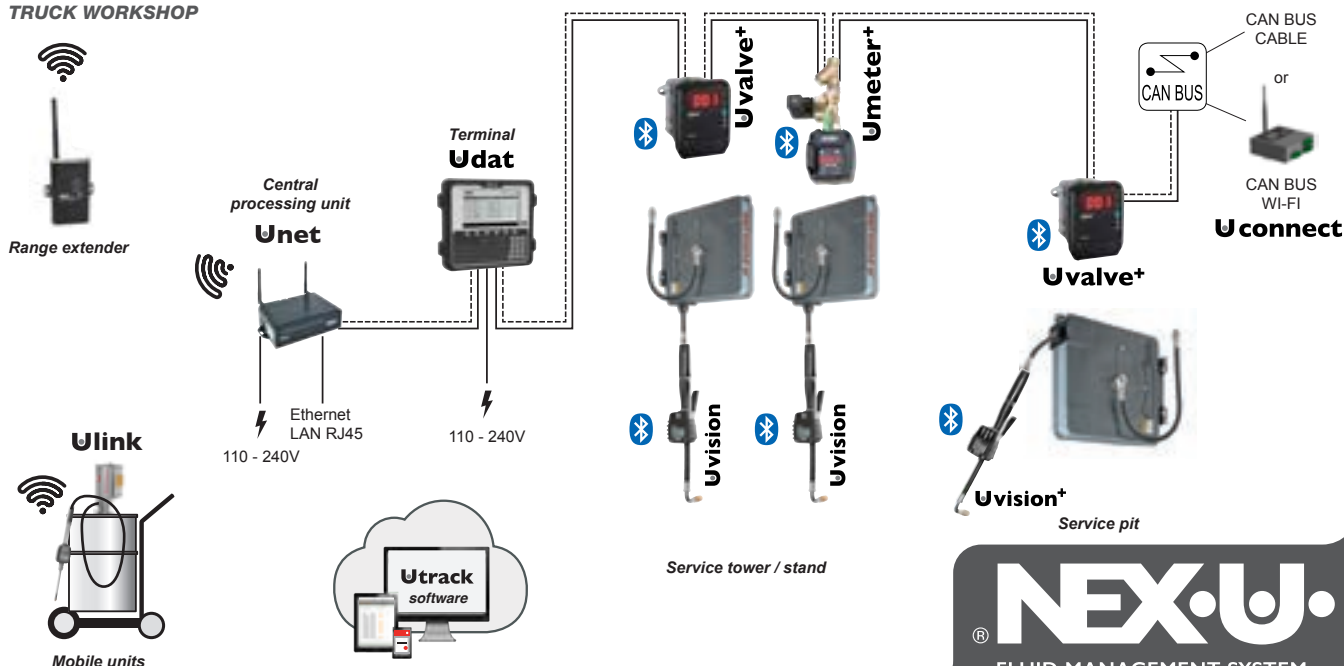

NEX-U® is a hybrid system that brings you all the advantages of wireless flexibility and hard-wired reliability

WIRELESS FLEXIBILITY


- Data can be transmitted wirelessly among the different system components, eliminating long and expensive cable runs.
- Easily adds new components when required as your needs grow.
- System uses existing Wi-Fi® networks, simplifying its installation. No need for special, custom made, network components.

HARD-WIRED RELIABILITY


- A constant and reliable power source is always present to power the solenoid valves that control fluid delivery.
- No uncharged batteries to let you down.
- Hard-wired data transmission to avoid interferences and other obstacles which might interfere with wireless data transmission.

INSTALLATION EXAMPLES

WIRELESS SYSTEM USING U-link

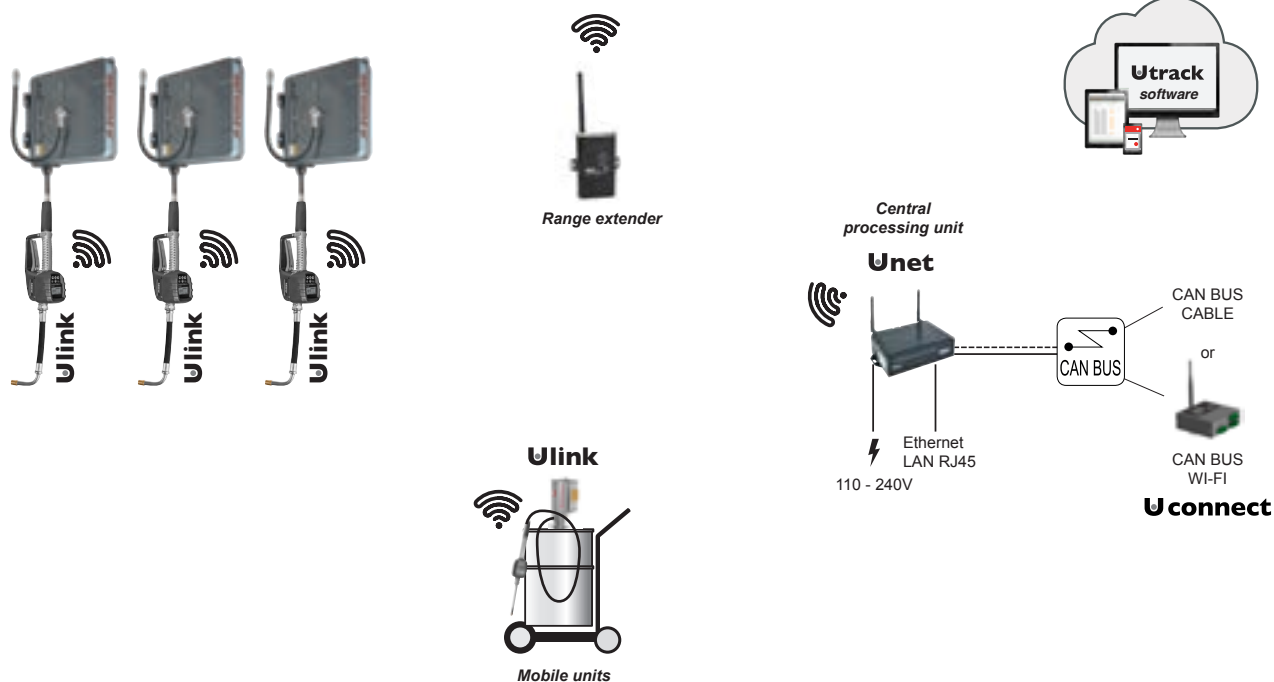

STOCK ROOM

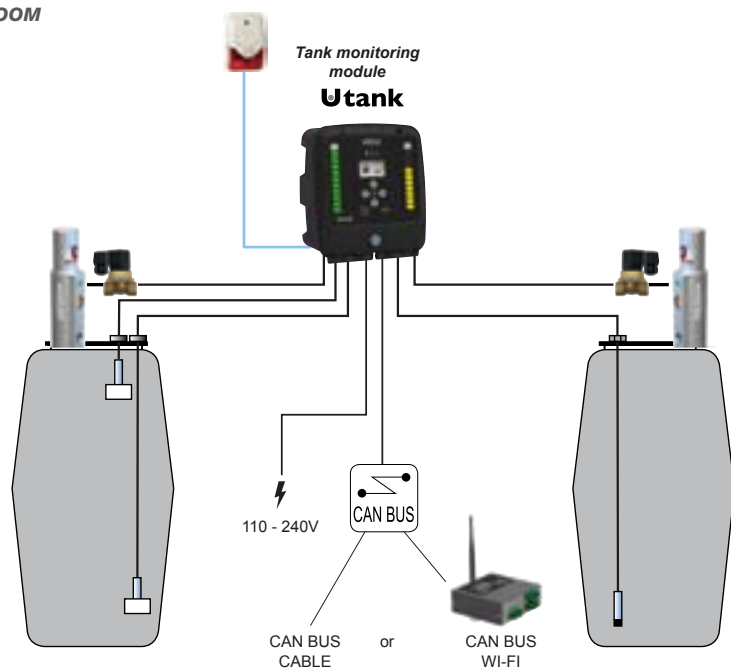

NEX-U®
FLUID MANAGEMENT SYSTEM



TYPE
U-net Central processing unit
PART NO.
53802
DATA
Description: U-net is the key NEX-U.® component. It controls all the system functions and manages the wired and wireless communication among the NEX-U.® components. U-net also includes the U-track software and enables DMS-integration. Communication: Ethernet port (RJ45-port), CAN bus, Wireless (U-link)

TYPE
Virtual keypad
PART NO.
53801
DATA
Description: Virtual Keypad license. Converts any terminal (PC, laptop, tablet or smartphone) into a NEX-U.® access Keypad.

TYPE
U-dat system access keypad
PART NO.
1 53821 2 53820
DATA
Voltage: 230 V AC
1 Description: NEX-U.® access keypad with 7" colour screen and QWERTY keypad. Integrated 320W transformer to open a maximum of 8 solenoid valves. Can be used with external RFID-module, printer and barcode reader. Includes integrated RFID-module. Communication: CAN bus
2 Description: NEX-U.® access keypad with 7" colour screen and QWERTY keypad. Integrated 75W transformer to open a maximum of 2 solenoid valves. Can be used with external RFID-module, printer and barcode reader. Includes integrated RFID-module. Communication: CAN bus

TYPE
NEX-U.® Compact
PART NO.
1 53822 2 53823
DATA
Voltage: 230 V AC
1 Description: Enables full control of transactions and stock level of fluids for smaller workshops. A system based in a special U-dat terminal that is able to control a maximum of 2 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX-U.® Compact does not support connection to U-net Pro.
2 Description: Enables full control of transactions and stock level of fluids for smaller workshops. A system based in a special U-dat terminal that is able to control a maximum of 8 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX-U.® Compact does not support connection to U-net Pro.



TYPE	TYPE	TYPE	TYPE
NEX·U.® Mobile	U-vision	U-vision+	U-count
PART NO.	PART NO.	PART NO.	PART NO.
53824	53830	53831	53836
DATA	DATA	DATA	DATA
Voltage: 230 V AC Description: Enables full control of transactions and stock level of fluids for mobile service trucks. A system based in a special U-dat terminal that is able to control a maximum of 8 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX·U.® Mobile does not support connection to U-net Pro.	Description: Hand-held display module to fit an 1/2" control handle. Includes a backlight display to show delivered volume and operation progress. U-vision can be connected to: U-valve, U-meter+, U-count. Communication: Bluetooth®	Description: Hand-held display module with keypad to fit an 1/2" control handle. Ability to start a dispense directly from the hand-held unit. Includes a backlight display to show delivered volume and operation progress. U-vision can be connected to: U-valve, U-meter+, U-count. Communication: Bluetooth®	Description: U-count is used to control 1 solenoid valve and a U-pulser or external pulse meter. LED display that shows the delivered volume and can be connected to U-vision or U-vision+. Communication: CAN bus, Bluetooth®




TYPE
U-view
PART NO.
53835
DATA
Description: Big remote LED display that shows the delivered volume through U-valve, U-meter, U-meter+. Communication: CAN bus

TYPE
U-tank
PART NO.
53829
DATA
Voltage: 230 V AC Description: Real-time inventory control, controlling two tanks using digital or analogical level gauges. Solenoid valves control output for pump control and to external warning devices. Two independent graphic level bars and a display to show the inventory available in each tank. Communication: CAN bus. Solenoid valve output 24V DC, max 2 per port.

TYPE
U-power
PART NO.
1 53826 2 53827 3 53828
DATA
Voltage: 230 V AC 1 Description: Power supply to a maximum of 2 solenoid valves and other system components. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus 2 Description: Power supply to a maximum of 8 solenoid valves and other system components. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus 3 Description: Power supply to a maximum of 8 solenoid valves and other system components. 3 CAN bus connectors for group division on the communication line. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus

TYPE
U-connect
PART NO.
53881
DATA
Description: U-connect allows wireless communication via Wi-Fi among the different components of the system which are connected via CAN bus.

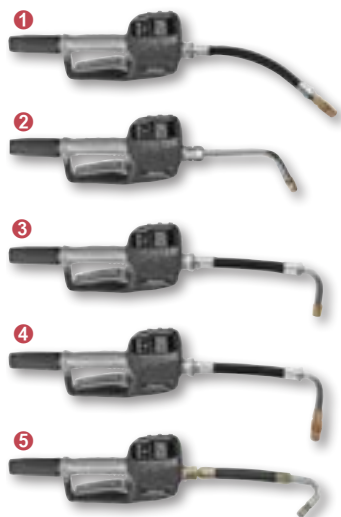

TYPE
U-link wireless hand meter
PART NO.
53803
DATA
Description: Digital hand meter with wireless communication to U-Net. Enables monitoring of transactions via U-track. U-link can be integrated with DMS. Includes integrated solenoid valve and RFID-module. Connection: Wireless

TYPE
U-link with outlet hose
PART NO.
① 10522 ④ 10572 ② 10552 ⑤ 10591 ③ 10571
DATA
Capacity: 1 - 20 l/min free flow Maximum working pressure: 10 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP ① Model: NEX-U.® U-link Wireless digital hand meter with formable hose, manual non-drip nozzle 1/2" (F) BSP Oil/Glycol ② Model: NEX-U.® U-link Wireless digital hand meter with 60° outlet pipe and manual non-drip 1/2" (F) BSP Oil/Glycol ③ Model: NEX-U.® U-link Wireless digital hand meter with 90° hose and automatic non-drip 1/2" (F) BSP Oil/Glycol ④ Model: NEX-U.® U-link Wireless digital hand meter with 90° hose and manual non-drip 1/2" (F) BSP Oil/Glycol ⑤ Model: NEX-U.® U-link Wireless digital hand meter with 135° hose and automatic non-drip 1/2" (F) BSP Oil/Glycol

TYPE
Mobile oil dispenser with U-link wireless hand meter
PART NO.
117-90
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, wireless hose end meter, automatic non-drip nozzle, trolley. Drum NOT included. Maximum air pressure: 1,0 (10) MPa (bar) Pump: B11740

TYPE
NEX-U.® Range extender for U-link
PART NO.
53804
DATA
Description: Used to extend the range between the existing wireless connection between U-link and U-net. Voltage: 230 V AC



TYPE
LUBE-Master Integration
PART NO.
53792
DATA
Description: Software to integrate U-Net and U-link into existing LUBE-Master installations. The integration enables you to initiate a dispense from the regular LUBE-Master terminal and then use the U-link to perform the dispense from, for example, a mobile dispensing unit.

TYPE
U-valve
PART NO.
53850
DATA
Description: Combined pulse meter, solenoid valve, screen filter with the electronics required to control the meter. Big LED display showing the dispense point number and delivered volume. Can be connected to U-vision or U-vision+. Communication: CAN bus, Bluetooth®
Connection: 1/2" (F)-(F) BSP

TYPE
U-meter
PART NO.
1 53860 2 53866 3 53862 4 53864
DATA
1 Model: NEX-U.® U-meter Flow meter aluminium 1/2"
Connection: 1/2" (F) BSP
2 Model: NEX-U.® U-meter Flow meter aluminium 3/4"
Connection: 3/4" (F) BSP
3 Model: NEX-U.® U-meter Flow meter PVC, 1/2"
Connection: 1/2" (F) BSP
4 Model: NEX-U.® U-meter Flow meter Stainless steel 1/2"
Connection: 1/2" (F) BSP

TYPE
U-meter+ with Bluetooth®
PART NO.
1 53861 2 53863 3 53865
DATA
1 Model: NEX-U.® U-meter+ Flow meter aluminium 1/2" with Bluetooth®
Connection: 1/2" (F) BSP
2 Model: NEX-U.® U-meter+ Flow meter PVC, 1/2" with Bluetooth®
Connection: 1/2" (F) BSP
3 Model: NEX-U.® U-meter+ Flow meter Stainless steel 1/2" with Bluetooth®
Connection: 1/2" (F) BSP



TYPE
U-pulser aluminium
PART NO.
1 1168813 2 1168816 3 53868
DATA
Media: Oil/Glycol Accuracy: 0,5 % ± Material: Aluminium 1 Capacity: 1-30 l/min free flow Maximum working pressure: 6,0 (60) MPa (bar) PPU: 328 Connection: 1/2" (F) BSP 2 Capacity: 8-80 l/min free flow Maximum working pressure: 6,0 (60) MPa (bar) PPU: 109 Connection: 3/4" (F) BSP 3 Capacity: 10 - 80 l/min free flow Maximum working pressure: 10 (100) MPa (bar) PPU: 110 Connection: 1" (F) BSP

TYPE
U-pulser stainless steel / PVC
PART NO.
1 1168814 2 1168815
DATA
Accuracy: 0,5 % ± Connection: 1/2" (F) BSP 1 Media: Windscreen fluid/AdBlue®/Fluids Capacity: 1-50 l/min free flow Maximum working pressure: 6 (60) MPa (bar) PPU: 320 Seals: FKM / Viton® Material: Stainless steel 2 Media: Windscreen fluid/AdBlue®/Fluids Capacity: 1-50 l/min free flow Maximum working pressure: 3,0 (30) MPa (bar) PPU: 320 Seals: FKM / Viton® Material: PVC

TYPE
U-meter complete meter unit
PART NO.
1 53870 4 53875 2 53872 5 53877 3 53874
DATA
Voltage: 24 V DC 1 Media: Oil/Glycol Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP 2 Media: Oil/Glycol Maximum pressure: 6 (60) MPa (bar) Connection: 3/4" (M)-(M) BSP 3 Media: Oil/Diesel Maximum pressure: 1 (10) MPa (bar) Connection: 3/4" (M)-(M) BSP 4 Media: AdBlue® Maximum pressure: 1 (10) MPa (bar) Connection: 1/2" (M)-(M) BSP 5 Media: Windscreen fluid Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP

TYPE
U-meter+ complete meter unit with Bluetooth®
PART NO.
1 53871 2 53876 3 53878
DATA
Voltage: 24 V DC 1 Media: Oil/Glycol Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP 2 Media: AdBlue® Maximum pressure: 1 (10) MPa (bar) Connection: 1/2" (M)-(M) BSP 3 Media: Windscreen fluid Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP



TYPE
Solenoid valves for fluids
PART NO.
1 1168574
2 1168964
3 1168980
DATA
Voltage: 24 V DC
1 Media: Various
Maximum pressure: 5 (50) MPa (bar)
Material: Brass
Connection: 1/2" (F)-(F) BSP
2 Media: Various
Maximum pressure: 6 (60) MPa (bar)
Material: Brass
Connection: 1" (F)-(F) BSP
3 Media: Diesel
Maximum pressure: 1 (10) MPa (bar)
Material: Brass
Connection: 3/4" (F) BSP



TYPE
Solenoid valve for waste oil
PART NO.
1168985
DATA
Media: Waste oil
Air connection: 1/4" (F) BSP
Maximum air pressure: max 0,1-0,4 (1-4) MPa (bar)
Maximum working pressure: 1 (10) MPa (bar)
Voltage: 24 V DC
Material: Brass
Connection: 1 1/2" (F) BSP

TYPE
Solenoid valve for AdBlue®
PART NO.
1168578
DATA
Media: AdBlue®
Maximum pressure: 1 (10) MPa (bar)
Material: Stainless steel
Connection: 1/2" (F)-(F) BSP

TYPE
Solenoid valves for air
PART NO.
1 3368514
2 3318791
3 3318795
DATA
1 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC
Connection: 1/4" (F)-(F) BSP
2 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC
Connection: 1/2" (F)-(F) BSP
3 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC/ V AC
Connection: 1/4" (F)-(F) BSP



TYPE	TYPE	TYPE	TYPE
Power supply unit with relay for waste oil pumps	Bar code reader	Mounting bracket for U-valve	Cables
PART NO.	PART NO.	PART NO.	PART NO.
53197	53889	53882	1 53890 4 53890-125 2 53890-25 5 53890-250 3 53890-50
DATA	DATA	DATA	DATA
Model: Power supply unit with relay for waste oil pumps, enclosed 24VDC 5A - 230V, used when there are more than 2 waste oil solenoid valves in the system.	Description: Durable and accurate long range cordless scanner for 1D and 2D barcode reading. Supplied with base unit for communication and charging with net adapter.	Description: Allow fixing U-valve on top of a hose reel stand.	1 Model: NEX·U.® CAN bus cable 2 Model: NEX·U.® CAN bus cable, 25 meter roll 3 Model: NEX·U.® CAN bus cable, 50 meter roll 4 Model: NEX·U.® CAN bus cable, 125 meter drum 5 Model: NEX·U.® CAN bus cable, 250 meter drum

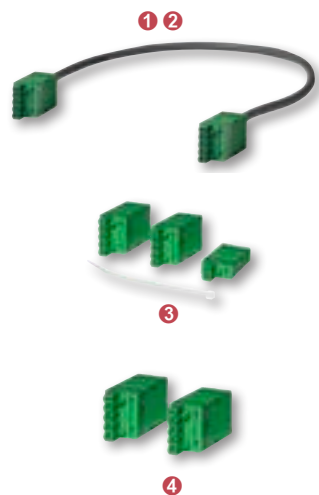

TYPE
Jumper cables
PART NO.
1 53892 3 53891
2 53893 4 53886
DATA
1 Model: NEX-U.® CAN bus jumper cable 0,5m
2 Model: NEX-U.® CAN bus jumper cable 1,0m
3 Model: NEX-U.® U-meter Connectors set
4 Model: NEX-U.® U-Valve Connectors set

TYPE
Signal cable
PART NO.
1 53393-50
2 53393-100
DATA
1 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum.
Cable length: 50 m
2 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum.
Cable length: 100 m

TYPE
Tank alarm
PART NO.
53883
DATA
Model: NEX-U.® Remote flash and acous- tic alarm

TYPE
Level switch, stop level
PART NO.
1 53171
2 53183
3 53287
DATA
1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1 stop level. 1080mm.
Media: Oil
Thread: 3/4" (M) BSP
2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. 1 stop level. Max height: 1080mm.
Media: Windscreen fluid
Thread: 3/4" (M) BSP
3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Cable: 5000 mm. Connection: 2" BSP (M).
Media: Oil
Thread: 2" (M) BSP



NOTES

TYPE
Level switch, stop and alarm levels
PART NO.
1 53191 2 53192 3 53193
DATA
1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1080mm. 2 levels, alarm and stop level. Media: Oil Thread: 3/4" (M) BSP 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 200l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. Max height: 1080mm. 2 levels, alarm and stop level. Media: Windscreen fluid Thread: 3/4" (M) BSP 3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Two levels, alarm & stop. Max height 2000 mm. Media: Oil/Glycol Thread: 1" (M) BSP

TYPE
High level switch
PART NO.
1 53132 2 53154
DATA
Thread: 2" (M) BSP 1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required in use of flammable fluids. Stop level: 150 mm Alarm level: 300 mm 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required when used with flammable fluids. Stop level: 300 mm Alarm level: 450 mm

TYPE
Analogue tank level gauge
PART NO.
1 53417 2 53417-1 3 53437
DATA
1 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For tanks up to 4 m height. 5m cable included. Media: Oil Type: Tank <4 m 2 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For drums or IBC, <1 m. 5m cable included. Media: Oil Type: Tank <1 m 3 Description: 4-20 mA level sensor for tanks up to 3,5 m height. Self calibrated against the surrounding air pressure. To be connected to tank module 53408 / 53829. Media: Windscreen fluid Type: Tank <3,5 m

NOTES

LUBE-Master

LUBE-Master system components	22
--------------------------------------	-----------

Batch dispensing	26
-------------------------	-----------

Tank control	27
---------------------	-----------

LUBE-Master FLUID MANAGEMENT SYSTEM

– *Exceptional performance*

Easily interface with your DMS system

LUBE-Master system provides precise metering and dispensing of oils, coolants, windscreen fluids or any other fluid for automotive and industrial applications.


POWERFUL FEATURES

- Unlimited number of users, job numbers and tanks
- Registers every fluid dispense
- Simple operator interface
- No limit on stored dispenses
- Dispensing can be started from any Keypad, or from the PC.
- Simultaneous dispensing to all points
- Can be remotely controlled over network
- Timeout – closes dispense point if no flow is detected
- Database manager with reports
- Custom reports can be created with MS Excel
- Tanks are monitored in real time
- Tank reports can be sent via e-mail
- Tank monitoring with dry pumping protection
- Pump control, system is pressurized only during dispensing
- Support for bar code, magnet card or dallas key (iButton) readers



SYSTEM OVERVIEW

All the dispense points, keypads, displays, tanks and level sensors can be viewed graphically in the system. You can also customise the overview to show the different products and dispensing points; you can even add your own background and logos.

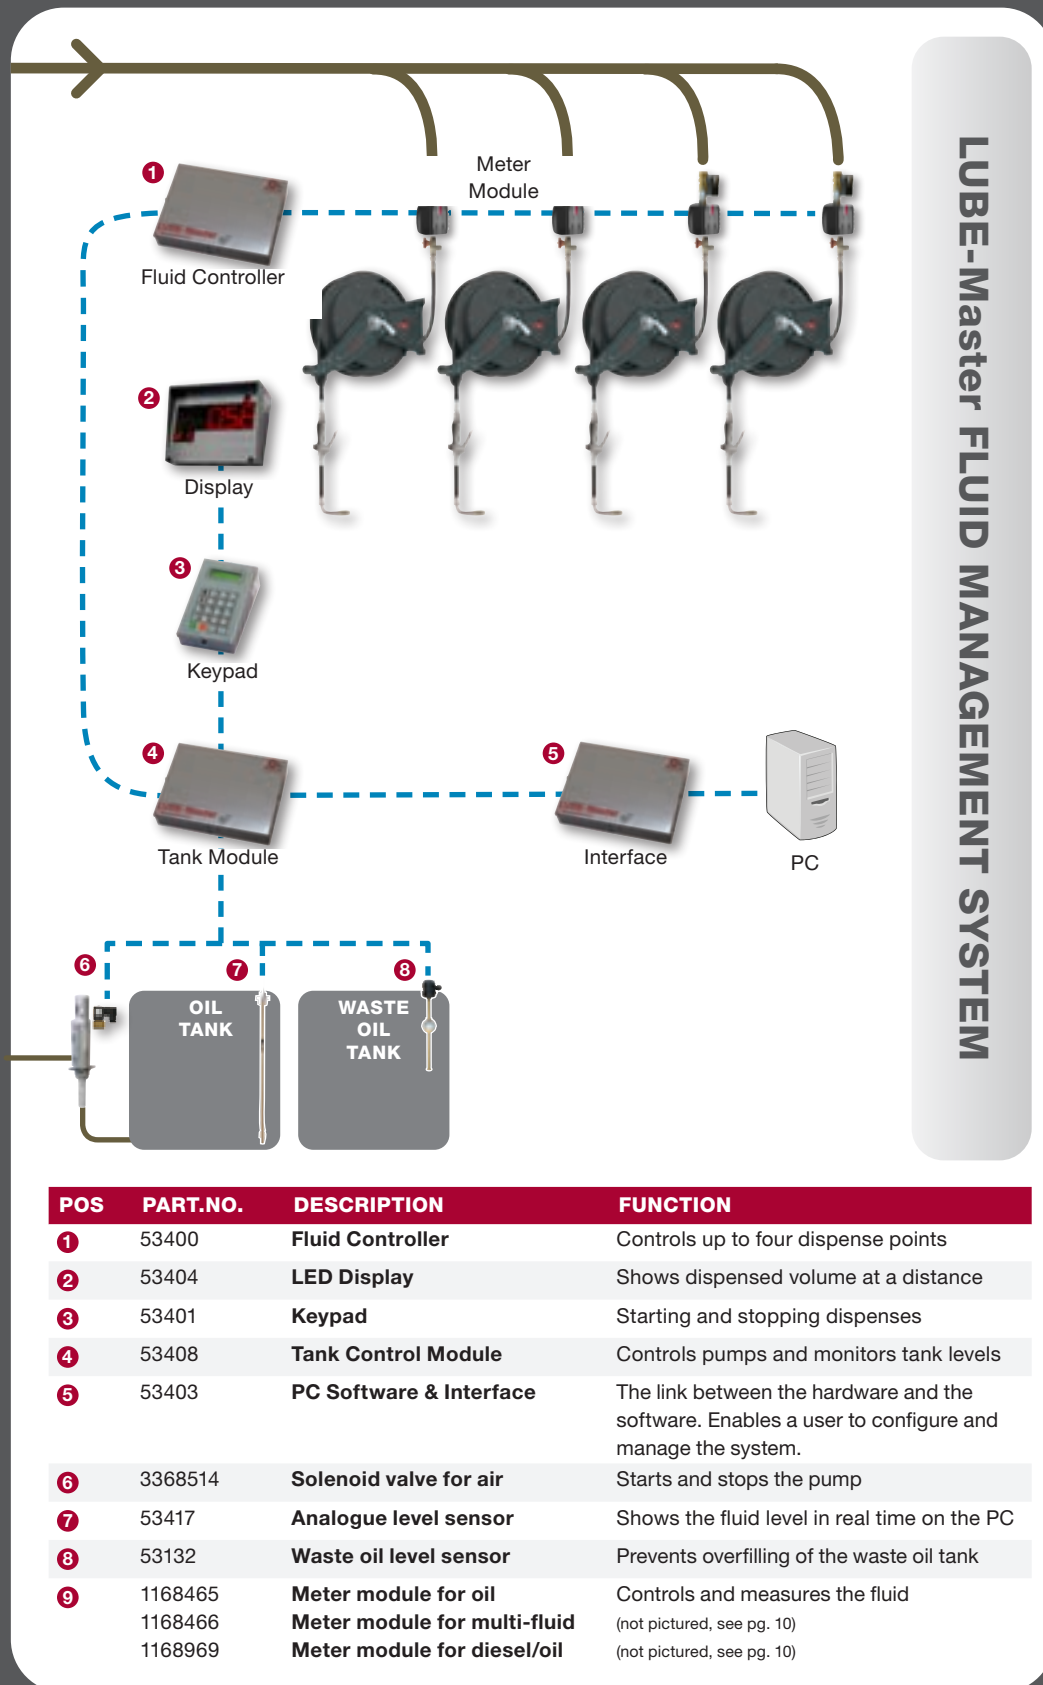

LUBE-Master is ideal for workshop profitability

– Quick return on investment


Tracking your fluid consumption has never been easier. The LUBE-Master system virtually eliminates fluid loss and most systems pay for themselves in the first year.

See below for an example of how fast a system can pay for itself:

Purchased (Liters)	Sold (Liters)	Loss (Liters)	Rate of return #)
30 000	28 500	1 500	4-5 months

Normal loss in a workshop without an oil management system is between 5-15%
(Based on studies and experience)

The above examples is based on 8 dispensing points for oil, the following key items are included in the calculations:

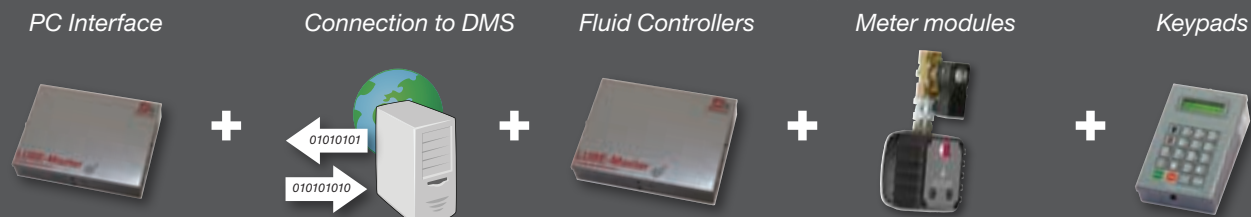

#) Please note, cost for installation on site is not included. We work on the supposition that the oil system is installed.

Save money by connecting LUBE-Master to your dealer / inventory / sales / administration system

By installing LUBE-Master you can ensure that no oil is ever lost or unaccounted for.

THE FACTS

With a manual fluid dispensing system it's inevitable that mistakes will occur such as:

- Oil not booked out
- Incorrect volume booked
- Oil booked to the wrong job number
- Top ups of oil or anti-freeze not booked out at all

All these oversights can add up to a substantial loss of revenue.

THE SOLUTION

By using LUBE-Master interfaced with your Dealer Management System (DMS), these mistakes are eliminated. The 2-way flow of information between LUBE-Master and the DMS means that only an active job or WIP number entered into the system through the remote keypads will allow any fluids to be dispensed. Once dispensed all the fluids used on that job or WIP number are collected by the DMS and automatically posted to the invoice thus eliminating the possibility of human error.

WE TAKE CARE OF IT

We do all the work ourselves. When the LUBE-Master installation is complete, the interface with your DMS works straight away. This means there is:


- No lengthy wait for your DMS supplier to find time to carry out the work.
- Normally no additional cost for the integration.

Currently we have over 60 different links to Dealer Management Systems that are programmed to work perfectly with minimal configuration. Several of the Dealer Management Systems LUBE-Master can interface with are shown in the illustration but there are many others. Please contact us for a comprehensive list.



SET UP A CONNECTION IN 5 MINUTES

If a driver doesn't exist, we have generic drivers for text file export, database export (ODBC), XML file, Excel file etc. These drivers can also be customized to suit your needs in a few minutes, by editing a single configuration file.

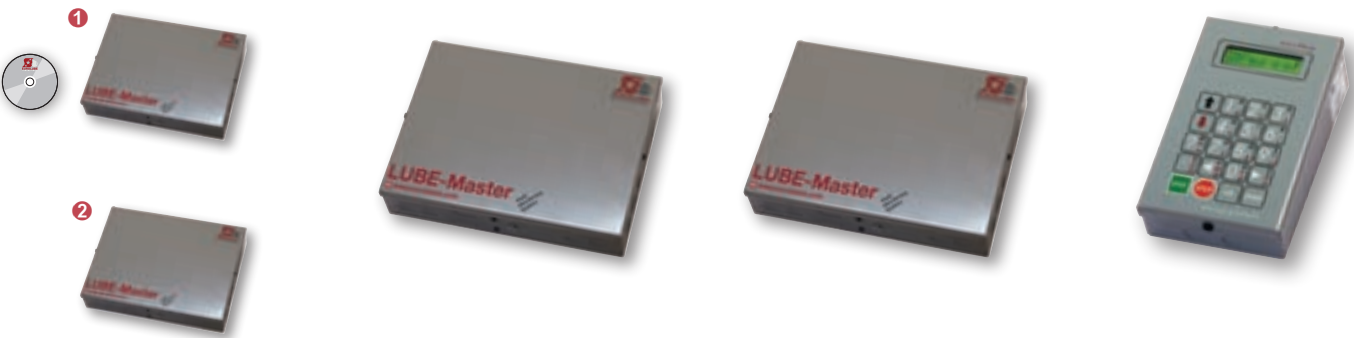

TYPE
PC-Interface / printer module
PART NO.
1 53403
2 53402
DATA
1 Description: LUBE-Master seamlessly integrates with various software packages, offering accurate fluid metering and dispensing capabilities. With support for 11 languages, it caters to diverse user preferences. For detailed information on software integration, please reach out to us. It enables open flow dispensing, batch dispensing, and simultaneous dispensing to multiple points. Additionally, features include flow meter calibration, dispensing from a PC or any keypad, automatic job termination in case of no flow, a database manager with reporting functionality, and a straightforward operator interface.
2 Description: Lube-Master can run without PC, this configuration require the Printer module to have printouts of all transactions. To keep track of date and time, a clock module must be mounted in the Printer module in this configuration. As an extra feature if PC is used, the Printer module can be installed anywhere in a workshop for additional printouts.


TYPE
Fluid controller
PART NO.
53400
DATA
Voltage: 230 V AC
Description: The Fluid Controller controls the amount of fluid ordered from any Key pad or PC in the entire system. One module controls up to 4 outlets. Over-ride bypass facility included.
Every outlet port can be given unique functions as:
Pin code, Volume, Time out, Job number, Group access
PPU Display information, Min/max volume. Signal power 24V DC.

TYPE
Tank module
PART NO.
53408
DATA
Voltage: 230 V AC
Description: Automatic off function to protect air operated pumps, triggered by analogue or discrete level sensors. Controls up to 4 tanks or drums. Signal power 24V DC. The Tank module can only be used in the PC based version.

TYPE
Keypad
PART NO.
53401
DATA
Description: The remote keypads are designed to be placed in strategic locations to allow remote entry of PIN ID, job number, fluid, etc. The LCD display is used to provide clear and concise messages to the operator. There is no limit to the number of keypads in the system. Any outlet can be opened from any keypad. Optional: Barcode or card reader can be connected.



TYPE	TYPE	TYPE	TYPE
Web keypad app	LED display	Tank level display	Communication cable
PART NO.	PART NO.	PART NO.	PART NO.
53432	53404	53429	① 53411-50 ② 53411-100
DATA	DATA	DATA	DATA
Description: Enables increased flexibility, mobility and efficiency by initiating LUBE-Master dispenses from a web capable device such as a smartphone, tablet or computer web browser. Using the web app keypad enables a workshop to omit installing regular keypads and only use the own internal IT components, regardless of platform, to perform fluid dispensing operations using LUBE-Master.	Description: Clearly visible at long distance, useful for large volumes. The display can also be used as a simple "stand-alone" dispense unit. Indication of open dispense point number. Signal power 24V DC.	Description: Display with 40 mm numbers. Displays the volume in the tanks. Adjustable viewing time.	① Description: Connects between modules and provides power to keypads, displays and interface. Two twisted pairs, each pair shielded 4-core. Cable length: 50 m ② Description: Connects between modules and provides power to keypads, displays and interface. Two twisted pairs, each pair shielded 4-core. Cable length: 100 m




TYPE
Signal cable
PART NO.
1 53393-50 2 53393-100
DATA
1 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum. Cable length: 50 m 2 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum. Cable length: 100 m

TYPE
Keypad for external readers
PART NO.
1 53442 2 53443
DATA
1 Description: The keypad has a serial port and a 5V 1W 200mA current supply for external readers, such as the 53445 Tag Reader RFID. The DC cable 200100306 must be supplemented for the Bar Code Reader 53407 and the Card Reader 53409. 2 Description: This product is designed for mounting in existing keypads. It includes a serial port and a 5V 1W 200mA power supply for external readers, such as the 53445 Tag Reader RFID. The DC cable 200100306 must be supplemented with the Barcode Reader 53407 and Magnetic Card Reader 53409.

TYPE
Magnet card reader
PART NO.
53409
DATA
Description: Reads all three tracks. Serial cable and power supply included. A serial port kit is required to connect to the keypad, must be ordered separately, P/N: 53415

TYPE
Tag reader (RFID)
PART NO.
53445
DATA
Description: Compatible with MIF system, used together with a keypad for external reader 53442.

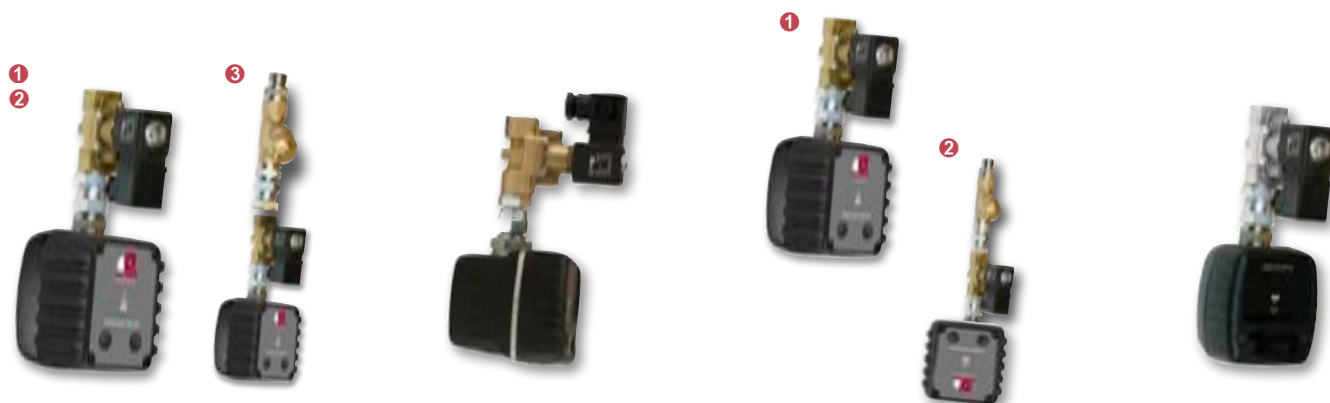

TYPE	TYPE	TYPE	TYPE
Meter module oil	H.V. meter module oil	Meter module windscreen fluid	Meter module AdBlue®
PART NO.	PART NO.	PART NO.	PART NO.
1 1168465 2 1168475	1168969	1 1168466 2 1168476	3187443
DATA	DATA	DATA	DATA
Capacity: 1-20 l/min free flow Maximum pressure: 5 (50) MPa (bar) Voltage: 24 V DC Accuracy: 0,5 % ± Connection: 1/2" (F)-(F) BSP 1 Description: Meter module including meter and solenoid valve. Can be used for oil, diesel, antifreeze. 328PPU. 2 Description: Meter module including meter, solenoid valve and filter. PTB approved. Can be used for oil, diesel, antifreeze. 328PPU.	Capacity: 8-50 l/min free flow Maximum pressure: 5 (50) MPa (bar) Voltage: 24 V DC Accuracy: 0,5 % ± Connection: 1/2" 3/4" (F)-(F) BSP Description: Meter modules includes meter and solenoid valve. The oil meter can also be used for antifreeze. 109 PPU.	Capacity: 1-50 l/min free flow Maximum pressure: 5 (50) MPa (bar) Voltage: 24 V DC Accuracy: 0,5 % ± 1 Description: Meter module including meter and solenoid valve. AISI 316 stainless steel pulse meter. Brass solenoid valve. For windscreen fluid. 320PPU. Connection: 1/2" (F)-(F) BSP 2 Description: Meter module including meter, solenoid valve and strainer. AISI 316 stainless steel pulse meter. Brass solenoid valve. For windscreen fluid. 320PPU. Connection: 1/2" (F)-(F) BSP	Description: LUBE-Master high precision meter modules includes solenoid valve. AISI 316 stainless steel pulse meter. Stainless steel solenoid valve. 328PPU. Capacity: 1-20 l/min free flow Maximum pressure: 1 (10) MPa (bar) Voltage: 24 V DC Accuracy: 0,5 % ± Connection: 1/2" (F)-(F) BSP



TYPE
Integrated meter module oil
PART NO.
1 59830 2 59831
DATA
Capacity: 1-30 l/min free flow
Maximum pressure: 10 (100) MPa (bar)
Voltage: 24 V DC
Accuracy: 0,5 % ±
Connection: 1/2" (F) BSP
1 Description: Includes pulse meter, filter and solenoid valve.
Cable length: -
2 Description: Includes pulse meter, filter and solenoid valve. 5 m cable included (connected to module).
Cable length: 5 m

TYPE
Meter module grease
PART NO.
2168915
DATA
Description: LUBE-Master high precision meter modules includes solenoid valve, pulse meter, solenoid valve. 1100 PPU.
Capacity: 2500 gr/min
Maximum pressure: 30 (300) MPa (bar)
Voltage: 24 V DC
Accuracy: 3 % ±
Connection: 1/4" (M)-(M) BSP

TYPE
Meter module diesel
PART NO.
1168970
DATA
Capacity: 8-50 l/min free flow
Maximum pressure: 1 (10) MPa (bar)
Voltage: 24 V DC
Accuracy: 0,5 % ±
Connection: 3/4" (M) BSP
Description: Meter modules includes meter and solenoid valve. 109 PPU.

TYPE
Dosing controller grease
PART NO.
530-01
DATA
Description: Power supply 230V AC 1-1,5A. 24V adapter incl.
Calibration (PPU) 1-9999.
Number of pre-sets 16 - litre, gal, pints, kg etc.
Range of pre-sets 0,00-999,99.
Solenoid valve 24V DC max 1,5A.
Max free flow 1 kg/min NLGI2.
Max pressure 50 MPa (7250 psi).

BATCH DISPENSING

TANK CONTROL



TYPE
Dosing controller AdBlue®
PART NO.
530-02
DATA
Description: Power supply 230V AC 1-1,5A. 24V adapter. incl. Calibration (PPU) 1-9999. Number of pre-sets 16 - litre, gal, pints, kg etc. Range of pre-sets 0,00 - 999,99. Solenoid valve 24V DC max 1,5A. Max free flow 1-20 l/min. Max pressure 1 (10) MPa (bar).

TYPE
Dosing controller oil
PART NO.
530-03
DATA
Description: Power supply 230V AC 1-1,5A. 24V adapter incl. Calibration (PPU) 1-9999. Number of pre-sets 16 - litre , gal, pints, kg etc. Range of pre-sets 0,00-999,99. Solenoid valve 24V DC max 1,5A. Max free flow 20 l/min. Max pressure 5 MPa (725 psi).

TYPE
LMD Controller
PART NO.
53406
DATA
Description: Power supply 230V AC 1-1,5A. 24V adapter incl. Calibration (PPU) 1-9999. Number of pre-sets 16 - litre, gal, pints, kg etc. Range of pre-sets 0,00-999,99.

TYPE
Control panel tank and drum
PART NO.
53430
DATA
Description: Automatic off function to protect air operated pumps, triggered by analogue or discrete level sensors. Controls up to 4 tanks or drums. Signal power 24V DC. Voltage: 230 V AC



TYPE
Dry pumping protection
PART NO.
53195
DATA
Description: For use as a protection against overfilling or dry pumping of waste oil or windscreen fluid. The panel has built-in ATEX classified security barrier and lamp for stop and alarm. Signal power 24V DC.
Voltage: 230 V AC


TYPE
EX Barrier
PART NO.
53187
DATA
Description: To be used in connection with waste oil and windscreen fluids. Note To make an installation EX approved, use a specific cable for this purpose, part no 53164.
Voltage: 230 V AC

TYPE
Solenoid valve relay
PART NO.
53167
DATA
Description: To be used when more than two solenoid valves are used for waste oil. Power supply 24 V DC.

TYPE
Analogue level sensor
PART NO.
1 53417 2 53417-1 3 53437
DATA
1 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For tanks up to 4 m height. 5m cable included.
Media: Oil
Type: Tank <4 m
2 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For drums or IBC, <1 m. 5m cable included.
Media: Oil
Type: Tank <1 m
3 Description: 4-20 mA level sensor for tanks up to 3,5 m height. Self calibrated against the surrounding air pressure. To be connected to tank module 53408 / 53829.
Media: Windscreen fluid
Type: Tank <3,5 m

TANK CONTROL

TANK CONTROL

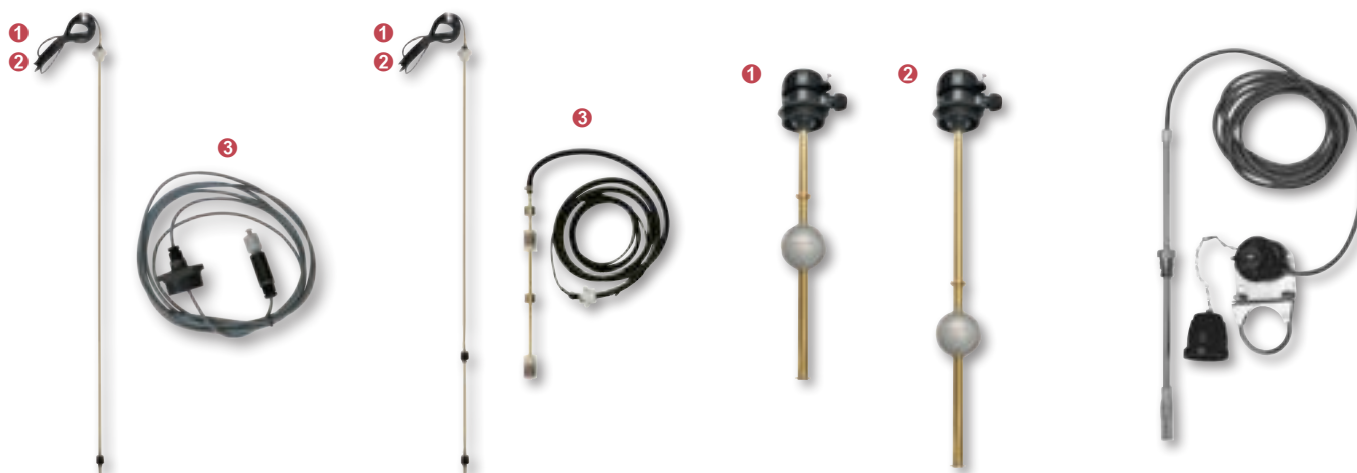

TYPE	TYPE	TYPE	TYPE
Level switch, stop level	Level switch, stop and alarm levels	Overfilling sensor for waste oil	Overfilling protection fresh oil / AdBlue®
PART NO.	PART NO.	PART NO.	PART NO.
1 53171 2 53183 3 53287	1 53191 2 53192 3 53193	1 53132 2 53154	1 53140 2 53141
DATA	DATA	DATA	DATA
1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1 stop level. 1080mm. Media: Oil Thread: 3/4" (M) BSP 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. 1 stop level. Max height: 1080mm. Media: Windscreen fluid Thread: 3/4" (M) BSP 3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Cable: 5000 mm. Connection: 2" BSP (M). Media: Oil Thread: 2" (M) BSP	1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1080mm. 2 levels, alarm and stop level. Media: Oil Thread: 3/4" (M) BSP 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 200l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. Max height: 1080mm. 2 levels, alarm and stop level. Media: Windscreen fluid Thread: 3/4" (M) BSP 3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Two levels, alarm & stop. Max height 2000 mm. Media: Oil/Glycol Thread: 1" (M) BSP	Thread: 2" (M) BSP 1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required in use of flammable fluids. Stop level: 150 mm Alarm level: 300 mm 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required when used with flammable fluids. Stop level: 300 mm Alarm level: 450 mm	Cable length: 15 m Length: 200-500 mm 1 Description: Connects to the tanker with a plug. Adjustable 200-500mm. Cable 15m. Media: Oil 2 Description: Connects to the tanker with a plug. Stainless steel. Adjustable 200-500mm. Cable 15m. Media: AdBlue®



TYPE
Grease pressure switch
PART NO.
53142
DATA
Description: Grease pressure sensor kit, de- tects air entering the pipe system and gives a signal. Connection kit included.
Maximum pressure: 0-60 (0-600) MPa (bar)
Connection: 3/8" (M)-(M) BSP

TYPE
Solenoid valves for oil
PART NO.
1 1168574 2 1168964 3 1168980
DATA
Voltage: 24 V DC
Material: Brass
1 Media: Various
Maximum pressure: 5 (50) MPa (bar)
Connection: 1/2" (F)-(F) BSP
2 Media: Various
Maximum pressure: 6 (60) MPa (bar)
Connection: 1" (F)-(F) BSP
3 Media: Diesel
Maximum pressure: 1 (10) MPa (bar)
Connection: 3/4" (F) BSP

TYPE
Solenoid valve for AdBlue®
PART NO.
1168578
DATA
Media: AdBlue®
Maximum pressure: 1 (10) MPa (bar)
Material: Stainless steel
Connection: 1/2" (F)-(F) BSP

TYPE
Solenoid valves for air
PART NO.
1 3368514 2 3318791 3 3318795
DATA
Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 1/2" (F)-(F) BSP
3 Connection: 1/4" (F)-(F) BSP


Oil equipment

Air operated pumps	32
Electric oil pumps	42
Hose reels for oil	45
Oil meters and guns	51
Hand operated equipment	55
Oil equipment accessories	58
Measures and funnels	62

AIR OPERATED PUMPS

AIR OPERATED PUMPS

C50-Series

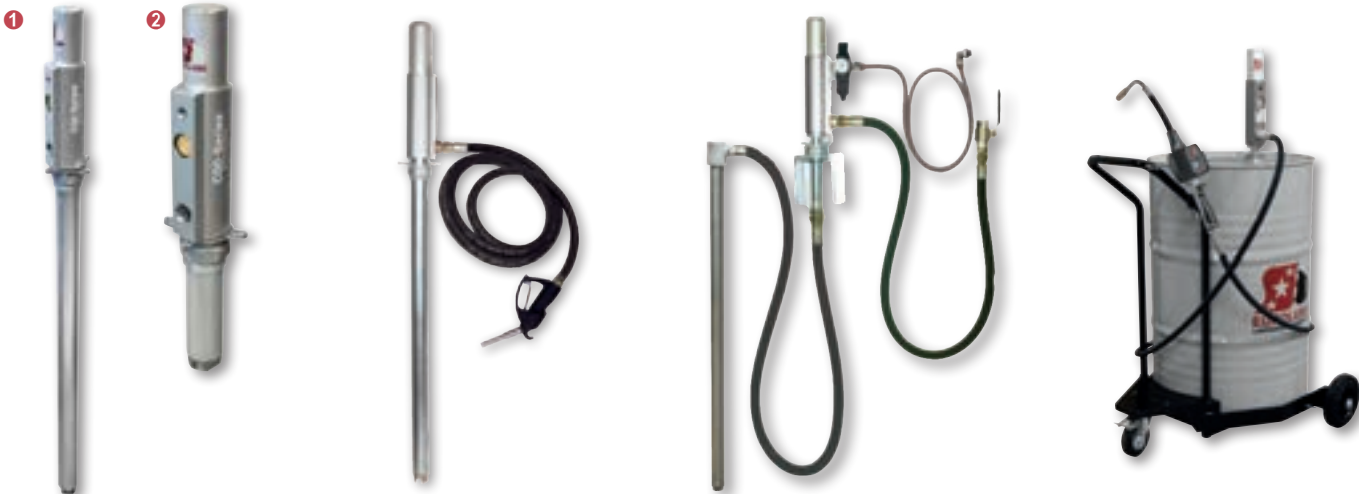

TYPE
1:1 Transfer pumps
PART NO.
1 B11740
2 B11741
DATA
Ratio: 1:1
Capacity: 40 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
1 Pump tube: 52 (917) Ø (length) mm
2 Pump tube: 52 (212) Ø (length) mm

TYPE
1:1 Transfer pump for diesel
PART NO.
117-08
DATA
Description: Complete air operated pump to dispense light oils and diesel. Quiet and double acting operation and easy to fit to drum. Included 2" drum adapter, 1:1 pump B11740, 3m x 3/4" hose and control valve.
Maximum air pressure: 1 (10) MPa (bar)

TYPE
1:1 Wall pump drum & IBC
PART NO.
117-02
DATA
Description: Complete air operated pump to dispense light lubricating oils in short piped systems. Quiet and double acting operation and easy to fit to drum or IBC tanks, seals in NBR/PU. Max air pr.: 1.0 MPa (150 psi).
Includes:
1:1 Pump B11741
Wall bracket
1/4" Filter regulator
1,5 m Air line hose
2 m Hose for oil
3/4" Ball valve
1,08 m suction tube c.w. 2 m suction hose.

TYPE
1:1 Mobile oil dispenser for 208 l drum
PART NO.
137-46
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, automatic non-drip nozzle, trolley. Drum NOT included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740

AIR OPERATED PUMPS

AIR OPERATED PUMPS



TYPE
1:1 Drump pump kit for 208 l drum
PART NO.
117-01
DATA
Description: Complete air operated pump to dispense lubricating oils. Quiet and double acting operation and easy to fit to drum. Includes 2" drum adapter, 1/4" filter regulator, 1,5 m air line hose, 1,5 m hose for oil, 3/4" ball valve.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740
Seals: NBR/PU

TYPE
1:1 Mobile oil dispenser with U-link wireless hand meter
PART NO.
117-90
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, wireless hose end meter, automatic non-drip nozzle, trolley. Drum NOT included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740

TYPE
1:1 Oil dispenser with safety trolley
PART NO.
137-57
DATA
Description: Consists of drum trolley 16860, pump B11740, 3 m hose and hose end meter 10371. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

TYPE
1:1 Transfer pump for drum
PART NO.
① 1050-100 ② 1050-900
DATA
Capacity: 15 l/min free flow
Air connection: 6,35 (1/4") Ø mm (inch)
Maximum air pressure: 0,7 (7,0) MPa (bar)
Pump tube: 400 - 915 mm
① Description: Easy to use air operated pump for transfer of light oils and diesel. Quiet operation and easy to fit to drum, 2" adapter included, Outlet: Ball valve. Pump tube: Telescopic.
② Description: Complete hose kit with ball valve. Fits all model of AF1-Pumps.

AIR OPERATED PUMPS

AIR OPERATED PUMPS



C50-Series



C50-Series



C115-Series



TYPE
3:1 Pump for drum
PART NO.
1 B13760 2 B13762
DATA
1 Ratio: 3:1
Capacity: 22 l/min free flow
For container: 208 l Drum
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Pump tube: 34 (915) Ø (length) mm
Seals: NBR/PU
2 Ratio: 3:1
Capacity: 22 l/min free flow
For container: 60 l Drum
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Pump tube: 34 (707) Ø (length) mm
Seals: NBR/PU

TYPE
3:1 Pump stub
PART NO.
B13761
DATA
Ratio: 3:1
Capacity: 22 l/min free flow
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 3/4" (F) BSP
Outlet: 3/4" (F) BSPT
Pump tube: 34 (209) Ø (length) mm
Seals: NBR/PU

TYPE
3:1 H.V. Pump stub
PART NO.
13770
DATA
Ratio: 3:1
Capacity: 120 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 90 (200) Ø (length) mm
Seals: NBR/PU

TYPE
3:1 Drum pump with oil gun
PART NO.
137-11
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m

AIR OPERATED PUMPS

AIR OPERATED PUMPS



TYPE
3:1 Drum pump with digital meter
PART NO.
1 137-12 2 137-12EF
DATA
1 Model: 3:1 Pump kit 208 l drum, complete with digital hose end meter Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 Hose length: 3 m Meter: 10372 2 Model: 3:1 Pump kit 208 l drum with approvable meter Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 Hose length: 3 m Meter: 16717

TYPE
3:1 Drum pump with mechanical meter
PART NO.
137-19
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included. Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 Hose length: 3 m Meter: 16719

TYPE
3:1 Drum pump with mechanical pre-set meter
PART NO.
137-27
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included. Dimension: 12,5 (1/2") mm (inch) Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 Hose length: 3 m Meter: 16716

TYPE
3:1 Drum pump for 208 l drum
PART NO.
137-01
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets. Quiet and double acting operation and easy to fit to drum. Includes 2" drum adapter, 1/4" filter regulator, 1,5 m air line hose, 2 m hose for oil, 3/4" ball valve. Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 Seals: NBR/PU



TYPE
3:1 Wall pump drum & IBC
PART NO.
137-02
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets. Quiet and double acting operation and easy to fit to drum or IBC tank. Includes: wall bracket, 1/4" filter regulator, 1,5 m air line hose, 2 m hose for oil, 3/4 ball valve, 1 m suction tube c.w. 2 m suction hose.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
Seals: NBR/PU

TYPE
3:1 Wall pump kit for tank
PART NO.
137-03
DATA
Description: Air operated pump designed to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets.
Quiet and double acting operation and easy to fit to drum or tank, 2" drum adapter included, seals in NBR/PU. Max air pr.: 1.0 MPa (150 psi). Includes: wall bracket, 1/4" filter regulator, 1,5 m air line hose, 2 pcs hoses for oil, 2 pcs ball valves.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
Seals: NBR/PU

TYPE
3:1 Drum pump kit with hose reel
PART NO.
1 137-04 2 137-05
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Seals: NBR/PU
1 Description: Complete pump kit to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum. Includes: 2" drum adapter, 1/4" filter regulator, 1,5m air line hose, S10 hose reel, digital meter.
For container: 208 l Drum
Pump: B13760
2 Description: Complete pump kit to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum. Includes: 2" drum adapter, 1/4" filter regulator, 1,5m air line hose, S10 hose reel, digital meter.
For container: 60 l Drum
Pump: B13762

TYPE
3:1 Oil dispenser with safety trolley standard
PART NO.
137-60
DATA
Description: Consists of an oil pump B13760, hose reel 10 m 17852 with hose end meter 10371 and drum trolley 16860. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

AIR OPERATED PUMPS

AIR OPERATED PUMPS



E80-Series



E80-Series



TYPE
3:1 Oil dispenser with HD safety trolley, pneumatic tyres
PART NO.
137-61
DATA
Description: Consists of pump B13760, hose reel (17852) with hose end meter 10371 and trolley 16861. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

TYPE
3:1 Oil dispenser with HD safety trolley, solid tyres
PART NO.
137-62
DATA
Description: Consists of pump B13760, hose reel (17852) with measuring plant 10371 and trolley 16862. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

TYPE
5:1 Pump for drum
PART NO.
15830
DATA
Ratio: 5:1 Air connection: 1/4" (F) BSP Maximum air pressure: 1,0 (10) MPa (bar) Inlet: - Outlet: 3/4" (F) BSP Pump tube: 52 (910) Ø (length) mm

TYPE
5:1 Pump stub
PART NO.
15831
DATA
Ratio: 5:1 Air connection: 1/4" (F) BSP Maximum air pressure: 1,0 (10) MPa (bar) Inlet: 1" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 52 (230) Ø (length) mm

AIR OPERATED PUMPS

AIR OPERATED PUMPS



C115-Series



C150-Series



TYPE
5:1 H.V. Pump
PART NO.
1 15735 2 15736
DATA
Ratio: 5:1
Capacity: 30 l/min free flow
Air connection: 3/8" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Outlet: 1/2" (F) BSP
1 Pump: 208 l Drum
Pump tube: 925 mm
Length: 1194 mm
2 Pump: Stub
Pump tube: 52 (200) Ø (length) mm
Length: 469 mm

TYPE
6:1 H.V. Pump stub
PART NO.
15755
DATA
Ratio: 6:1
Capacity: 100 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 70 (200) Ø (length) mm

TYPE
6:1 H.V. Pump stub
PART NO.
15756
DATA
Ratio: 6:1
Capacity: 100 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 90 (200) Ø (length) mm

TYPE
5:1 Wall pump kit for tank
PART NO.
157-03
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: 15831
Seals: NBR/PU

AIR OPERATED PUMPS

AIR OPERATED PUMPS



C150-Series



C115-Series



C115-Series



TYPE
5:1 Wall pump for drum & IBC
PART NO.
157-04
DATA
Maximum air pressure: 1,0 (10) MPa (bar) Pump: 15831 Seals: NBR/PU

TYPE
12:1 Pump stub
PART NO.
15767
DATA
Ratio: 12:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: 1 1/2" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 70 (198) Ø (length) mm

TYPE
10:1 Pump for drum
PART NO.
15765
DATA
Ratio: 10:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: - Outlet: 3/4" (F) BSP Pump tube: 54 (855) Ø (length) mm

TYPE
10:1 Stub pump
PART NO.
15766
DATA
Ratio: 10:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: 1 1/2" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 54 (200) Ø (length) mm

AIR OPERATED PUMPS

AIR OPERATED PUMPS

E80-Series



TYPE
15:1 Pumps
PART NO.
1 15740
2 15741
DATA
Ratio: 15:1
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Seals: PU / NBR
1 Pump tube: 32 (910) Ø (length) mm
2 Pump tube: 32 (235) Ø (length) mm

TYPE
Mobile oil dispenser for 60 l drum
PART NO.
1 137-13
2 137-14
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13762
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun, trolley. Drum NOT included.
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun with digital meter, trolley. Drum NOT included.

TYPE
Mobile oil dispenser w/ 65 l tank
PART NO.
1 137-17
2 137-18
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13762
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun, mobile 65 l tank
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun with digital meter, mobile 65 l tank



TYPE
3:1 Pump kit for 1.000 l IBC
PART NO.
1 137-09
2 137-10
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 6 m x 1/2" hose, oil gun, suction hose, pump bracket. IBC container NOT included.
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 6 m x 1/2" hose, oil gun with digital meter, suction hose, pump bracket. IBC container NOT included.

AIR OPERATED PUMPS

AIR OPERATED PUMPS



TYPE 3:1 Pump kit for 1.000 l IBC	TYPE 5:1 Pump kit for 1.000 l IBC	TYPE Mobile dispenser for 208 l drum	TYPE Mobile dispenser for 208 l drum
PART NO. 1 137-25 2 137-26	PART NO. 1 157-25 2 157-26	PART NO. 1 137-15 2 137-16 3 137-46	PART NO. 1 137-23 2 137-24
DATA Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13761 1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: S10 hose reel, oil gun, suction hose, IBC bracket. IBC container NOT included. 2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: S10 hose reel, oil gun with digital meter, suction hose, IBC bracket. IBC container NOT included.	DATA Maximum air pressure: 1,0 (10) MPa (bar) 1 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 5:1 oil pump, S15 hose reel, oil gun, suction hose, IBC bracket. IBC container NOT included. 2 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 5:1 oil pump, S15 hose reel, oil gun with digital meter, suction hose, IBC bracket. IBC container NOT included.	DATA Maximum air pressure: 1,0 (10) MPa (bar) 1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3:1 oil pump, 3m x 1/2" hose, oil gun with manual non drip nozzle, trolley. Drum NOT included. Pump: B13760 2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, manual non drip nozzle, trolley. Drum NOT included. Pump: B13760 3 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, automatic non-drip nozzle, trolley. Drum NOT included. Pump: B11740	DATA Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13760 1 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 3:1 oil pump, S10 hose reel, oil gun, trolley. Drum NOT included. 2 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 3:1 oil pump, S10 hose reel, oil gun with digital meter, trolley. Drum NOT included.



TYPE
Portable electric oil pumps
PART NO.
1 61012
2 61024
DATA
Capacity: 5,5 l/min free flow
Inlet: 3/4" (F) BSPT
Outlet: 1/2" (F) BSPT
IP: 55
Max suction height: 2,5 m
1 Voltage: 12 V DC
2 Voltage: 24 V DC

TYPE
Electric oil pumps 1,0 MPa
PART NO.
1 60100
2 60110
DATA
Capacity: 9 l/min free flow
Inlet: 3/4" (F) BSPT
Maximum working pressure: 1,0 (10) MPa (bar)
Voltage: 230 V AC
IP: 55
1 Outlet: 3/4" (F) BSPT
Motor: 600 W
Pressure switch: No
2 Outlet: 1" (F) BSPT
Motor: 600 W
Pressure switch: Yes

TYPE
Electric oil pumps 2,4 MPa
PART NO.
1 60300
2 60310
DATA
Capacity: 10 l/min free flow
Inlet: 3/4" (F) BSPT
Maximum working pressure: 2,4 (24) MPa (bar)
Voltage: 230 V AC
IP: 55
1 Outlet: 3/4" (F) BSPT
Motor: 600 W
Pressure switch: No
2 Outlet: 1" (F) BSPT
Motor: 780 W
Pressure switch: Yes

TYPE
Electric oil pumps HD
PART NO.
1 61614
2 61611
DATA
Inlet: 1" (F) BSPT
Outlet: 1" (F) BSPT
Maximum working pressure: 0,8 (8,0) MPa (bar)
1 Capacity: 50 l/min free flow
Motor: 1500 W
2 Capacity: 70 l/min free flow
Motor: 2000 W



TYPE
Electric transfer pump
PART NO.
1 60325 2 60327
DATA
Hose length: 2,5 m Riser tube length: 330-970 mm Cable length: 2 m 1 Capacity: 40 l/min free flow Voltage: 230 V AC 2 Capacity: 35 l/min free flow Voltage: 24 V DC

TYPE
Oil pump kit for 208 l drum
PART NO.
62020
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, suction tube, 2m outlet hose. Capacity: 10 l/min free flow Maximum working pressure: 2,4 (24) MPa (bar) Motor: 780 W Voltage: 230 V AC IP: 44

TYPE
Oil pump kit for Schütz-tanks
PART NO.
62021
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, 2m outlet hose. Capacity: 10 l/min free flow Maximum working pressure: 2,4 (24) MPa (bar) Motor: 780 W Voltage: 230 V AC IP: 44

TYPE
Oil pump kit for Schütz-tanks
PART NO.
62010
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, 4m outlet hose, digital meter, drip holster. Capacity: 9 l/min free flow Maximum working pressure: 1,0 (10) MPa (bar) Motor: 600 W Voltage: 230 V AC IP: 44



TYPE
Oil pump kit for Schütz-tanks
PART NO.
62011
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, outlet hose, oil bar.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC
IP: 44

TYPE
Oil pump kit for 208 l drum
PART NO.
1 61013 2 61025
DATA
Capacity: 4 l/min free flow
Maximum working pressure: 0,9 (9,0) MPa (bar)
1 Motor: 200 W
Voltage: 12 V DC
2 Motor: 200 W
Voltage: 24 V DC

TYPE
Mobile oil dispenser for 208 l drum
PART NO.
62100
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Includes: oil pump, suction hose, 3m hose, digital meter, trolley for 200l drum.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC

TYPE
Oil pump kit for 208 l drum or IBC
PART NO.
62000
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Includes: oil pump, suction hose, 3m hose, digital meter.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC



S10/S15-Series



S10/S15-Series



S10/S15-Series



TYPE
Oil pump kit for 208 l drum or IBC
PART NO.
62001
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body as well as a pressure switch that shuts off the pump when the outlet valve is closed. Includes: oil pump, pressure switch, suction hose, 3m hose, digital meter.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC

TYPE
S10 & S15 hose reels
PART NO.
1 17820 2 17837
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 10 m
Connection: 1/2" - 1/2" (F)-(M) BSP
2 Hose length: 15 m
Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Reel kit with oil control gun
PART NO.
1 317-12 2 317-13
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve (10377).
2 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with digital meter
PART NO.
1 317-14 3 317-14EF 2 317-15 4 317-15EF
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve with digital meter (10372).
2 Description: Includes: hose reel S15 15m, strainer, ball valve, oil control valve with digital meter.
3 Description: Includes: hose reel S10, strainer, ball valve, oil control valve with approved digital meter.
4 Description: Includes: hose reel S15, strainer, ball valve, oil control valve with approved digital meter.

S10/S15-Series



TYPE
Reel kit with mechanical meter
PART NO.
1 317-20
2 317-19
3 317-11
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve with mechanical meter (16719).
2 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve with mechanical meter (16719).
3 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

C15-Series



TYPE
C15 hose reel
PART NO.
1 17844
2 17840
3 17843
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 15 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP
2 Hose length: 10 m
Connection: 1/2" - 1/2" (F)-(M) BSP
3 Hose length: 15 m
Connection: 1/2" - 1/2" (F)-(M) BSP

C15-Series



TYPE
Reel kit with oil control gun
PART NO.
1 317-01
2 317-25
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve (10377).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve (10377).

C15-Series



TYPE
Reel kit with digital meter
PART NO.
1 317-03
2 317-26
DATA
Maximum working pressure: 7,5 (75) l/revolution
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve with digital meter (10372).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with digital meter (10372).

C15-Series



CC15-Series



CC15-Series



CC15-Series



TYPE
Reel kit with mechanical meter
PART NO.
1 317-04 2 317-27 3 317-28
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve with mechanical meter (16719).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with mechanical meter (16719).
3 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

TYPE
CC15 hose reel
PART NO.
1 17852 2 17853
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 10 (100) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 10 m
2 Hose length: 15 m

TYPE
Reel kit with oil control gun
PART NO.
1 316-12 2 316-13
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve (10377)
2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve (10377)

TYPE
Reel kit with digital meter
PART NO.
1 316-14 2 316-15
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve with digital meter (10372)
2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve with digital meter (10372)

CC15-Series



TYPE
Reel kit with mechanical meter
PART NO.
1 316-20
2 316-19
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve with mechanical meter (16719)
2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve with mechanical meter (16719)

T15-Series



TYPE
T15 hose reel
PART NO.
1 17833
2 17832
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

T15-Series



TYPE
Reel kit with oil control gun
PART NO.
317-05
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve (10377).

T15-Series



TYPE
Reel kit with digital meter
PART NO.
317-06
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with digital meter (10372).

HOSE REELS FOR OIL

HOSE REELS FOR OIL

T15-Series



T20-Series



T20-Series



T20-Series



TYPE
Reel kit with mechanical meter
PART NO.
1 317-07 2 317-08
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with mechanical meter (16719).
2 Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

TYPE
T20 hose reel
PART NO.
1 37845 2 17834 3 17836
DATA
Dimension: 12,5 (1/2") mm (inch)
1 Hose length: 20 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP
2 Hose length: 20 m
Connection: 1/2" - 1/2" (F)-(M) BSP
3 Hose length: 15 m
Connection: 3/4" -3/4" (F)-(M) BSP

TYPE
Reel kit with oil gun
PART NO.
317-21
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T20 20m 1/2" (17834), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with with H.V. oil gun
PART NO.
317-22
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T20 15m 3/4" (17836), strainer, ball valve, H.V oil control valve (16724).



T20-Series

TYPE
Reel kit with meter
PART NO.
1 317-23
2 317-09
3 317-10
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, H.V oil control valve with digital meter (16813).
2 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, oil control valve with mechanical meter (16719).
3 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).



T30-Series

TYPE
T30-series
PART NO.
1 17878
2 17879
3 17880
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 30 m max (without hose)
Connection: 3/4" - 1" (M)-(M) BSP
2 Hose length: 30 m max (without hose)
Connection: 1" - 1" (M)-(M) BSP
3 Hose length: 30 m
Connection: 1/2" - 1/2" (M)-(M) BSP



T30-Series

TYPE
T30-series
PART NO.
17881
DATA
Media: Oil/Diesel
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 25 m
Connection: 3/4" - 3/4" (F)-(M) BSP




T30-Series

TYPE
T30-series
PART NO.
17882
DATA
Media: Oil/Diesel
Dimension: 25,4 (1") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP

HOSE REELS FOR OIL

OIL METERS AND GUNS

F15-Series

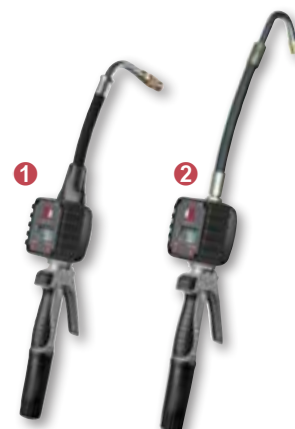

TYPE
F15-series
PART NO.
17885
DATA
Media: Oil/Diesel Dimension: 38,1 (1 1/2") mm (inch) Maximum pressure: 2,0 (20) MPa (bar) Hose length: 15 m Connection: 1 1/2" - 1 1/2" (M)-(M) BSP

TYPE
Mechanical hose end meter
PART NO.
1 16716 2 16719
DATA
Maximum working pressure: 7,0 (70) MPa (bar) Accuracy: 0,65 % ± Pre-set: 0,25 - 60 l Connection: 1/2" (F) BSP 1 Model: Pre-set mechanical meter for oil 1/2" (F) BSP Capacity: 20 l/min free flow 2 Model: Mechanical hand meter for oil 1/2" (F) BSP Capacity: 30 l/min free flow

TYPE
Hose end meter
PART NO.
10371
DATA
Model: Digital hand meter 90° hose auto- matic non-drip Capacity: 30 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP

TYPE
Hose end meter
PART NO.
1 10372 2 10391
DATA
Capacity: 30 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP 1 Model: Digital hand meter 90° hose ma- nual non-drip 2 Model: Digital hand meter 135° hose automatic non-drip

OIL METERS AND GUNS

OIL METERS AND GUNS



TYPE	
Pre-set hose end meter	
PART NO.	
1 10422	4 10472
2 10452	5 10491
3 10471	
DATA	
Media: Oil/Glycol	
Capacity: 0,8-30 l/min free flow	
Maximum working pressure: 10,0 (100) MPa (bar)	
Connection: 1/2" (F) BSP	
1 Model: Preset digital hand meter with adjustable outlet hose	
2 Model: Preset digital hand meter 60° outlet pipe and manual non-drip	
3 Model: Preset digital hand meter 90° outlet hose and automatic non-drip	
4 Model: Preset digital hand meter 90° outlet hose and manual non-drip	
5 Model: Preset digital hand meter 135° outlet hose and automatic non-drip	

TYPE
Hose end meter approvable
PART NO.
16717
DATA
Capacity: 1-10 l/min free flow
Maximum working pressure: 7,0 (70) MPa (bar)
Accuracy: 0,3 % ±
Connection: 1/2" (F) BSP

TYPE
H.V. Hose end meter
PART NO.
1 16813
2 16818
DATA
Capacity: 70 l/min free flow
Maximum working pressure: 10 (100) MPa (bar)
Accuracy: 0,5 % ±
1 Model: High volume electronic meter for oil, 60° outlet tube with manual non-drip nozzle 3/4" (F) BSP
2 Model: High volume electronic meter for oil, outlet hose with manual non-drip nozzle 3/4" (F) BSP

TYPE
In-line meter
PART NO.
1168817
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 10,0 (100) MPa (bar)
Voltage: 2x AAA 1,5 V DC
Accuracy: 0,5 % ±
Connection: 1/2" (F)-(F) BSP



TYPE	TYPE	TYPE	TYPE
In-line meter	Oil control gun w/ sight glass	Oil control gun	Oil control gun
PART NO.	PART NO.	PART NO.	PART NO.
1168820	10336EF	1 10305 2 10336	1 10377 2 10376 3 10396
DATA	DATA	DATA	DATA
Capacity: 80 l/min free flow Maximum pressure: 7 (70) MPa (bar) Voltage: 2x AAA 1,5 V DC Accuracy: 0,5 % ± Connection: 3/4" (F)-(F) BSP	Capacity: 40 l/min free flow Maximum working pressure: 10 (100) MPa (bar) Connection: 1/2" (F) BSP	Capacity: 40 l/min free flow Outlet: 1/2" (F) BSP Maximum working pressure: 10,0 (100) MPa (bar) Connection: 1/2" (F) BSP 1 Model: Oil control gun without outlet 2 Model: Oil control valve with 60° pipe, automatic non-drip	Capacity: 40 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Connection: 1/2 (F) BSP 1 Model: Oil control gun with 90° flexible outlet, manual non-drip 2 Model: Oil control valve 90° automatic non-drip 3 Model: Oil control gun, 135° flexible outlet with automatic non-drip nozzle



TYPE
H.V. Control gun
PART NO.
1 16724
2 16721
DATA
Capacity: 70 l/min free flow
Maximum working pressure: 10 (100) MPa (bar)
Connection: 3/4" (F) BSP
1 Model: High volume oil control gun with 30° pipe, manual non-drip
2 Model: High volume oil control gun with flexible outlet, manual non-drip

TYPE
Oil bar
PART NO.
1 16755
2 16703
3 16708
DATA
Connection: 1/2" (F) BSP
1 Model: Oil bar with one valve
2 Model: Outlet valve for oil bar 16755
3 Model: Oil bar valve stainless steel

TYPE
Calibration measure
PART NO.
43420
DATA
Description: Used when calibrating meters. Measurement division per 5 cl.

TYPE
Nozzles
PART NO.
1 1167431
2 1169350
3 1169340
4 1169360
DATA
1 Model: Automatic non-drip nozzle M12x1 mm
2 Model: Automatic non-drip nozzle 1/4" (F) BSP
3 Model: Non-drip nozzle manual 1/4" (F) BSP
4 Model: Colour coded protectors for outlet hoses, kit of 4

OIL METERS AND GUNS

HAND OPERATED EQUIPMENT



TYPE
Outlet hose with non-drip nozzle
PART NO.
1 1168683 5 1168595 2 1167744 6 1168686 3 1168684 7 1167783 4 1168591
DATA
Connection: 1/2" (M) BSP 1 Model: Rigid outlet 60° with manual non-drip 2 Model: Outlet tube 60° with automatic non-drip 3 Model: Outlet hose 90° with automatic non-drip 4 Model: Outlet hose 90° with manual non-drip 5 Model: Outlet hose straight with automatic non-drip 6 Model: Outlet hose formable with manual non-drip nozzle 7 Model: Outlet hose 135° with automatic non-drip

TYPE
Drum pump with telescopic suction tube
PART NO.
10720
DATA
Description: Hand operated pump for oil and diesel. Telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids. Capacity: 0,45 l/stroke For container: 60-208 l

TYPE
Drum pump with outlet hose and spout 60-208 l
PART NO.
1 16780 2 16789
DATA
Capacity: 0,1 l/stroke 1 Description: Hand operated pump for gear oil. 2" drum adaptor, 1,5m outlet hose with ball valve and 135° spout included. Do not use with flammable or corrosive fluids. For container: 208 l 2 Description: Hand operated pump for gear oil. 2" drum adaptor, 1,5m outlet hose with ball valve and 135° spout included. Do not use with flammable or corrosive fluids. For container: 60 l

TYPE
950 Lever pumps 60-208 l
PART NO.
1 0950-100 2 0950-100-BL 3 0950-100-YE
DATA
Capacity: 0,33 l/stroke Pump tube: 575 - 965 mm



TYPE
Accessories for 950 pumps
PART NO.
1 0950-700 2 1050-800
DATA
1 Model: Hose nipple 950 19 (3/4) mm (inch) 2 Model: Tube extension 950 & AF1

TYPE
Drum pump 60-208 I
PART NO.
11645
DATA
Description: Hand operated pump for oil and diesel. Telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids. Capacity: 0,5 l/stroke Pump tube: 350 - 980 mm

TYPE
Hand operated pumps
PART NO.
1 1470-100 2 10730 3 0960-000
DATA
1 Description: A high quality pump for oil and diesel, with a telescopic pump tube and a 2" drum adapter. Do not use on flammable or corrosive liquids. Capacity: 0,3 l/revolution 2 Description: Sturdy model for oil and diesel, telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids. Capacity: 0,3 l/revolution 3 Description: For gear oil, equipped with telescopic tube, 2" drum adaptor and 1.5m hose c.w. ball valve. Do not use with flammable or corrosive fluids. Capacity: 0,1 l/stroke

TYPE
Mobile oil dispenser
PART NO.
137-37
DATA
Description: For filling up gear oil or topping oil levels. Equipped with hand operated pump and 1.5 m outlet hose c.w. ball valve. Do not use with flammable or corrosive fluids. Capacity: 0,1 l/stroke Volume: 25 l

HAND OPERATED EQUIPMENT

HAND OPERATED EQUIPMENT



TYPE
Pressurized oil dispenser
PART NO.
137-36
DATA
Description: Air-operated gear oil dispensers for filling or topping up oil levels. Equipped with 1.5m outlet hose and oil gun. Do not use with flammable or corrosive fluids.
Maximum air pressure: 0,3 (3,0) - 0,7 (7,0) MPa (bar)
Volume: 25 l

TYPE
Pressurized oil dispenser with digital meter
PART NO.
137-38
DATA
Description: Air-operated gear oil dispensers for filling or topping up oil levels. Equipped with 1.5m outlet hose and oil gun with digital meter. Do not use with flammable or corrosive fluids.
Maximum air pressure: 0,3 (3,0) - 0,7 (7,0) MPa (bar)
Volume: 25 l
Meter: 10300

TYPE
Portable oil dispenser
PART NO.
137-35
DATA
Description: Equipped with hand operated pump and 1.5 m outlet hose c.w. ball valve. Do not use with flammable or corrosive fluids.
Capacity: 0,1 l/stroke
Volume: 17 l

TYPE
Oil suction gun
PART NO.
10710
DATA
Description: Do not use with flammable or corrosive fluids.
Capacity: 0,5 l/stroke
Hose length: 290 mm




TYPE
Pressure relief valve kit
PART NO.
1 16764
2 16765-60
DATA
1 Outlet: 1/8" (M) BSP
Connection: 3/4" (F)-(M) BSP
2 Outlet: 1/8" (M) BSP
Connection: 1/4" (M) BSP

TYPE
Suction tube for drums and tanks
PART NO.
1 16750
2 16751
DATA
1 Hose length: 2 m
Riser tube length: 1040 mm
Connection: 3/4" - 1" (F)-(M) BSP
2 Hose length: 2 m
Riser tube length: 1600 mm
Connection: 3/4" - 1" (F)-(M) BSP

TYPE
Suction tubes
PART NO.
1 16753
2 16754
DATA
Material: Steel
Connection: 3/4" (M) BSP
1 Length: 600-1085 mm
2 Length: 1062-2012 mm

TYPE
Outlet hoses
PART NO.
1 16740
2 16741
3 16742
4 16743
5 16744
6 16745
7 16746
DATA
Dimension: 12,5 (1/2") mm (inch)
Thread: 1/2" - 1/2" (F)-(F) BSP
Adaptor: 3/4" - 1/2" (M)-(M) BSP
1 Hose length: 2 m
2 Hose length: 3 m
3 Hose length: 4 m
4 Hose length: 5 m
5 Hose length: 6 m
6 Hose length: 8 m
7 Hose length: 10 m






TYPE
Connection hoses
PART NO.
1 16735 2 16737 3 16747
DATA
1 Dimension: 25,4 (1") mm (inch) Thread: 1" - 1" (F)-(M) BSP Hose length: 1 m 2 Dimension: 19 (3/4") mm (inch) Thread: 3/4" - 3/4" (F)-(F) BSP Hose length: 1,5 m 3 Dimension: 50,8 (2") mm (inch) Thread: 2" - 2" (F)-(F) BSP Hose length: 0,7 m

TYPE
Oil filter with ball valve
PART NO.
1 16710-50 2 16711-50
DATA
Maximum working pressure: 5,0 (50) MPa (bar) 1 Connection: 1/2" (F) BSP 2 Connection: 3/4" (F) BSP

TYPE
Ball valves for oil / air / water
PART NO.
1 1887257 4 1367258 2 1887260 5 1367259 3 1367262
DATA
1 Maximum working pressure: 2,5 (25) MPa (bar) Connection: 1/4" (F) BSP 2 Maximum working pressure: 6,4 (64) MPa (bar) Connection: 3/8" (F) BSP 3 Maximum working pressure: 5,0 (50) MPa (bar) Connection: 1/2" (F) BSP 4 Maximum working pressure: 5,0 (50) MPa (bar) Connection: 3/4" (F) BSP 5 Maximum working pressure: 5,0 (50) MPa (bar) Connection: 1" (F) BSP

TYPE
Bonded seals
PART NO.
1 1367264 4 1367422 2 1367265 5 1367266 3 1367347
DATA
1 Dimension: 1/4" 2 Dimension: 3/8" 3 Dimension: 1/2" 4 Dimension: 3/4" 5 Dimension: 1"



TYPE	
Straight adapters	
PART NO.	
1 1367267	5 1367268
2 1367271	6 1367270
3 1317181	7 1367269
4 1317180	
DATA	
1 Thread: 1/4" - 1/4" (M)-(M) BSP	
2 Thread: 3/8" - 3/8" (M)-(M) BSP	
3 Thread: 1/2"-1/2" (M)-(M) BSP	
4 Thread: 3/4"-1/2" (M)-(M) BSP	
5 Thread: 3/4" - 3/4" (M)-(M) BSP	
6 Thread: 1" - 3/4" (M)-(M) BSP	
7 Thread: 1" - 1" (M)-(M) BSP	


TYPE	
Tapered adapters	
PART NO.	
1 1367587	
2 1357676	
3 1367594	
DATA	
1 Thread: 1/4" - 1/4" (M)-(M) BSP - BSPT	
2 Thread: 3/8" - 3/8" (M)-(M) BSP - BSPT	
3 Thread: 1/2" - 1/2" (M)-(M) BSP - BSPT	

TYPE	
Pump brackets	
PART NO.	
1 16730	
2 16733	
DATA	
1 Connection: 2" (F) BSP	
2 Connection: 2" (F) BSP	

TYPE	
Bracket for H.D. pumps	
PART NO.	
1 16705	
2 16709	
DATA	
1 Description: For installation of wall mounted air operated HD pumps.	
2 Description: For installation of air operated HD pumps.	



TYPE IBC pump and reel bracket	TYPE Bracket with carrying handle for electric pumps	TYPE Drip holster	TYPE Drum adapters 26-38 mm
PART NO. 1069237	PART NO. 16749	PART NO. 1 16781 3 16752 2 16782 4 16767	PART NO. 1 1117701 5 1117705 2 1117704 6 1117178 3 1117718 7 1118436 4 1137123 8 1117707
DATA Description: Bracket for installation of our air operated pumps and hose reels on an IBC tank. Fits our Reels: S10, S15, CC15, C15 and T15. Connection: 2" (F) BSP	DATA Description: For electrical pumps	DATA 1 Model: Drip holster Description: Wall mounted drip pockets for hose end meters and oil guns. Bleeder valve included. 2 Model: Drip pocket and gun holder Description: Wall mounted drip pocket for hose end meters and oil guns, removable drip tray. 3 Model: Drip pocket and gun holder for drums Description: Connects to 3/4" thread in the drum. 4 Model: Drip holster with separate drip container. Description: To protect hose end meters and control valves when not in use and to collect any oil drips.	DATA Connection: 2" (M) BSP 1 Dimension: Ø26 mm 2 Dimension: Ø28 mm 3 Dimension: Ø30 mm 4 Dimension: Ø32 mm 5 Dimension: Ø34 mm 6 Dimension: Ø35 mm 7 Dimension: Ø36 mm 8 Dimension: Ø38 mm

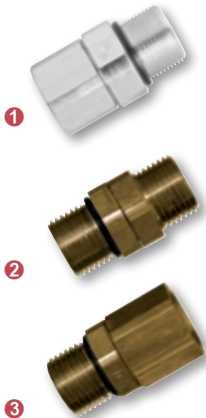

TYPE
Drum adapter 40-54 mm
PART NO.
1 1157234 4 1155153
2 1117610 5 1117277
3 1117065
DATA
Connection: 2" (M) BSP
1 Dimension: Ø40 mm
2 Dimension: Ø42 mm
3 Dimension: Ø50 mm
4 Dimension: Ø52 mm
5 Dimension: Ø54 mm

TYPE
Swivel for oil
PART NO.
1 1568507
2 3368519
3 3368520
DATA
1 Thread: 1/2 -1/2" (F)-(M) BSP
2 Thread: 1/2" - 1/2" (M)-(M) BSP
3 Thread: 1/2" - 1/2" (F)-(M) BSP

TYPE
General purpose oiler
PART NO.
1 16785
2 16786
3 16787
DATA
1 Volume: 0,125 l
2 Volume: 0,25 l
3 Volume: 0,5 l

TYPE
Oiler with flexible spout
PART NO.
16788
DATA
Volume: 0,3 l



TYPE	
Plastic measure with flex spout	
PART NO.	
1 16770	3 16772
2 16771	4 16773
DATA	
1 Volume: 1,0 l	
2 Volume: 2,0 l	
3 Volume: 3,0 l	
4 Volume: 5,0 l	

TYPE	
Graded plastic measures	
PART NO.	
1 16776	3 16778
2 16777	4 16779
DATA	
1 Volume: 1,0 l	
2 Volume: 2,0 l	
3 Volume: 3,0 l	
4 Volume: 5,0 l	

TYPE	
Plastic funnels	
PART NO.	
1 16760	3 16763
2 16761	4 16756
DATA	
1 Model: Off-set funnel 160mm	
2 Model: Funnel 190 mm with flexible spout	
3 Model: Rectangular funnel	
4 Model: Funnel kit Ø65, 75, 100 & 120 mm	

TYPE	
Cans	
PART NO.	
1 16783	
2 16784	
DATA	
1 Volume: 6 l	
2 Volume: 11 l	

NOTES

Grease equipment

Air operated grease pumps	66
Grease pump kits	71
Hose reels for grease	75
Equipment for grease	76
Battery operated grease guns	78
Grease control valves and accessories	79
Drum covers and accessories	81
Grease fittings	84

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS



TYPE
55:1 Pump for 18-180 kg drum
PART NO.
1 25765
2 25766
3 25767
DATA
Ratio: 55:1
Capacity: 540 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 1/4" (F) BSPT
Seals: NBR / PTFE
1 Pump tube: 26 (920) Ø (length) mm
2 Pump tube: 26 (725) Ø (length) mm
3 Pump tube: 26 (510) Ø (length) mm

TYPE
60:1 Pump for 18-180 kg drum
PART NO.
1 25735
2 25736
3 25737
DATA
Ratio: 60:1
Capacity: 1100 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/8" (F) BSPT
Seals: PU / PTFE
1 Pump tube: 30 (930) Ø (length) mm
2 Pump tube: 30 (750) Ø (length) mm
3 Pump tube: 30 (450) Ø (length) mm

TYPE
80:1 Pump for 18-180 kg drum
PART NO.
1 25795
2 25796
3 25794
DATA
Ratio: 80:1
Capacity: 1100 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/8" (F) BSPT
Seals: PU / NBR
1 Pump tube: 30 (940) Ø (length) mm
2 Pump tube: 30 (760) Ø (length) mm
3 Pump tube: 30 (460) Ø (length) mm

TYPE
Inlet filter
PART NO.
2150210
DATA
Description: Fits the following pumps:
• 25735, -36, -37 and
• 25794, -95, -96

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS



C115-Series



C115-Series



C115-Series



TYPE
60:1 HD Pump for 50-180 kg drum
PART NO.
1 25710 2 25711 3 25712
DATA
Ratio: 60:1 Capacity: 2,0 kg/min Air connection: 3/8" (F) BSP Maximum air pressure: 1,0 (10) MPa (bar) Outlet: 3/8" (F) BSP Seals: FKM / PTFE / NBR 1 Pump tube: 35 (925) Ø (length) mm 2 Pump tube: 35 (730) Ø (length) mm 3 Pump tube: 35 (516) Ø (length) mm

TYPE
40:1 HD Pump for 50-180 kg drum
PART NO.
1 25745 2 25746
DATA
Ratio: 40:1 Capacity: 11 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Seals: PE / PTFE / NBR 1 Pump tube: 50 (855) Ø (length) mm 2 Pump tube: 50 (650) Ø (length) mm

TYPE
70:1 HD Pump for 50-180 kg drum
PART NO.
1 25730 2 25731
DATA
Ratio: 70:1 Capacity: 7,5 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Seals: PE / PTFE / NBR 1 Pump tube: 50 (855) Ø (length) mm 2 Pump tube: 50 (650) Ø (length) mm

TYPE
70:1 HD Pump for bulk tank
PART NO.
25732
DATA
Ratio: 70:1 Capacity: 7,5 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Pump tube: 50 (490) Ø (length) mm Seals: PE / PTFE / NBR

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS



C150-Series



E80-Series



C115-Series



C150-Series

TYPE
80:1 HD Pump for 50-180 kg drum
PART NO.
1 25787
2 25788
DATA
Ratio: 80:1
Capacity: 8 kg/min
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,4 (14) MPa (bar)
Outlet: 1/2" (F) BSP
Seals: PE / PTFE / NBR
1 Pump tube: 50 (855) Ø (length) mm
2 Pump tube: 50 (650) Ø (length) mm

TYPE
15:1 Transfer pump for 18-180 kg drum
PART NO.
1 15740
2 15741
DATA
Ratio: 15:1
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Seals: PU / NBR
1 Pump tube: 32 (910) Ø (length) mm
2 Pump tube: 32 (235) Ø (length) mm

TYPE
25:1 Transfer pump for 180 kg drum
PART NO.
25725
DATA
Ratio: 25:1
Capacity: 16 kg/min
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,4 (14) MPa (bar)
Outlet: 1/2" (F) BSP
Pump tube: 70 (855) Ø (length) mm
Seals: PE / PTFE / NBR

TYPE
12:1 Transfer pump for bulk tank
PART NO.
25720
DATA
Ratio: 12:1
Capacity: 40 kg/min
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,4 (14) MPa (bar)
Outlet: 1" (F) BSP
Pump tube: 70 (226) Ø (length) mm
Seals: PE / PU / NBR / PTFE



TYPE	TYPE	TYPE	TYPE
Cam-Lock adapters	Mobile grease pump hoist for 12-20 kg	Grease pump and hoist	Pump hoist for lifting eye
PART NO.	PART NO.	PART NO.	PART NO.
1 2357404 2 2357405	26746	26742	26741
DATA	DATA	DATA	DATA
1 Description: Allow to fit a pump horizontally or vertically to grease bags, totes and other type of containers. Fixes to a C115- or C150-series pump body. Standard 3" male cam-lock connection.	Description: Mobile unit designed for use with hard to pump, sticky and high viscosity greases up to NLGI3. A pneumatic piston elevates the pump for replacing an empty pail. The pneumatic piston also pushes down when the pump is in use.	Ratio: 60:1 Pump: 25737 Description: Mobile unit designed for use with hard to pump, sticky and high viscosity greases up to NLGI3. A pneumatic piston elevates the pump for replacing an empty pail. The pneumatic piston also pushes down when the pump is in use.	Height: 1630 - 2630 mm Description: Lifts and lowers pumps, making drum changes easier, faster and more efficient. Swings 360° around it's own axis, serving up to three pumps / barrels. Air operated.
2 Description: Allow to fit a pump horizontally or vertically to grease bags, totes and other type of containers. Standard 3" female cam-lock connection.	It is ideal for situations where it is important to get all the grease out of the bucket. Applications include expensive grease where complete emptying is essential, dented buckets/drums that cause the follower lid to stick, and easy handling of the grease to avoid debris that can damage the pump or machine. Delivered without pump.	It is ideal for situations where it is important to get all the grease out of the bucket. Applications include expensive grease where complete emptying is essential, dented buckets/drums that cause the follower lid to stick, and easy handling of the grease to avoid debris that can damage the pump or machine.	
	Includes outlet hose 3 m, Z-swivel and grease control valve. Pump sold separately.	Complete kit with pump hoist, pump 60:1, outlet hose 3 m, Z-swivel and grease control valve.	



TYPE
Pump hoist
PART NO.
26705
DATA
Height: 1630 - 2630 mm
Description: The Eurolube Pump Hoist offers better performance, ease of use and safe handling. Compact and robust design. The lift can be rotated, this feature allows 3 grease drums to be in position for quick change to a new grease drum. Robust lever valve for UP/DOWN control of the lift.

TYPE
Single post pump hoist 40:1
PART NO.
257-55
DATA
Maximum air pressure: 1,4 (14) MPa (bar)
Pump: 25745
Description: Offers better performance, easy use and safe handling.
Robust follower plate 550-590mm with rubber blade wiper to ensure positive sealing of greases. Compact and robust design. the lift can be rotated, this feature makes it possible to have 3 grease drums in position, for a quick change to a new grease drum. Robust lever valve for UP/DOWN control of the hoist.

TYPE
Single post pump hoist 70:1
PART NO.
257-56
DATA
Maximum air pressure: 1,4 (14) MPa (bar)
Pump: 25730
Description: Offers better performance, easy use and safe handling.
Robust follower plate 550-590mm with rubber blade wiper to ensure positive sealing of greases. Compact and robust design. the lift can be rotated, this feature makes it possible to have 3 grease drums in position, for a quick change to a new grease drum. Robust lever valve for UP/DOWN control of the hoist.

TYPE
Power Ram pump hoist 40:1
PART NO.
257-51
DATA
Description: The power Ram pump hoists offer better performance, easy use and safe handling, powered by Ø80mm twin-post pressure primers. Robust one-piece aluminium follower plate with twin rubber blade wipers to ensure positive sealing of high-viscosity greases. built in automatic low level shut of valve, that prevents dry pumping and protect the pump. pivotable air control box, with two air regulators, one for pump control and one for hoist control. ON/OFF push button for pump control. Robust lever valve for UP/DOWN control of the hoist. Includes: pump, pump hoist, quick coupling, filter regulator, air line hose, grease hose, follower plate.
Capacity: 11000 gr/min
Air connection: 1/2" (F) BSP
Pump: 25746

AIR OPERATED GREASE PUMPS

GREASE PUMP KITS



TYPE
Power Ram pump hoist 70:1
PART NO.
257-52
DATA
Description: The power Ram pump hoists offer better performance, easy use and safe handling, powered by Ø80mm twin-post pressure primers. Robust one-piece aluminium follower plate with twin rubber blade wipers to ensure positive sealing of high-viscosity greases. built in automatic low level shut of valve, that prevents dry pumping and protect the pump. pivotable air control box, with two air regulators, one for pump control and one for hoist control. ON/OFF push button for pump control. Robust lever valve for UP/DOWN control of the hoist. Includes: pump, pump hoist, quick coupling, filter regulator, air line hose, grease hose, follower plate.
Capacity: 7500 gr/min
Air connection: 1/2" (F) BSP
Pump: 25731

TYPE
Power Ram hoist without pump
PART NO.
26700
DATA
Description: The Power Ram pump hoist ensures enhanced performance, user-friendly operation, and safety. It features twin Ø80mm cylinders for efficient grease input and a durable aluminium follower plate with dual sealing lips, maintaining cleanliness while handling high-viscosity greases. The standard automatic low-level stop prevents dry pumping, safeguarding the pump. Its swivelling control unit includes built-in regulators—one for pump control and another for hoist control—with ON/OFF buttons for pump operation and a sturdy lever valve for hoist movement.

TYPE
Pump kit for 185 kg drums
PART NO.
① 257-32 ② 257-32FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
① Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25735, quick coupler, filter regulator, air line hose 1/4" x 1,5m, grease hose 3/8" x 2m, drum cover, ball valve, nipples.
For container: 180 kg
② Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25735, quick coupler, filter regulator, air line hose 1/4"x1,5m, grease hose 3/8"x2m, drum cover, follower plate, ball valve, nipples.
For container: 180 kg

TYPE
Pump kit for 50 kg drums
PART NO.
① 257-31 ② 257-31FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
① Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25736, quick coupler, filter regulator, air line hose 1/4"x1,5m, grease hose 3/8" x 2m, drum cover, ball valve, nipples.
For container: 50-60 kg
② Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25736, quick coupler, filter regulator, air line hose 1/4" x 1,5m, grease hose 3/8" x 2m, drum cover, follower plate, ball valve, nipples.
For container: 50-60 kg



TYPE
Mobile greaser 185 kg
PART NO.
1 257-39
2 257-39FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 4 m, trolley, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 4m, trolley, drum cover, follower plate.

TYPE
Mobile greaser 185 kg
PART NO.
1 257-40
2 257-40FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, hose Reel S15, H.D. trolley, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, hose Reel S15, H.D. trolley, drum cover, follower plate.

TYPE
Deluxe greaser 50 kg
PART NO.
1 257-35
2 257-35FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, Deluxe trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, Deluxe trolley, follower plate.

TYPE
Mobile greaser 50 kg
PART NO.
1 257-33
2 257-33FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.

GREASE PUMP KITS

GREASE PUMP KITS



TYPE
Deluxe greaser 20 kg
PART NO.
1 257-34 2 257-34FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, Deluxe trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, follower plate, Deluxe trolley.

TYPE
Mobile greaser 20 kg
PART NO.
1 257-37 2 257-37FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, drum cover, trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, drum cover, follower plate, trolley.

TYPE
Portable greaser 15-20 kg
PART NO.
1 257-36 2 257-36FP 3 257-03FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover.
For container: 20 kg
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.
For container: 20 kg
3 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.
For container: 15-18 kg

TYPE
Transfer pump for grease
PART NO.
1 257-05 2 257-06
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Filling pump for large volumes of grease into containers for central lubrication, in production, sliding board trucks, etc. Includes: 4m x 5/8" hose, H.V. Dispensing gun, H.D. trolley. Drum not included.
2 Description: Filling pump for large volumes of grease into containers for central lubrication, in production, sliding board trucks, etc. Includes: 4m x 5/8" hose, digital meter, H.D. trolley. Drum not included.

GREASE PUMP KITS

GREASE PUMP KITS



TYPE
Centralized lubrication filler pump 3:1
PART NO.
1 137-21 2 137-22
DATA
1 Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. For grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 20kg, Includes: 3:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling.
Capacity: 6 kg/min
2 Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. For grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 50kg, Includes: 3:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling.
Capacity: 6 kg/min

TYPE
Centralized lubrication filler pump 15:1
PART NO.
257-22
DATA
Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. for grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 50kg, Includes: 15:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling ISO7241-1.
For container: 50 kg
Maximum air pressure: 1,0 (10) MPa (bar)

TYPE
Centralized filler pumps
PART NO.
1 20720 2 20721
DATA
1 Description: Sturdy hand operated pump for quick, safe and clean re-filling of buckets in chassis lube systems. Capacity: 80gr per stroke. Includes: hand pump, drum cover, 1.5m hose c/w quick coupling.
Capacity: 80 gr/stroke
For container: 12-15 kg
2 Description: Sturdy hand operated pump for quick, safe and clean re-filling of buckets in chassis lube systems. Capacity: 80gr per stroke. Includes: hand pump, drum cover, 1.5m hose c/w quick coupling.
Capacity: 80 gr/stroke
For container: 20 kg

TYPE
Grease filler pump for grease guns
PART NO.
1 20710 2 20711 3 20712
DATA
Packaging LxWxH: 0,78 x 0,13 x 0,35 m
1 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 12-15 kg
2 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 20 kg
3 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 50 kg

GREASE PUMP KITS

HOSE REELS FOR GREASE



TYPE
Adapter MLS cartridge
PART NO.
1 26738 2 2169270
DATA
1 Model: Adapter for MLS / Lube-Shuttle Cartridges Connection: 1/4" (M) BSP 2 Model: Dust cover Connection:

TYPE
Empty MLS cartridge
PART NO.
2169180
DATA
Model: Empty MLS / Lube-Shuttle cartridge

TYPE
Loader nipple
PART NO.
26784
DATA
Description: For re-filling grease lever pumps using filler pumps. Male part. The corresponding female coupler is found on filler pumps 20710, 20711 & 20712. Dimension: Ø12 mm Connection: 1/8" (M) BSP

TYPE
S10/S15-Series
PART NO.
1 27837 2 27835 3 27834
DATA
Dimension: 10 (3/8") mm (inch) Maximum pressure: 35 (350) MPa (bar) 1 Hose length: 10 m max (without hose) Connection: 3/8" - 3/8" (M)-(M) BSP 2 Hose length: 15 m max (without hose) Connection: 3/8" - 3/8" (M)-(M) BSP 3 Hose length: 15 m Connection: 3/8" - 3/8" (M)-(M) BSP



C15/T15-Series



S15/T15-Series



CC15/T20-Series



TYPE	
T15/C15-Series	
PART NO.	
1 27841	3 27833
2 27840	4 27832
DATA	
Dimension: 10 (3/8") mm (inch)	
Maximum pressure: 35 (350) MPa (bar)	
1 Hose length: 15 m max (without hose)	
Connection: 3/8" - 3/8" (M)-(M) BSP	
2 Hose length: 15 m	
Connection: 3/8" - 3/8" (M)-(M) BSP	
3 Hose length: 15 m max (without hose)	
Connection: 3/8" - 3/8" (M)-(M) BSP	
4 Hose length: 15 m	
Connection: 3/8" - 3/8" (M)-(M) BSP	

TYPE	
Reel kit with grease gun	
PART NO.	
1 327-04	
2 327-12	
DATA	
Maximum pressure: 35 (350) MPa (bar)	
1 Description: Includes: hose reel T15 15m (27832), z-swivel, grease gun (26716), ball valve.	
2 Description: Includes: hose reel S15 15m (27834), z-swivel, grease gun (26716), ball valve.	

TYPE	
T20/CC15-Series	
PART NO.	
1 27850	
2 27852	
3 27853	
DATA	
1 Dimension: 12,5 (1/2") mm (inch)	
Maximum pressure: 27,5 (275) MPa (bar)	
Hose length: 20 m	
Connection: 1/2" - 1/2" (M)-(M) BSP	
2 Dimension: 6,35 (1/4") mm (inch)	
Maximum pressure: 35 (350) MPa (bar)	
Hose length: 10 m	
Connection: 1/4" - 1/4" (M)-(M) BSP	
3 Dimension: 10 (3/8") mm (inch)	
Maximum pressure: 35 (350) MPa (bar)	
Hose length: 15 m	
Connection: 3/8" - 1/4" (F)-(M) BSP	

TYPE	
Lever grease pump pro	
PART NO.	
1 500	
2 555	
DATA	
1 Description: Heavy duty lever grease gun for professional use, filler nipple included. Equipped with ergonomic handle. For bulk grease or 400 gram cartridge. Capacity: 1.3 cm³ per stroke.	
Capacity: 1,3 gr/stroke	
Maximum pressure: 70 (700) MPa (bar)	
Volume: 450 gram	
2 Description: Heavy duty lever grease gun for professional use. Equipped with ergonomic handle. For 400 gram cartridge. Capacity: 1 cm³ per stroke.	
Capacity: 0,8 gr/stroke	
Maximum pressure: 45 (450) MPa (bar)	
Volume: 450 gram	



TYPE
Lever grease pump industrial
PART NO.
1 1056-SE4 2 1056-LE4
DATA
Maximum pressure: 70 (700) MPa (bar)
1 Description: Filler nipple included. Equipped with ergonomic handle. For bulk grease or 400 gram cartridge. Capacity: 1.1 gr (high pressure) or 1.8 gr (high volume) per stroke.
Capacity: 1,1 / 1,8 gr/stroke
Volume: 450 gram
2 Description: Filler nipple included. Equipped with ergonomic handle. For bulk grease or 680 gram cartridge. Capacity: 1.1 gr (high pressure) or 1.8 gr (high volume) per stroke.
Capacity: 1,1 / 1,8 gr/stroke
Volume: 680 gram

TYPE
Lever grease pump standard duty
PART NO.
1 20701 2 20702 3 20703
DATA
1 Description: Hand operated grease gun for quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge, Capacity: 1 cm ³ /stroke.
Capacity: 0,8 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
2 Description: Heavy duty lever grease pump with variable stroke. Equipped with ergonomic handle. Includes filler nipple and bleeder valve. For bulk grease or 400 gram cartridge Capacity: 1 cm ³ per stroke.
Capacity: 0,8 gr/stroke
Maximum pressure: 70 (700) MPa (bar)
3 Description: Hand operated grease gun for quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge. Capacity: 1 cm ³ per stroke. Delivered with replaceable outlet tube and hydraulic connector.
Capacity: 0,8 gr/stroke
Maximum pressure: 45 (450) MPa (bar)

TYPE
Two hand lever grease gun with magnet
PART NO.
1 20705 3 2315627 2 2315625 4 2315629
DATA
Maximum pressure: 80 (800) MPa (bar)
1 Model: Lever grease pump with magnet
Description: Easier, cleaner and faster. For use the international 400 g lubricant cartridge, Ø53 x 237 mm. Capacity 2,5 g/stroke (NLGI 2). Supplied with spare followers.
2 Model: Follower plate kit 24pcs for 20705
Description: Protects the grease from dirt as well as creating a vacuum in regular 400gr cartridges as the 20705 grease gun does not use a traditional grease tube.
3 Model: Screw cartridge adapter MLS for Speedy Grease Aluminium
Description: Accessory for use of MLS / Lube-Shuttle screw-in type grease cartridges.
4 Model: Screw cartridge adapter MLS for Speedy Grease PA / Nylon
Description: Tillbehör för att kunna använda fettpatroner av MLS / skruvtyp.

TYPE
Lever grease gun standard duty 1000 cm ³
PART NO.
20706
DATA
Description: For use either with bulk grease (filled by hand or by loader pump).
Capacity: 0,8 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
Volume: 1000 cm ³



TYPE
High pressure pump with container
PART NO.
1 20742
2 20745
DATA
1 Capacity: 10/15/20 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
Volume: 16 kg
Hose length: 1,5 m
2 Capacity: 2 gr/stroke
Maximum pressure: 50 (500) MPa (bar)
Volume: 5 kg
Hose length: 2 m

TYPE
High pressure greaser
PART NO.
1 20730
2 20731
DATA
Capacity: 2 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
1 For container: 12-15 kg
2 For container: 20 kg

TYPE
Accessories for lever grease guns
PART NO.
1 26735
2 26736
3 26737
4 26781
5 26782
6 26783
DATA
1 Description: Magnet holder for grease lever pumps. Simplifies lubrication operations by freeing up one hand.
2 Description: Tube and adapter for MLS / Lube-Shuttle cartridges. Only for 20701, 20702, 20703
3 Description: Tube and adapter for MLS / Lube-Shuttle cartridges. Only for 500, 1056, 555 etc.
4 Description: Adapter accordion cartridge Red for hand pump.
5 Description: Adapter accordion cartridge aluminum for Speedy Grease.
6 Description: Adapter accordion cartridge Red for battery operated pump.

TYPE
20V Battery operated grease gun
PART NO.
1 25532
2 25534
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Description: Delivers up to 24 grease cartridges per charge free flow. LCD-display which shows battery status, grease meter, remaining grease in grease tube, warns if fitting is clogged, if grease tube has air pockets or is empty. Built in LED work light. Includes: Battery powered grease gun 20V, 1pc 20V 2Ah Lithium-Ion battery, battery charger 230V, hose 1100mm with hydraulic nozzle.
2 Description: Delivers up to 40 grease cartridges per charge free flow. LCD-display which shows battery status, grease meter, remaining grease in grease tube, warns if fitting is clogged, if grease tube has air pockets or is empty. Built in LED work light. Includes: Battery powered grease gun 20V, 1pc 20V 4Ah Lithium-Ion battery, battery charger 230V, hose 1100mm with hydraulic nozzle.

BATTERY OPERATED GREASE GUNS

GREASE CONTROL VALVES AND ACCESSORIES



TYPE
20V Battery operated grease gun
PART NO.
1 596-C1 2 596-D1
DATA
Maximum pressure: 69 (690) MPa (bar)
1 Description: Deliver up to 24 cartridges per charge. Includes: 20V 2,5Ah Lithium-Ion battery, 0,9 m hose, 220V charger, carrying case, LCD display showing: grease meter, remaining grease, battery level, clogged fitting. Built in LED flashlight.
2 Description: Deliver up to 24 cartridges per charge. Includes: 2pcs 20V 2,5Ah Lithium-Ion batteries, 0,9 m hose, 220V charger, carrying case, LCD display showing: grease meter, remaining grease, battery level, clogged fitting. Built in LED flashlight.

TYPE
Batteries
PART NO.
1 343291 4 2553401 2 343521 5 2553201 3 343432
DATA
1 Capacity: 2,5 Ah Voltage: 20 V DC Fits: 596-C1/D1, 597-C/D
2 Capacity: 4,0 Ah Voltage: 20 V DC Fits: 596-C1/D1, 597-C/D
3 Capacity: 2,0 Ah Voltage: 14,4 V DC Fits: 586-C
4 Capacity: 4 Ah Voltage: 20 V AC Fits: 25534
5 Capacity: 2 Ah Voltage: 20 V DC Fits: 25532

TYPE
Battery chargers
PART NO.
1 343501 2 343289 3 2553402
DATA
1 Fits: 586-C, 596-C/D C1/D1, 597-C/D
2 Fits: 586-C, 596-C/D C1/D1, 597-C/D
3 Fits: 25532, 25534

TYPE
Pressure relief kit
PART NO.
26745
DATA
Description: Useful during high pressure greasing, causing the coupler to become difficult to remove from the grease fitting when done. Using the pressure relief kit enables a user to release the pressure before removing the coupler. Includes: 450mm outlet hose, hydraulic coupler, relief valve.



TYPE
Grease control valve
PART NO.
1 26716
2 26716-01
3 26716-11
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Model: Grease gun with outlet tube
2 Model: Grease gun with flex hose (450mm)
3 Model: Grease gun with flex hose (450mm) and Z-swivel

TYPE
Meters for grease
PART NO.
1 26715
2 2168600
DATA
Capacity: >1000 gr/min
Maximum pressure: 50 (500) MPa (bar)
Accuracy: 3 % ±
1 Model: Digital grease meter with grease gun
Connection: 1/4" (F) BSP
2 Model: Digital grease inline meter. 1/8" (F) BSP 2500 gr/min 70 (700) MPa (bar)
Connection: 1/8" (F) BSP

TYPE
Air operated grease gun
PART NO.
25770
DATA
Description: For quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge.
Ratio: 60:1
Capacity: 1 gr/stroke
Maximum air pressure: 1,0 (10) MPa (bar)
Connection: 1/4" (F) BSP


TYPE
Grease spraying gun
PART NO.
25775
DATA
Description: For spraying grease directly from MLS / Lube-Shuttle screw type cartridges. The unit delivers a constant quantity as long as the trigger is pulled. Flat or round spray pattern can be adjusted. Includes quick connector that fits Cejn 320 or Tema 1600. Applications: Spraying grease onto chains, wire ropes, open gears, slide ways, telescopic booms, etc. For 400 gram screw-in cartridge.
Maximum air pressure: 0,5 (5) MPa (bar)
Connection: 1/4" (F) BSP

DRUM COVERS AND ACCESSORIES

DRUM COVERS AND ACCESSORIES



TYPE	TYPE	TYPE	TYPE
Drum covers	Drum cover accessories	Drum cover for H.D. pumps	Follower plates
PART NO.	PART NO.	PART NO.	PART NO.
1 26770 4 26773 2 26771 5 26774 3 26772	1 26752 2 2168920 3 26778	26775	1 26767 4 26763 2 26765 5 26762 3 26764 6 26760
DATA	DATA	DATA	DATA
1 For container: 12 kg Dimension: Ø 245-285 mm 2 For container: 20 kg Dimension: Ø 280-320 mm 3 For container: 50 kg Dimension: Ø 320-380 mm 4 For container: 50 kg Dimension: Ø 360-408 mm 5 For container: 180 kg Dimension: Ø 560-610 mm	1 Model: Carrying handle for 26770 2 Model: T-Screws for plastic buckets, 3 pcs 3 Model: Holder for grease gun	For container: 180 kg Dimension: Ø 560-610 mm	1 For container: 18 kg Dimension: Ø 230-260 mm 2 For container: 20 kg Dimension: Ø 260-290 mm 3 For container: 25 kg Dimension: Ø 300-330 mm 4 For container: 50 kg Dimension: Ø 330-370 mm 5 For container: 50 kg Dimension: Ø 360-390 mm 6 For container: 180 kg Dimension: Ø 550-590 mm

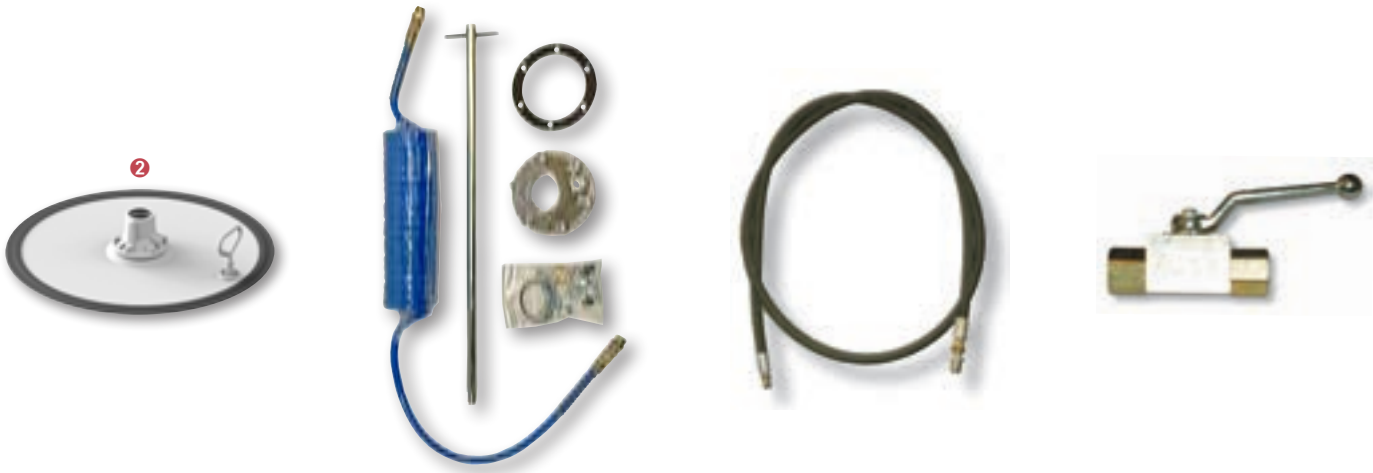

TYPE
Follower plates for H.D. pumps
PART NO.
1 26768
2 26769
DATA
1 For container: 50 kg
Dimension: Ø 360-405 mm
2 For container: 180 kg
Dimension: Ø 550-590 mm


TYPE
Follower plate adapter
PART NO.
28316
DATA
Description: Pump adapter for follower plates. Attaches to the follower plate to further maximise emptying of the grease drum. Fits all follower plates and the following pumps: 25745, 25746, 25730, 25731

TYPE
Grease hoses
PART NO.
1 26710
2 26711
3 26712
DATA
Connection: 1/4" - 3/8" (F)-(M) BSPT
1 Length: 2 m
2 Length: 4 m
3 Length: 6 m

TYPE
Shut-off valves
PART NO.
1 1367273
2 1367775
3 1367776
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 3/8" (F)-(F) BSP
3 Connection: 1/2" (F)-(F) BSP

DRUM COVERS AND ACCESSORIES

DRUM COVERS AND ACCESSORIES

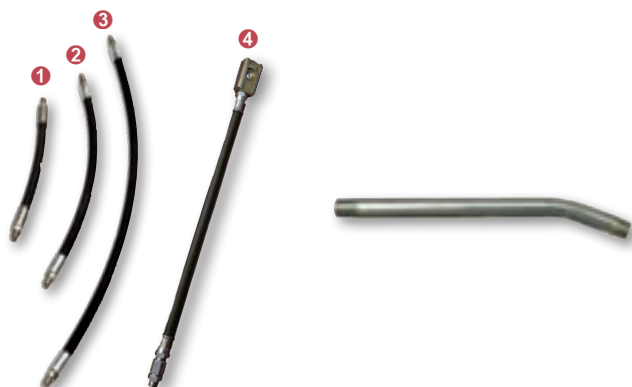


TYPE
Outlet hoses for grease guns
PART NO.
1 26731 2 26732 3 26733 4 26717
DATA
Maximum pressure: 50 (500) MPa (bar)
Connection: 1/8" (M)-(M) BSP
1 Model: Outlet hose 1/8" x 200 mm
Hose length: 200 mm
2 Model: Outlet hose 1/8" x 300 mm
Hose length: 300 mm
3 Model: Outlet hose grease 450 mm x 1/8"
Hose length: 450 mm
4 Model: Outlet hose 1/8" x 300 mm with 16 mm button head coupler
Hose length: 300 mm

TYPE
Outlet tube for grease guns
PART NO.
2060201
DATA
Dimension: Ø10 mm
Thread: 1/8" (M)-(M) BSPT
Length: 140 mm

TYPE
Grease swivels
PART NO.
1 26725 2 26727 3 26729 4 26726 5 26728
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Connection: 1/4" - 1/4" (F)-(M) BSP
2 Connection: 1/4" - 1/2"-27 (M) NPT
3 Connection: 1/8" - 1/2"-27 (M) NPTF
4 Connection: 1/4" (F)-(M) BSP
5 Connection: 1/8" (F)-(M) BSPT

TYPE
Grease connectors
PART NO.
1 26721 2 26723 3 26722 4 26730 5 26796
DATA
Dimension: Ø 15 mm
Connection: 1/8" (F) BSP
1 Model: Grease connector Ø15mm 4 jaws
2 Model: Grease connector G1/8" Ø15mm 4 jaws with built-in check valve
3 Model: Grease connector G1/8" Ø18 mm with 3 jaws.
4 Model: Button head nozzle 16 mm
5 Model: Grease connector G1/8" with relief valve

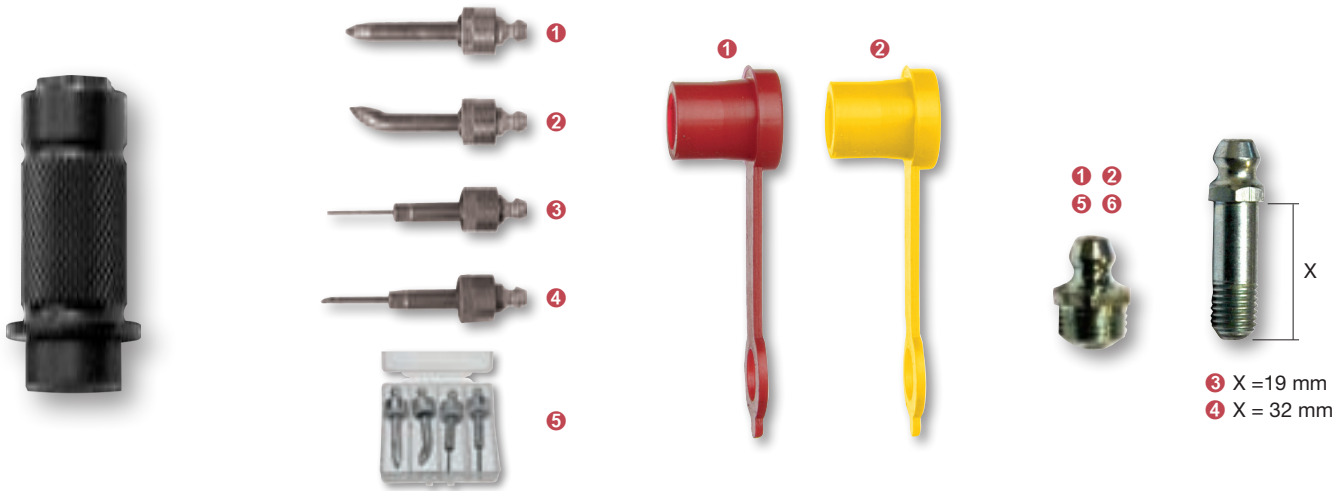

TYPE
Lock-on grease quick coupler
PART NO.
26739
DATA
Maximum pressure: 70 (700) MPa (bar)
Connection: 1/8" (F) NPT
Description: Revolutionary grease coupler. Smooth lock-on mechanism that eases grease fitting coupling and uncoupling. This is a durable, jaws-free coupler that includes seven retaining balls, assuring a proper sealing between grease fitting* and grease pump up to a pressure of 700 bar. Store display for countertop placement also available. Place for 10 couplers.
* DIN 71412

TYPE
Needle nozzles
PART NO.
1 2169182 4 2169185 2 2169183 5 26718 3 2169184
DATA
1 Model: Needle nozzle Ø 6 mm
2 Model: Needle nozzle Ø 6 mm 45°
3 Model: Needle nozzle Ø 1,4 mm
4 Model: Needle nozzle Ø 2,6 mm
5 Model: Needle nozzle kit of 4 different types

TYPE
Protective cover for grease fittings
PART NO.
1 43770 2 43771
DATA
1 Model: Protection cover (red) for grease fittings
2 Model: Protection cover (yellow) for grease fittings

TYPE
Straight, pipe thread. Zinc-plated steel.
PART NO.
1 1610-BL 4 1627-B 2 1634 5 1627-S 3 1607-B
DATA
1 Thread: 1/8" (M) NPTF
2 Thread: 1/8" (M) NPT
3 Thread: 1/8" (M) BSP
4 Thread: 1/4" (M) NPTF
5 Thread: 1/4"-28 SAE-LT



TYPE	
Straight, metric. Zinc-plated steel.	
PART NO.	
❶ 2106	❸ 2109
❷ 2110	❹ 2112
DATA	
❶ Thread: M6x1	
❷ Thread: M8X1	
❸ Thread: 10x1 mm	
❹ Thread: M8X1,25	

TYPE	
Angled 30-67°. Zinc-plated steel.	
PART NO.	
❶ 1629-B	
❷ 1688-B	
❸ 2107	
DATA	
❶ Type: 67°	
Thread: 1/4" (M) BSP	
❷ Type: 45°	
Thread: R 1/8"	
❸ Type: 45°	
Thread: M6x1	

TYPE	
Angled 90°. Zinc-plated steel.	
PART NO.	
❶ 1613-B	❹ 1606-B
❷ 2114	❺ 2105
❸ 2108	
DATA	
❶ Type: 90°	
Thread: 1/8" NPT	
❷ Type: 90°	
Thread: M8X1,25	
❸ Type: 90°	
Thread: M6x1	
❹ Type: 90°	
Thread: 1/8" (M) NPTF	
❺ Type: 90°	
Thread: M8X1	

TYPE	
Straight, pipe thread. Stainless steel	
PART NO.	
❶ 1961-S	
❷ 1966-S	
❸ 512-RF	
DATA	
❶ Type: Straight	
Thread: 1/8" (M) BSP	
Material: Stainless steel (AISI 303)	
❷ Type: Straight	
Thread: 1/4"x28SAE	
Material: Stainless steel (AISI 303)	
❸ Type: Straight	
Thread: G1/4"	
Material:	



TYPE
Extensions. Zinc-plated steel.
PART NO.
1 43762
2 43706
3 43718
DATA
1 Thread: 1/8" (F)-(M) NPTF
Length: 31 mm
2 Thread: 1/8" (F)-(M) NPTF
Length:
3 Thread: 1/8" -1/8" (F)-(M) BSP
Length: 32 mm

TYPE
Drive fittings. Zinc-plated steel.
PART NO.
501-A
DATA
Type: Straight
Connection: Ø8 mm

TYPE
15mm hex. Zinc-plated steel.
PART NO.
208-A
DATA
Thread: G1/8"

TYPE
16mm hex. Zinc-plated steel.
PART NO.
1 A-212
2 A-1184
3 A-210
DATA
1 Dimension: Ø16 mm
Thread: M10x1
2 Dimension: Ø16 mm
Thread: 1/8"NPTF
3 Dimension: Ø16 mm
Thread: 3/8" (M) NPTF



TYPE
22mm hex. Zinc-plated steel.
PART NO.
1 1823-1 2 1822-A1 3 1820-1
DATA
Type: Ø22 mm 1 Thread: 1/4" (M) NPTF 2 Thread: 3/8" (M) NPTF 3 Thread: 1/2" (M) NPTF

TYPE
Breather fittings. Zinc-plated steel.
PART NO.
1 300805 2 304810 3 131000
DATA
1 Thread: 1/8" (M) NPTF Maximum pressure: 0.0003 (0,003) MPa (bar) 2 Thread: 1/8" (M) NPTF Maximum pressure: 0.0008 (0,008) MPa (bar) 3 Thread: 1/8" (M) BSP Maximum pressure: 0.003 (0,03) MPa (bar)

TYPE
Relief fittings. Zinc-plated steel.
PART NO.
1 317400 2 323060
DATA
1 Thread: 1/8" (M) NPTF Maximum pressure: 0,002-0,007 (0,02-0,07) MPa (bar) 2 Thread: 1/8" (M) BSP Maximum pressure: 0,1-0,17 (1,0-1,7) MPa (bar)

TYPE
Grease fitting rejuvenator
PART NO.
339841
DATA
Description: Simply fill the tool with a light oil and with a few taps the joint will open. The grease fitting rejuvenator will allow a clogged grease fitting and /or joint to take on grease by injecting a light viscosity oil into the grease joint via the grease fitting, thus breaking up and removing any dirt, rust or debris. The purpose of this tool is to free up the joint and the fitting enabling them to be greased. Once the tool is installed onto the grease fitting, only a tapping of the piston is required to open a joint.



TYPE

Tool for broken fittings

PART NO.

- 1 B315790
- 2 B315791

DATA

- 1 **Description:**
All-In-One tool to extract broken fittings, re-thread holes and install new straight and angle-type fittings. With 1/4" BSP - 28"SAE, threads.
- 2 **Description:**
All-In-One tool to extract broken fittings, re-thread holes and install new straight and angle-type fittings. With 1/8" NPTF thread.

NOTES

Notes section with horizontal lines for writing.

Waste oil equipment

Waste oil pumps	90
Equipment for pits	91
Mobile waste oil drainers with bowl	93
Autovac - central vacuum system	98
Waste oil handling	99

WASTE OIL PUMPS

WASTE OIL PUMPS



TYPE
Waste oil pump 1:1
PART NO.
C11745
DATA
Capacity: 15 l/min free flow
Maximum air pressure: 0,7 (7) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Connection: 1/4" (F) BSP

TYPE
Waste oil pump 5:1
PART NO.
15832
DATA
Capacity: 38 l/min free flow
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Connection: 1/4" (F) BSP

TYPE
Kit for draining directly from vehicles
PART NO.
317-49
DATA
Description: Complete kit to drain waste oil using probes. The kit includes the following: hose reel CC15 6m x 5/8", suction pump C11745, wall bracket, quick coupling with suction probes, suction strainer with vacuum gauge and air quick coupling. Capacity when using Ø 8 mm suction probe: 2 l/min (engine oil +60 °C).

TYPE
Evacuation pump for mobile drainers
PART NO.
1 317-44 2 317-44SP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump B11741, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m suction hose c.w. quick coupler, suction filter.
Pump: B11741 (1:1)
2 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump 15831, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m Suction hose c.w. quick coupler, suction filter.
Pump: 15831 (5:1)




TYPE
Diaphragm pump metal 54 l/min
PART NO.
11782
DATA
Ratio: 1:1 Capacity: 54 l/min free flow Air connection: 1/4" (F) NPSM Inlet: 1/2" (F) BSP Outlet: 1/2" (F) BSP Max particle size: 2,5 (3/32") mm (inch) Material pump body: Aluminium

TYPE
Diaphragm pump metal 130 l/min
PART NO.
11783
DATA
Ratio: 1:1 Capacity: 130 l/min free flow Air connection: 3/8" (F) NPT Inlet: 1" (F) BSP Outlet: 1" (F) BSP Max particle size: 3,2 (1/8) mm (inch) Material pump body: Aluminium

TYPE
Variable waste oil arm for pits
PART NO.
1 317-60 2 317-65
DATA
Maximum air pressure: 0,7 (7) MPa (bar) Pump: 15831 Volume: 45 l Hose length: 2 m Filtration: 600 µm 1 Description: Ideal solution for quick and efficient waste oil draining in pits. The waste oil is pumped directly to the tank from the collection bowl which is mounted on a rail and can be used along the entire length of the pit. Controls for pump speed and arm up/down are mounted on the arm. Media: Waste oil 2 Description: Ideal solution for quick and efficient antifreeze draining in pits. The used antifreeze is pumped directly to the tank from the collection bowl which is mounted on a rail and can be used along the entire length of the pit. Controls for pump speed and arm up/down are mounted on the arm. Media: Glycol

TYPE
Rail kit for 317-60, -65
PART NO.
1 317-61 2 317-66
DATA
1 Description: Includes: 4m rail, 2 brackets, 1 joining piece. 2 Description: Fasteners and bracket for mounting rails in prefabricated pits.

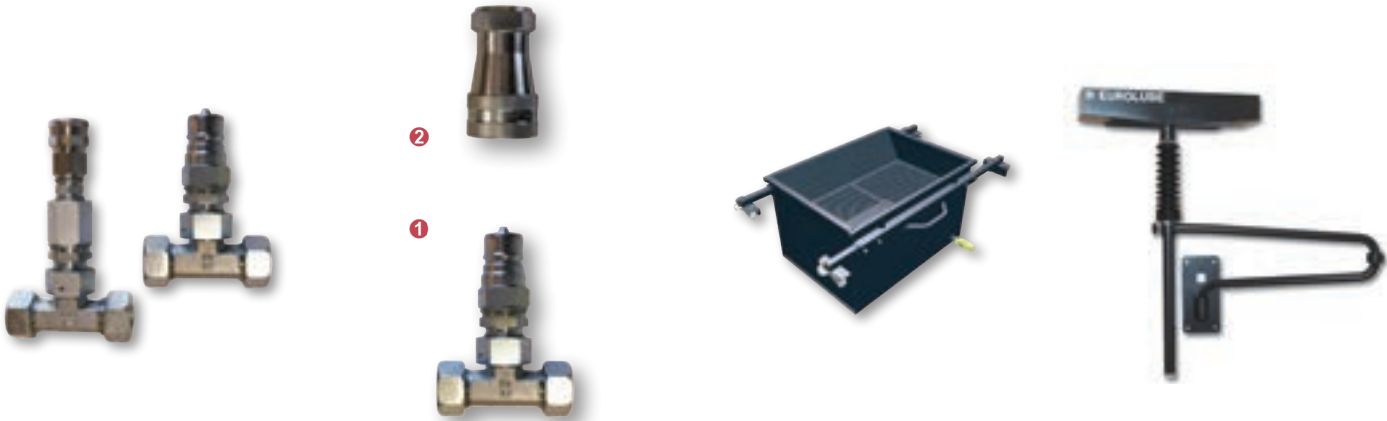

TYPE
Connection kit air & oil for 317-60
PART NO.
317-62
DATA
Description: Includes: T-joint Ø22 with air coupler, T-joint Ø22 with oil coupler.

TYPE
Connection kit glycol for 317-65
PART NO.
1 317-63 2 3315098
DATA
1 Model: Connection kit anti freeze for 317-65 for Ø22mm tube incl air coupler 2 Model: Coupler anti freeze 3/4" for 317-65

TYPE
Waste oil collector 95 l
PART NO.
0949-160
DATA
Description: A sturdy waste oil collector for pits. The emptying of the drainers is done with discharge pump part no 317-44 or 317-47. 95L Tank with adjustable arms, 1030-1450mm. Do not use with flammable or corrosive fluids. Volume: 95 l

TYPE
Waste oil collector for pits
PART NO.
DATA



TYPE
Discharge pump kit for pits
PART NO.
317-41
DATA
Description: Evacuation pump kit for waste oil collector 16795. High capacity, pumps up to 4mm particles in the fluid. Do not use with flammable or corrosive fluids. Max air pressure: 0,7 MPa (150 psi). Includes: ED100 Pump, filter regulator, air line hose, outlet hose, suction hose, 25 l tank with float switch.

TYPE
25 l oil drainer
PART NO.
318-45
DATA
Description: Ideal use with boats, movers, tractors, cars etc. Includes: vacuum pump, 2 m suction hose, probe kit

TYPE
65 l drainer w/o bowl
PART NO.
318-62
DATA
Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 8 probes.

TYPE
Standard 65 l drainer
PART NO.
❶ 318-65 ❷ 318-66
DATA
❶ Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl.
❷ Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, quick coupler.



TYPE Combi 65 I drainer	TYPE Deluxe 65 I drainer	TYPE Special 65 I drainer for mo- torbikes	TYPE Special 65 I drainer with fold down bowl
PART NO. 1 318-64 2 318-67	PART NO. 1 318-63 2 318-68	PART NO. 318-51	PART NO. 318-55
DATA 1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and perfor- mance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 8 probes. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and perfor- mance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes Safety and breathing valve, quick coupler.	DATA 1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and perfor- mance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes, safety and brea- thing valve, 10 l inspection tank. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and perfor- mance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes, Safety and breathing valve, 10 l inspection tank, quick coupler.	DATA Description: Waste oil unit with a low bowl. The unit can be discharged by gravity or air pressure.	DATA Description: This unit can be used both under lifts and when the vehicle is on the ground. It is suitable for use with all non-corrosive liquids and is equipped with a level gauge. The container is emptied using com- pressed air and a tyre pressure gauge. A safety valve ensures that the pressure in the container does not exceed 0.5 bar.

MOBILE WASTE OIL DRAINERS WITH BOWL

MOBILE WASTE OIL DRAINERS WITH BOWL



TYPE
Pump discharge kit
PART NO.
1 317-44 2 317-44SP
DATA
Maximum air pressure: 1,0 (10) MPa (bar) 1 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump B11741, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m suction hose c.w. quick coupler, suction filter. Pump: B11741 (1:1) 2 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump 15831, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m Suction hose c.w. quick coupler, suction filter. Pump: 15831 (5:1)

TYPE
Standard 100 l drainer
PART NO.
1 318-80 2 318-85
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, quick coupler. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve.

TYPE
Combi 100 l drainer
PART NO.
1 318-81 2 318-86
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, vacuum pump, probe kit with 5 probes, safety and breathing valve, quick coupler. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 5 probes.

TYPE
Deluxe 100 l drainer
PART NO.
1 318-82 2 318-87
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, vacuum pump, probe kit with 5 probes, safety and breathing valve, 10 l Inspection tank, quick coupler. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, vacuum pump, Probe kit with 5 probes, safety and breathing valve. 10 l Inspection tank.



TYPE
Accessories
PART NO.
1 318-30 2 16791
DATA
1 Description: A handy waste oil bowl for 200 l drum. Include: 2" BSP drum connection. Do not use with flammable or corrosive fluids.
2 Description: Filter pad for mobile drainers to filter out large particles and prevent splashback.

TYPE
Eurovac
PART NO.
11780
DATA
Description: Eurovac saves the environment, time and money. Install directly onto a standard drum. Applications: Extract floor spillage such as oil, anti freeze, water e.g. Empty and clean kegs, drums and tanks e.g.
Capacity: 70 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 0,6 (6) MPa (bar)
Air consumption: 300-1000 l/min free flow
Vacuum level: -4000 mm
Noise level: 80 dB

TYPE
Suction probes and handle
PART NO.
1 3188587 2 3188595 3 3188596
DATA
1 Description: Complete kit of probes to be used with our waste oil pumps and waste oil drainers. Includes: Mercedes adapter, VAG adapter, PSA & BMW adapter, Two flexible probes Ø6x4mm, Ø8x6mm, L=700mm, Two rigid probes Ø5x4mm, Ø6x5mm, L=700mm, One flexible probe Ø8x6mm, L=1000mm
2 Description: Suction handle with connector for suction probes.
3 Description: Extra long probe to be used with our waste oil pumps and waste oil drainers. Length 1300mm, diameter 8mm.

TYPE
Drain pan
PART NO.
1 16790 2 16793 3 16794
DATA
1 Model: Drain bowl 14 litre
Volume: 14 l
2 Model: 8L Drain pan with lid and spout
Volume: 8 l
3 Model: Wash/ Waste oil bowl in polyethylene. 8 l
Volume: 8 l




TYPE
Accessories
PART NO.
3188588
DATA
Description: Conversion kit for discharge by pump kit 317-44, fits all models in 318-series

TYPE
Quick coupler QR ISO-A
PART NO.
❶ 1367769 ❷ 1367770
DATA
❶ Description: Fits waste oil/coolant arm 317-60/65, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and fits to quick connector kit 3188588, delivered before 2024-02-14 Thread: 3/4" (F) BSP ❷ Description: Fits waste oil/coolant arm 317-60/65, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and included in kit 3188588, delivered before 2024-02-14 Thread: 3/4" (F) BSP

TYPE
Quick coupler TEMA profile
PART NO.
❶ 1367771 ❷ 1367772
DATA
❶ Description: Fits waste oil arm 317-60, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and quick connector kit 3188588, delivered after 2024-02-14 Thread: 3/4" (F) BSP ❷ Description: Passar spilloljearm 317-60, spilloljevagnar 318-xx, tömningspump 317-44, 317-44SP samt ingår i snabbkopplingssats 3188588, levererade efter 2024-02-14. Thread: 3/4" (F) BSP

TYPE
Low profile drainer 95 l
PART NO.
0951-200
DATA
Description: For easy draining of waste oil directly from the vehicle without using a lift. The drainer is emptied either directly through a valve or with a discharge pump if a quick coupling kit is fitted. Dimension: 1250X610X260 mm Volume: ~95 l

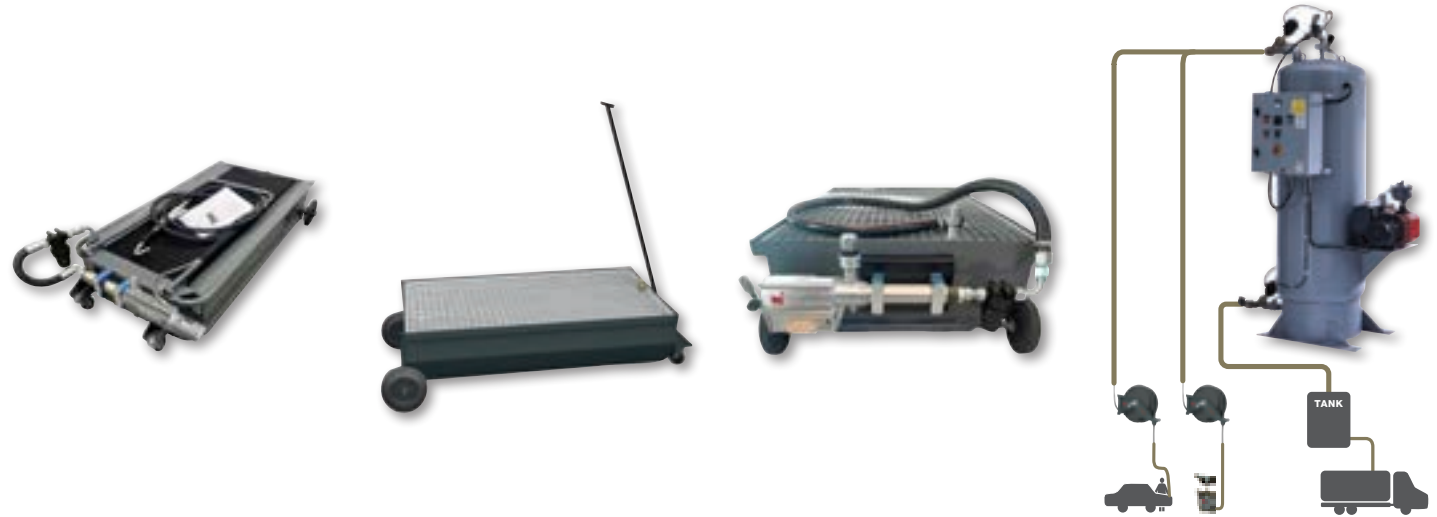

TYPE
Low profile drainer with pump 95 l
PART NO.
0951-500
DATA
Description: Robust waste oil drainer for collecting oils from all types of vehicles. Built-in discharge pump, outlet hose, quick couplers and filter. Do not use in flammable or corrosive liquids.
Dimension: 1540X760X350 mm
Pump: C11745
Volume: 95 l
Hose length: 3 m


TYPE
Low profile drainer 200 l
PART NO.
0951-700
DATA
Description: For easy draining of waste oil directly from the vehicle without using a lift. The drainer is emptied either directly through a valve or with a discharge pump if a quick coupling kit is fitted. Suction connection G3/4" (m)
Dimension: 1450X820X360 mm
Volume: 200 l

TYPE
Low profile drainer with pump and strainer 200 l
PART NO.
0951-900
DATA
Description: Robust waste oil drainer for collecting oils from all types of vehicles. Built-in discharge pump, outlet hose, quick couplers and filter. Do not use flammable or corrosive liquids.
Dimension: 1450X820X360 mm
Pump: 15832
Volume: 200 l
Hose length: 2 m

TYPE
Autovac main unit
PART NO.
317-54
DATA
Description: Autovac is an eco-friendly waste oil evacuation method. It employs a fixed setup with a hose reel and probe or quick coupler to extract waste oil directly from the engine into a storage tank. It eliminates direct contact with waste oil and the need for mobile units. The system ensures clean and safe suction with its automatic High Vacuum system, preventing spillage. Installation is simple. Caution: Do not use with flammable or corrosive fluids. Key features include automatic drainage of the built-in tank, accommodating up to 7 workstations simultaneously, and a vacuum switch controlling the pump's operation as needed.
Capacity: 750 W
Maximum air pressure: 0,6 (6,0) MPa (bar)
Voltage: 380 V AC
Vacuum level: 99 %
Tank volyme: 500 l
Noise level: 62 dB



TYPE	TYPE	TYPE	TYPE
Hose reel for waste oil	S10-Series	CC15-Series	Suction strainer
PART NO.	PART NO.	PART NO.	PART NO.
317-48	317-52	317-53	16797
DATA	DATA	DATA	DATA
Description: Suction reel for use in Autovac system. Includes: Handle with transparent hose. Probe kit. S10 Hose Reel with 10mx1/2" hose (17820). Warning! Do not use with flammable or corrosive fluids.	Description: Suction reel for use in Autovac system. Delivered with a nozzle for quick connection/change of the probes.	Description: Suction reel for use in Autovac system. Delivered with a nozzle for quick connection/change of the probes.	Maximum working pressure: 2,0 (20) MPa (bar)
Dimension: 12,5 (1/2") mm (inch)	Dimension: 16 (5/8") mm (inch)	Dimension: 16 (5/8") mm (inch)	Maximum temperature: 80 °C
Hose length: 10 m	Hose length: 6 m	Hose length: 6 m	Filtration: 600 µm
Connection: 1/2" (F)-(F) BSP	Connection: 1/2" (F)-(M) BSP	Connection: 1/2" (F)-(M) BSP	Connection: 1 1/4" (F)-(F) BSP

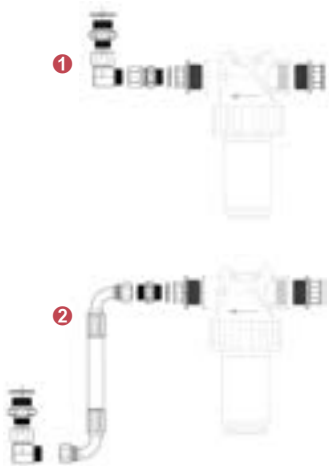

TYPE	
Connection kit for strainer	
PART NO.	
① 3188771	
② 3188772	
DATA	
① Model:	Connection kit for strainer, direct connection to pump foot valve
② Model:	Connection kit for strainer, hose connection to pump

TYPE
Vacuum gauge for strainer
PART NO.
3188579
DATA
Description: When attaching a vacuum gauge to the suction strainer a Ø 3 mm hole must be drilled in the bottom of the 1/4 BSP port.
Connection: 1/4" (M) BSP

Multi-fluid equipment

Air operated multi-fluid pumps	102
Wind screen fl / degreaser	106
Meters and control valves	108
Hand operated equipment	110
Measures, funnels and accessories	111

AIR OPERATED MULTI-FLUID PUMPS

AIR OPERATED MULTI-FLUID PUMPS



C50-Series



C50-Series



TYPE
AF1 Transfer pump
PART NO.
1 1050-200 2 1050-300
DATA
1 Ratio: 1:1 Capacity: 15 l/min free flow Air connection: 6,35 (1/4") Ø mm (inch) Maximum air pressure: 0,7 (7) MPa (bar) Riser tube length: 400-915 mm Seals: Viton 2 Ratio: 1:1 Capacity: 15 l/min free flow Air connection: 1/4" (F) BSP Maximum air pressure: 0,7 (7) MPa (bar) Riser tube length: 400-915 mm Seals: EPDM

TYPE
Hose kit for AF1
PART NO.
1050-900
DATA
Description: Complete hose kit with ball valve. Fits all model of AF1-Pumps. Length: 2 m

TYPE
1:1 Stainless steel pump
PART NO.
11716
DATA
Ratio: 1:1 Capacity: 30 l/min free flow Air connection: 1/4" (F) BSP Maximum air pressure: 1 (10) MPa (bar) Inlet: 1" (F) BSP Outlet: 3/4" (M) BSP Pump tube: Ø50 L=235 mm Seals: Viton, PTFE

TYPE
1:1 Stainless steel pump
PART NO.
11717
DATA
Ratio: 1:1 Capacity: 30 l/min free flow Air connection: 1/4" (F) BSP Maximum air pressure: 1 (10) MPa (bar) Inlet: - Outlet: 3/4" (M) BSP Pump tube: Ø50 L=915 mm Seals: Viton, PTFE

AIR OPERATED MULTI-FLUID PUMPS

AIR OPERATED MULTI-FLUID PUMPS

E80-Series



E80-Series



E80-Series



E80-Series



TYPE
4:1 Stainless steel pump
PART NO.
12740
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø54 L=220 mm
Seals: PTFE / Teflon®

TYPE
4:1 Stainless steel pump
PART NO.
12745
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø25, 54 L=670+220 mm
Seals: PTFE / Teflon®

TYPE
4:1 Stainless steel ATEX pump
PART NO.
12741
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø54 L=220 mm
Seals: PTFE / Teflon®
Certification: ATEX

TYPE
4:1 Stainless steel ATEX pump
PART NO.
12746
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø25, 54 L=670+220 mm
Seals: PTFE / Teflon®
Certification: ATEX

AIR OPERATED MULTI-FLUID PUMPS

AIR OPERATED MULTI-FLUID PUMPS



TYPE
1:1 Nickel plated pump
PART NO.
B11741-10
DATA
Ratio: 1:1
Capacity: 40 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Material pump body: Nickel-plated steel

TYPE
Pump kit for drum
PART NO.
1 117-10 2 117-11
DATA
Maximum air pressure: 1 (10) MPa (bar)
1 Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: 1/4" Filter regulator, 1,5m Air line hose, 1,5m Outlet hose, 3/4" Ball valve.
Pump: 11717
2 Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: 2,5 m Suction hose, 1/4" Filter regulator, 1,5m Air line hose, 1,5m Outlet hose, 3/4" Ball valve.
Pump: 11716

TYPE
Spray pump kit for drum
PART NO.
117-12
DATA
Maximum air pressure: 1 (10) MPa (bar)
Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: Needle valve, 10m chemical hose, Spray gun.
Pump: 11717

TYPE
Mixing pump 1:1
PART NO.
117-21
DATA
Description: Mix Pump designed on our unique stainless steel pump. Mixing ratio 50/50%. Compatible with anti-freeze. High capacity and perfect mixture. Ideal in piped systems. Consistent flow.
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Inlet: 3/4" (F) BSP
Outlet: 1/2" (F) BSP
Maximum pressure: 0,8 (8) MPa (bar)
Hose length: 2500 mm

AIR OPERATED MULTI-FLUID PUMPS

AIR OPERATED MULTI-FLUID PUMPS



TYPE Ejector mixing unit	TYPE Pump kit for used water	TYPE Ejector mixer for windshield washer fluid, degreaser, etc.	TYPE Diaphragm pump plastic 50 l/min
PART NO. 1 117-15 2 117-14	PART NO. 317-50	PART NO. 36781	PART NO. 1 11786 2 11787
DATA 1 Description: Water operated mixing unit with ejector for windshield fluids, adjustable with nozzles between 20% to 50% mix. The wall mounted unit has a suction attachment for connection to the concentrate container. Includes: Water operated mixing unit, Mixing tank, Suction tube L = 0,9m x Ø25mm. • Pump NOT included, see connection kit 117-14 and pump 11716. 2 Description: Contains inlet and outlet hoses, air connection parts	DATA Description: Equipment for water draining from eg floor scrubbers, tyre washers or industrial cleaning machines, directly from the machine to a 1,000 IBC container. Consists of an air-operated diaphragm pump, suction hose L = 5m with foot valve, air pressure regulator and bracket for IBC containers.	DATA Description: Proportioner that automatically mix liquid cleaning and sanitizing concentrates with water and dispense the diluted solution into any container. The unit is threaded directly onto the container of concentrate or by means of an adaptor. Comes with 13 different nozzles for a dilution range of approx 1:1-100:1 (water : concentrate).	DATA Ratio: 1:1 Air connection: 1/4" (F) NPSM Material pump body: Polypropylene 1 Capacity: 31 l/min free flow Inlet: 3/8" (F) BSP Outlet: 3/8" (F) BSP Max particle size: 1,6 (1/16") mm (inch) 2 Capacity: 54 l/min free flow Inlet: 1/2" (F) BSP Outlet: 1/2" (F) BSP Max particle size: 2,5 (3/32") mm (inch)



C15-Series



TYPE
Diaphragm pump metal 54 l/min
PART NO.
11788
DATA
Ratio: 1:1
Capacity: 54 l/min free flow
Air connection: 1/4" (F) NPSM
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)
Material pump body: Stainless steel

TYPE
Without hose
PART NO.
37869
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 1,5 (15) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
With hose
PART NO.
1 37838 3 37854 2 37836 4 37848
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP
3 Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
4 Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with control valve
PART NO.
1 387-05 2 387-03 3 387-07
DATA
Maximum working pressure: 1,5 (15) MPa (bar)
1 Description: Includes: hose reel S10 10m (37838), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m
2 Description: Includes: hose reel S15 15m (37836), 1/2" ball valve with filter, control valve (10215)
Hose length: 15 m
3 Description: Includes: hose reel C15 10m (37854), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m



CC15-Series



CC15-Series



CC15-Series



TYPE
Reel kit with meter
PART NO.
1 387-06 2 387-04 3 387-08
DATA
Maximum working pressure: 1,5 (15) MPa (bar)
1 Description: Includes: hose reel S10 10m (37838), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m
2 Description: Includes: hose reel S15 15m (37836), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 15 m
3 Description: Includes: hose reel C15 10m (37854), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m

TYPE
With hose
PART NO.
37872
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
With hose
PART NO.
37873
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with control gun
PART NO.
1 386-05 2 386-03
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (37872), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m
2 Description: Includes: hose reel CC15 15m (37873), 1/2" ball valve with filter, control valve (10215)
Hose length: 15 m

CC15-Series



TYPE
Reel kit with meter
PART NO.
1 386-06
2 386-04
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (37872), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m
2 Description: Includes: hose reel CC15 15m (37873), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 15 m

TYPE
Multi-fluid digital meter
PART NO.
30210
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 3,0 (30) MPa (bar)
Seals: FKM / Viton®
Connection: 1/2" (F) BSP

TYPE
In-line meters for chemicals
PART NO.
1 1168819
2 1168818
DATA
Capacity: 1-50 l/min free flow
Connection: 1/2" (F)-(F) BSP
1 Maximum pressure: 3 (30) MPa (bar)
Material: PVC
2 Maximum pressure: 10 (100) MPa (bar)
Material: Stainless steel

TYPE
Dispensing valve for fluids
PART NO.
1 10215
2 10255
3 10277
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 5,0 (50) MPa (bar)
Seals: FKM / Viton®
Connection: 1/2" (F) BSP
1 Media: Windscreen fluid/AdBlue®/Fluids
2 Media: Glycol
3 Media: Glycol

METERS AND CONTROL VALVES

METERS AND CONTROL VALVES



TYPE
Spray gun
PART NO.
36731
DATA
Outlet: 500 mm
Maximum pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Spray guns
PART NO.
36732
DATA
Outlet: 1000 mm
Maximum pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Water control valve
PART NO.
1 36722 2 3672261 3 3672264
DATA
Maximum pressure: 3,0 (30) MPa (bar)
1 Description: For water and antifreeze.
Connection: 1/4" (F) BSP
2 Description: For water and antifreeze. With adapter.
Connection: 1/2" (F) BSP
3 Description: For water and antifreeze. With adapter.
Connection: 3/8" (F) BSP

TYPE
Wash guns for water
PART NO.
1 36723 2 36724 3 36733
DATA
1 Maximum pressure: 2,0 (20) MPa (bar)
Connection: 12,5/19 - 3/4" ØMM-(M) BSP
2 Maximum pressure: 3 (30) MPa (bar)
Connection: 1/2" (F) BSP
3 Maximum pressure: 2,4 (24) MPa (bar)
Connection: 1/2" (F) BSP



TYPE
Mobile sprayer 24 l
PART NO.
137-50
DATA
Description: Comprising of a 24 litres steel container, fitted with a compressed air connection and pressure gauge, Ø30 mm (1 1/4") filler hole, sight gauge and two Ø100 mm (4") wheels. Pre-load the container with compressed air 0,3-0,7 MPa (3-7 bar). The dispenser can be used without permanent connection to air pressure. Max. admissible tank capacity is 3/4 of total capacity. Complete with 1,2 m hose and spray handle. Note: Suitable for petroleum based detergents only!
Dimension: 350 x 380 x 780 mm
Volume: ~24 l

TYPE
950 Lever pumps 60-208 l
PART NO.
1 0950-200 4 0950-200- 2 0950-300 GREY 3 0950-200-BL
DATA
Capacity: 0,33 l/stroke
Riser tube length: 575 - 965 mm
Material: Polypropylene
1 Seals: Viton
2 Seals: EPDM
3 Seals: Viton
4 Seals: Viton

TYPE
Multi fluid hand pumps
PART NO.
1 30740 4 30735 2 30741 5 30730 3 10721
DATA
Seals: PTFE / Teflon®
1 For container: 20-25 l
Material: Polypropylene
2 For container: 50-60 l
Material: Polypropylene
3 For container: 180-200 l
Material: Polypropylene
4 For container: 20-200 l
Material: Stainless steel (AISI 316)
5 For container: 20-208 l
Material: PVC

TYPE
Drum pump 60-208 l
PART NO.
1 11646 2 11647
DATA
Capacity: 0,5 l/stroke
Riser tube length: 350-980 mm
Material: Polypropylene
1 Seals: Viton®
2 Seals: EPDM

HAND OPERATED EQUIPMENT

MEASURES, FUNNELS AND ACCESSORIES



TYPE
Glycol drainer
PART NO.
0951-500W
DATA
Description: Low trolley for efficient collection of glycol, which can easily be pumped back to the cooling system after service. Do not use with flammable liquids.
Pump: B11741-10
Volume: 95 l

TYPE
Syphon pumps
PART NO.
1 30750 2 30752
DATA
1 Capacity: ~6,5 l/min free flow
For container: 25 l
Riser tube length: 390 mm
2 Capacity: ~18,5 l/min free flow
For container: 208 l
Riser tube length: 850 mm

TYPE
Measure with spout
PART NO.
1 16770 3 16772 2 16771 4 16773
DATA
1 Volume: 1,0 l
2 Volume: 2,0 l
3 Volume: 3,0 l
4 Volume: 5,0 l

TYPE
Graded measures
PART NO.
1 16776 3 16778 2 16777 4 16779
DATA
1 Volume: 1,0 l
2 Volume: 2,0 l
3 Volume: 3,0 l
4 Volume: 5,0 l



TYPE
Plastic funnels
PART NO.
1 16760 3 16763 2 16761 4 16756
DATA
1 Model: Off-set funnel 160mm 2 Model: Funnel 190 mm with flexible spout 3 Model: Rectangular funnel 4 Model: Funnel kit Ø65, 75, 100 & 120 mm

TYPE
Drain pan
PART NO.
16790
DATA
Model: Drain bowl 14 litre Volume: 14 l

TYPE
Cans
PART NO.
1 16783 2 16784
DATA
1 Volume: 6 l 2 Volume: 11 l

TYPE
Drum adapters various containers
PART NO.
1 NW50-EUR 3 0925-026 2 0925-400 4 3218023
DATA
1 Model: Bung adapter NW50 2 Model: Bung adaptor Mauser G2"(f) 3 Model: Bung adaptor Trisure G2"(f) 4 Model: Adapter DIN 61 suits the most IBC containers - Hose tail 25 mm (1")



TYPE

Drum adapters various containers

PART NO.

- 1 3218125
- 2 3218025

DATA

1 Model:
Lid for IBC Ø160 mm - G2" (f)

2 Model:
Bung adaptor DIN 61 - 3/4" (f)

NOTES

Notes section with horizontal lines for writing.

NOTES

AdBlue® equipment

Pumps and kits	116
Hose reels for AdBlue®	119
Nozzles and meters	120
Filling tanks	122



TYPE
Refilling kit
PART NO.
1 387-50
2 387-51
3 387-52
DATA
1 Description: Fits 208 l drums / 1000l IBC containers. Telescopic pump tube 400-1300 mm, with 2" and 60x6 connection. Includes: Diaphragm pump, Suction hose with quick coupler, 3 m outlet hose, Std nozzle 30215.
2 Description: Fits 208 l drums / 1000l IBC containers. Telescopic pump tube 400-1300 mm, with 2" and 60x6 connection. Includes: Diaphragm Pump, Suction hose with quick coupler, 3 m outlet hose, Std nozzle 30210
3 Description: Fits 208 l drums / 1000l IBC containers. Telescopic pump tube 400-1300 mm, with 2" and 60x6 connection. Includes: Diaphragm Pump, Suction hose with quick coupler, 3 m outlet hose, Digital Meter with overfilling indication 30211.

TYPE
Refilling kit
PART NO.
1 387-54
2 387-53
DATA
1 Description: Includes: Diaphragm Pump, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Automatic nozzle, Heavy duty trolley. Can be equipped with hose reel for air to the pump, increasing the operating range.
2 Description: Includes: 230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Automatic nozzle, Heavy duty trolley, Can be equipped with cable reel for the pump, increasing the operating range.

TYPE
Kit for drum/IBC with digital meter
PART NO.
1 387-45
2 387-46
DATA
1 Description: Includes: 230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Manual nozzle, IBC/Drum bracket
2 Description: Includes: 230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Automatic nozzle, IBC/Drum bracket

TYPE
Electric pump kit
PART NO.
1 387-40
2 387-41
3 387-42
DATA
1 Description: Includes: 230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle
2 Description: Includes: 12V Electric pump 60212, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle
3 Description: Includes: 24V Electric pump 60224, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle



TYPE
Electric transfer pump 230 V AC
PART NO.
60240
DATA
Description: Centrifugal pump that have been designed and manufactured for transfer AdBlue from drums and tanks. Our pump is delivered with a complete kit of accessories. Inlet G2", Outlet Ø 25 mm, 2.5m outlet hose with valve
Capacity: 40 l/min free flow
Voltage: 230 V AC
Hose length: 2,5 m
Cable length: 2 m

TYPE
Electric transfer pump 24 V DC
PART NO.
60242
DATA
Description: Centrifugal pump that have been designed and manufactured for transfer AdBlue from drums and tanks. Our pump is delivered with a complete kit of accessories. Inlet G2", Outlet Ø 25 mm, 2.5m outlet hose with valve
Capacity: 35 l/min free flow
Voltage: 24 V DC
Hose length: 2,5 m
Cable length: 2 m

TYPE
Evacuation kit
PART NO.
387-30
DATA
Description: The unit can be used to temporarily extract the AdBlue® from a vehicle, then pump the same fluid back into the vehicle. Includes: Diaphragm Pump, Suction hose with strainer, 3 m outlet hose, control valve 10215, 200l HDPE Plastic drum, Drum trolley

TYPE
Electric pumps
PART NO.
❶ 60230 ❷ 60212 ❸ 60224
DATA
IP: 55
Connection: 1" (M)-(M) BSP
❶ Capacity: 30 l/min free flow
Motor: 400 W
Voltage: 230 V AC
❷ Capacity: 32 l/min free flow
Motor: 260 W
Voltage: 12 V DC
❸ Capacity: 32 l/min free flow
Motor: 310 W
Voltage: 24 V DC



TYPE
Lever pumps
PART NO.
0950-400
DATA
Description: Sturdy hand pump to handle AdBlue®. Fits directly onto the drum 2" drum adapter included, some drum may require Mauser or Trisure adapter, must be ordered separately. In use of IBC container require a tube extension. Warning, never expose the pump to any kind of back pressure (for example a pipe system), this will cause the pump to break down
Capacity: 0,3 l/stroke
Hose length: 2 m
Riser tube length: 400-915 mm

TYPE
Air operated pumps
PART NO.
1 1050-400
2 1050-405
DATA
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 0,7 (7) MPa (bar)
Hose length: 2,5 m
Riser tube length: 400-910 mm
1 Meter: -
2 Meter: 1169096

TYPE
Diaphragm pump plastic 31-54 l/min
PART NO.
1 11786
2 11787
DATA
Ratio: 1:1
Air connection: 1/4" (F) NPSM
Material pump body: Polypropylene
1 Capacity: 31 l/min free flow
Inlet: 3/8" (F) BSP
Outlet: 3/8" (F) BSP
Max particle size: 1,6 (1/16") mm (inch)
2 Capacity: 54 l/min free flow
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)

TYPE
Diaphragm pump metal 54 l/min
PART NO.
11788
DATA
Ratio: 1:1
Capacity: 54 l/min free flow
Air connection: 1/4" (F) NPSM
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)
Material pump body: Stainless steel

S10-Series



S15-Series



S10-Series



CC15-Series



TYPE
S10-Series
PART NO.
37818
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 2,0 (20) MPa (bar) Hose length: 10 m Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
S15-Series
PART NO.
37819
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 2,0 (20) MPa (bar) Hose length: 15 m Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with nozzle
PART NO.
387-15
DATA
Description: Includes: Hose reel S10 10m (37818), control valve (3369175). Hose length: 10 m

TYPE
CC15-Series
PART NO.
1 37886 2 37887
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 2,0 (20) MPa (bar) Connection: 1/2" - 1/2" (M)-(M) BSP 1 Hose length: 10 m 2 Hose length: 15 m

T20-Series



TYPE
T20-Series
PART NO.
37847
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 3/4" - 3/4" (M)-(M) BSP

TYPE
Digital meter for light vehicles
PART NO.
30211
DATA
Description: Control valve with swivel and meter (1168819), powered by 2 replaceable AAA 1,5 V alkaline batteries. Lockable in closed and filling position. Built in sensor indicates when the vessel is full.
Capacity: 30 l/min free flow
Maximum working pressure: 3,0 (30) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Manual nozzle for light vehicles
PART NO.
30215
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Automatic nozzle for light vehicles
PART NO.
3369179
DATA
Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing.
Capacity: 10 l/min free flow
Outlet: ISO 22241-5
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (M) BSP



TYPE	TYPE	TYPE	TYPE
Manual nozzle for heavy vehicles	Automatic nozzle for heavy vehicles	Automatic nozzle for heavy vehicles with magnet device	Digital meter
PART NO.	PART NO.	PART NO.	PART NO.
1 3369175 2 3369174	1 3369176 2 3369180	3369178	1169096
DATA	DATA	DATA	DATA
Capacity: 90 l/min free flow Outlet: Ø19 mm Maximum pressure: 0,5 (5) MPa (bar) 1 Description: Manufactured in polypropylene, the trigger can be locked in open position. Connection: 1" (F) BSP 2 Description: Manufactured in polypropylene, the trigger can be locked in open position. Connection: 19 (3/4") Ø mm (inch)	1 Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. Capacity: 45 l/min free flow Outlet: 19 (3/4") mm (inch) Maximum pressure: 0,5 (5) MPa (bar) Connection: 19 (3/4") mm (inch) 2 Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. Capacity: 10 l/min free flow Outlet: Ø19, L=157 mm Maximum pressure: 0,3 (3) MPa (bar) Connection: 19 (3/4") mm (inch)	Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. With magnetic mis-filling device. The valve will not open unless a magnetic ring is installed in the container. One spare magnetic ring is included. Capacity: 12 - 45 l/min free flow Outlet: Ø19 mm Maximum pressure: 0,5 (5) MPa (bar) Connection: 19 (3/4") Ø mm (inch)	Capacity: 5-120 l/min free flow Maximum pressure: 1 (10) MPa (bar) Maximum temperature: -10 - +60 °C Accuracy: 1,0 % ± Connection: 1" (F)-(M) BSP



TYPE
Accessories
PART NO.
1 3218020
2 3218018
DATA
1 Model: Telescopic suction tube AdBlue® with suction tube adaptor for IBC
2 Model: ED50 Pump Bracket for Drum & IBC

TYPE
Stainless steel swivel
PART NO.
3369190
DATA
Material: Stainless steel
Connection: 1/2" - 1" (M)-(M) BSP

TYPE
Stainless steel sleeve
PART NO.
3369191
DATA
Material: Stainless steel
Connection: 1" - 1" (F)-(F) BSP

TYPE
Mobile distributor
PART NO.
30111
DATA
Description: Mobile distributor for AdBlue®. Complete fitted with electric pump 12V and automatic nozzle.
Capacity: 35 l/min free flow
Dimension: 1100 x 500 x 470 mm
Pump: 12 V DC
Volume: 110 l

Diesel equipment

Diesel pumps	124
Diesel meters	125
Diesel nozzle	126
Filling tanks	127
Fuel suction unit for gasoline and E85	128



TYPE
Diesel pumps only
PART NO.
1 10101
2 10112
DATA
IP: 55
Connection: 1" (F)-(F) BSP
1 Capacity: 40 l/min free flow
Motor: 140 W
Voltage: 12 V DC
2 Capacity: 65 l/min free flow
Motor: 240 W
Voltage: 24 V DC

TYPE
Pump kit 12V - 40l/min
PART NO.
10100
DATA
Description: Includes: 12V Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with crocodile clamps
Capacity: 40 l/min free flow
Motor: 140 W
Voltage: 12 V AC

TYPE
Pump kit 24V - 43l/min
PART NO.
10120
DATA
Description: Includes: 24V Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with crocodile clamps
Capacity: 40 l/min free flow
Motor: 160 W
Voltage: 24 V DC

TYPE
Pump kit 24V - 60l/min
PART NO.
10110
DATA
Description: Includes: 12V Diesel pump, 4m x 3/4" hose, Automatic nozzle, 2m cable with crocodile clamps
Capacity: 60 l/min free flow
Motor: 160 W
Voltage: 12 V DC

DIESEL PUMPS

DIESEL METERS



TYPE	TYPE	TYPE	TYPE
Pump kits 230V - 50 l/min	Pump kits 230V - 70 l/min	Digital diesel meter	Mechanical diesel meter
PART NO.	PART NO.	PART NO.	PART NO.
10115	10140	1168820	1168034
DATA	DATA	DATA	DATA
Description: Includes: 230V 50Hz AC Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with plug Capacity: 50 l/min free flow Voltage: 230 V AC	Description: Includes: 230V 50Hz AC Diesel pump, 4m x 3/4" hose, Automatic nozzle, Mechanical meter with 3 digits, Wall bracket Connection: 1" (F) Capacity: 70 l/min free flow Voltage: 230 V AC Connection: 1" (F) BSP	Capacity: 80 l/min free flow Maximum pressure: 7 (70) MPa (bar) Maximum temperature: -5 - +50 °C Accuracy: 0,5 % ± Connection: 3/4" (F)-(F) BSP	Capacity: 10-100 l/min free flow Maximum pressure: 1 (10) MPa (bar) Connection: 1" (F) BSP



TYPE
Turbine meter
PART NO.
1169096
DATA
Capacity: 5-120 l/min free flow
Maximum pressure: 1 (10) MPa (bar)
Maximum temperature: -10 - +60 °C
Accuracy: 1,0 % ±
Connection: 1" (F)-(M) BSP

TYPE
Automatic nozzle
PART NO.
16720
DATA
Capacity: 60 l/min free flow
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (F) BSP

TYPE
Automatic nozzle
PART NO.
16722
DATA
Capacity: 90 l/min free flow
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (F) BSP

TYPE
Diesel nozzle
PART NO.
1268983
DATA
Capacity: 120 l/min free flow
Maximum pressure: 1 (10) MPa (bar)
Connection: 1" (F) BSP

DIESEL NOZZLE

FILLING TANKS



TYPE
Swivel
PART NO.
1 16725 2 16711
DATA
1 Thread: 1" - 1" (F)-(M) BSP 2 Thread: 1"-3/4" (F)-(M) BSP

TYPE
Mobile filling tank
PART NO.
10144
DATA
Description: Complete fitted with a 12V electric pump and automatic nozzle. Volume: 440 l

TYPE
Mobile filling tank
PART NO.
10122
DATA
Description: Complete fitted with a 12V electric pump and automatic nozzle. Volume: 220 l

TYPE
Mobile distributor
PART NO.
10111
DATA
Description: Mobile distributor for diesel. Complete fitted with electric pump 12V and automatic nozzle. Volume: 110 l

**TYPE**

Fuel suction unit for gasoline and E85

PART NO.

317-70

DATA

Description:
Suction removal directly from vehicle tanks. The unit includes a 120 l container, air operated pump with a capacity of 7 l/min, fluid filter, hose and adaptors. The unit meets all the requirements for flammable environments.

ANTECKNINGAR

Air equipment

Air treatment

130

Accessories for air

131



TYPE
Filter regulator
PART NO.
1 18715
2 18716
3 18725
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 3/4" (F)-(F) BSP

TYPE
Regulator
PART NO.
1 18721
2 18722
3 18723
4 1888538
5 1888790
6 1888795
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Model: Regulator 1/4"
Connection: 1/4" (F)-(F) BSP
2 Model: Regulator 3/8"-1/2"
Connection: 3/8" / 1/2" (F)-(F) BSP
3 Model: Regulator 3/4"
Connection: 3/4" (F)-(F) BSP
4 Model: Wall bracket for 1/4" FRL
Connection: 1/4" FRL
5 Model: Wall bracket for 3/8-1/2" FRL
Connection: 3/8"-1/2" FRL
6 Model: Wall bracket for 3/4" FRL
Connection: 3/4" FRL

TYPE
Lubricators and filters
PART NO.
1 18717
2 18718
3 18724
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Connection: 1/4" (F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 3/4" (F)-(F) BSP

TYPE
Filter regulator and lubricator
PART NO.
1 18720
2 18719
3 18726
DATA
Maximum pressure: 1,2 (12) MPa (bar)
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 1/4" (F)-(F) BSP

ACCESSORIES FOR AIR

ACCESSORIES FOR AIR



TYPE
Air connection kit
PART NO.
1 1218756
2 1218976
3 1218131
DATA
Maximum pressure: 1,2 (12) MPa (bar)
Hose length: 1,5 m
1 Connection: 1/4" (F)-(M) BSP
2 Connection: 3/8" (F)-(M) BSP
3 Connection: 1/2" (F)-(M) BSP

TYPE
Air hose
PART NO.
1 18700
2 18701
3 18703
DATA
1 Dimension: 8 mm (inch)
Thread: 1/4" (M) BSP
Length: 1,5 m
2 Dimension: 6,35 (1/4") mm (inch)
Thread: 1/4" (F)-(M) BSP
Length: 3 m
3 Dimension: 12 mm mm (inch)
Thread: 1/2" (M)-(M) BSP
Length: 1,5 m

TYPE
Quick couplers for air
PART NO.
1 1888122
2 1888521
3 1887494
4 1887551
5 1887464
6 1887465
7 1887493
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Connection: 1/2" (F) BSP
2 Connection: 1/2" (M) BSPT
3 Connection: 3/8" (F) BSP
4 Connection: 3/8" (M) BSPT
5 Connection: 1/4" (F) BSP
6 Connection: 1/4" (M) BSPT
7 Connection: 3/8" (M) BSPT

TYPE
Tyre inflators and air tools
PART NO.
1 18740
2 18750
3 18741
DATA
Maximum pressure: 1 (10) MPa (bar)
Connection: 1/4" (F) BSP
1 Description: One hand operation tyre inflator gauge. Calibrated pressure gauge with rubber shroud for protection. 65 cm hose with automatically adjusting nozzle.
2 Description: One hand operation tyre inflator.
3 Description: Blow gun with infinitely variable air control for efficient cleaning.

ACCESSORIES FOR AIR

ACCESSORIES FOR AIR



TYPE
Quick coupling tyre valve
PART NO.
1 1887466 3 1887468 2 1887467 4 10875
DATA
1 Description: Revolutionary quick connector for tyre valves. Easy one-hand use, it is designed with a self-locking mechanism that secures the connection during inflation. Pull the sleeve to disconnect, similar to any standard air coupler. The coupler is tested and remains fully functional for 100 000 cycles and more.
2 Description: Revolutionary quick connector for tyre valves.
3 Description: Revolutionary quick connector for tyre valves.
4 Description: Hose with quick coupling tyre valve nozzle, 1,5m. Suitable for 18740 and other

TYPE
Ball valves for air
PART NO.
1 1887258 4 1367262 2 1887257 5 1367258 3 1887260
DATA
1 Model: Ball-Bleeder Valve. Made of brass 1/4" (F) BSP Maximum working pressure: 1,4 (14) MPa (bar)
2 Model: Ball valve G1/4"(f) Maximum working pressure: 2,5 (25) MPa (bar)
3 Model: Ball valve G3/8"(f) Maximum working pressure: 6,4 (64) MPa (bar)
4 Model: Ball valve G1/2"(f) Maximum working pressure: 5,0 (50) MPa (bar)
5 Model: Ball valve G3/4"(f) Maximum working pressure: 5,0 (50) MPa (bar)

TYPE
Needle valve
PART NO.
1 1888045 2 1888047
DATA
1 Thread: 1/4" (F) BSP 2 Thread: 1/2" (F)-(M) BSP

TYPE
Soda blaster
PART NO.
1 18760 2 18761
DATA
Maximum working pressure: 1,2 (bar) MPa (bar) Connection: 1/4" (F) BSP 1 Description: Soda blasting is a convenient method for removing paint, varnish and surface rust without damage. It can be used on glass, rubber or plastic surfaces without scratching them. It doesn't heat up nor deform sheet metal and it is efficient as well over wood. It is gentle and environmentally friendly. Volume: 1,2 l 2 Description: Soda for blasting gun 18761 Volume: 5 l

Hose reels and accessories

Hose reels for standard duty	134
Heavy duty hose reels	139
Accessories for hose reels	145



TYPE
Cable reel 230V
PART NO.
55010
DATA
Capacity: 2000 W
Voltage: 230 V AC
Cable: H05VV-F 3x1,5 mm
Cable length: 15 m
IP: 24

TYPE
Slow motion brake for cable reel
PART NO.
55015
DATA
Description: Mounts on the cable reel and ensures that the cable is reeled in at a controlled speed. For reel 55010.

TYPE
Cable reel 230 V
PART NO.
55020
DATA
Capacity: 3500 W
Voltage: 230 V AC
Cable: H07RN-F 3x2,5 mm
Cable length: 20 m
IP: 24

TYPE
Cable reel 400 V
PART NO.
55030
DATA
Capacity: 3000 W
Voltage: 400 V AC
Cable: H07RN-F 5x1,5 mm²
Cable length: 20 m
IP: 24



TYPE	TYPE	TYPE	TYPE
Cable reel ethernet	Cable reel 12V with battery charger	Air / water	Air / water
PART NO.	PART NO.	PART NO.	PART NO.
55050	55060	37830	37831
DATA	DATA	DATA	DATA
Voltage: 48 V DC Cable: CAT 5E Cable length: 15 m	Description: Complete cable reel for charging 12V vehicles. Includes a fixed wall-mounted charger, control panel and other components for connection. Capacity: 100 A Voltage: 12 V DC Cable: 2x 35 mm ² Cable length: 8 m	Description: With black Polyurethane hose. Dimension: 8 mm Maximum pressure: 2 (20) MPa (bar) Hose length: 15 m	Description: Extra flexible black hose. Dimension: 10 mm Maximum pressure: 2 (20) MPa (bar) Hose length: 12 m



S10-Series

TYPE
Oil / glycol
PART NO.
17820
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (F)-(M) BSP



S10-Series

TYPE
Grease
PART NO.
27837
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
Hose length: 10 m max (without hose)



S10-Series

TYPE
Air / water
PART NO.
37866
DATA
Maximum pressure: 1,5 (15) MPa (bar)
Dimension: 10 (3/8") mm (inch)
Hose length: 10 m
Connection: 3/8" - 3/8" (M)-(M) BSP



S10-Series

TYPE
Various fluids
PART NO.
① 37838 ② 37818
DATA
① Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
② Media: AdBlue®
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP

HOSE REELS FOR STANDARD DUTY

HOSE REELS FOR STANDARD DUTY

S15-Series



TYPE
Oil / glycol
PART NO.
17837
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
Hose length: 15 m

S15-Series



TYPE
Grease
PART NO.
1 27835
2 27834
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

S15-Series



TYPE
Air / water
PART NO.
1 37864
2 37865
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Dimension: 10 (3/8") mm (inch)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
2 Dimension: 12,5 (1/2") mm (inch)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

S15-Series



TYPE
Various fluids
PART NO.
1 37836
2 37828
3 37819
DATA
1 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
3 Media: AdBlue®
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP



TYPE
Oil / glycol
PART NO.
1 17844
2 17840
3 17843
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 10 m
3 Hose length: 15 m

TYPE
Grease
PART NO.
1 27841
2 27840
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

TYPE
Air / water
PART NO.
1 37869
2 37870
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Dimension: 10 (3/8") mm (inch)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
2 Dimension: 12,5 (1/2") mm (inch)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Various fluids
PART NO.
1 37854
2 37850
DATA
1 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

HEAVY DUTY HOSE REELS

HEAVY DUTY HOSE REELS

CC15-Series



TYPE
Without hose
PART NO.
1 17805 2 37805
DATA
Connection: 1/2" (M) BSP 1 Media: Oil Maximum pressure: 9 (90) MPa (bar) Hose length: 15 m max (without hose) 2 Media: Air/Water Maximum pressure: 2,0 (20) MPa (bar) Hose length: 15 m max (without hose)

CC15-Series



TYPE
Oil / glycol
PART NO.
1 17852 2 17853
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 10 (100) MPa (bar) Connection: 1/2" - 1/2" (F)-(M) BSP 1 Hose length: 10 m 2 Hose length: 15 m

CC15-Series



TYPE
Grease
PART NO.
1 27852 2 27853
DATA
Maximum pressure: 35 (350) MPa (bar) 1 Dimension: 6,35 (1/4") mm (inch) Hose length: 10 m Connection: 1/4" - 1/4" (M)-(M) BSP 2 Dimension: 10 (3/8") mm (inch) Hose length: 15 m Connection: 3/8" - 1/4" (F)-(M) BSP

CC15-Series



TYPE
Air / water
PART NO.
1 37877 2 37878 3 37879
DATA
1 Dimension: 10 (3/8") mm (inch) Maximum pressure: 1,5 (15) MPa (bar) Hose length: 10 m Connection: 3/8" - 3/8" (M)-(M) BSP 2 Dimension: 10 (3/8") mm (inch) Maximum pressure: 1,5 (15) MPa (bar) Hose length: 15 m Connection: 3/8" - 3/8" (M)-(M) BSP 3 Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 1,5 (15) MPa (bar) Hose length: 15 m Connection: 1/2" - 1/2" (M)-(M) BSP



CC15-Series



CC15-Series



CC15-Series



CC15-Series

TYPE
High pressure water
PART NO.
37875
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Maximum temperature: 150 °C
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
Windscreen fluid / degreaser
PART NO.
① 37872
② 37873
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (M)-(M) BSP
① Hose length: 10 m
② Hose length: 15 m

TYPE
AdBlue®
PART NO.
① 37886
② 37887
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Connection: 1/2" - 1/2" (M)-(M) BSP
① Hose length: 10 m
② Hose length: 15 m

TYPE
Waste oil
PART NO.
37695
DATA
Dimension: 16 (5/8") mm (inch)
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F)-(M) BSP
Hose length: 6 m

HEAVY DUTY HOSE REELS

HEAVY DUTY HOSE REELS

T15-Series



TYPE
Oil / glycol
PART NO.
1 17833 2 17832
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 7,5 (75) MPa (bar) Connection: 1/2" - 1/2" (F)-(M) BSP 1 Hose length: 15 m max (without hose) 2 Hose length: 15 m

T15-Series



TYPE
Grease
PART NO.
1 27833 2 27832
DATA
Dimension: 10 (3/8") mm (inch) Maximum pressure: 35 (350) MPa (bar) Connection: 3/8" - 3/8" (M)-(M) BSP 1 Hose length: 15 m max (without hose) 2 Hose length: 15 m

T15-Series



TYPE
Air / water
PART NO.
37862
DATA
Maximum pressure: 1,5 (15) MPa (bar) Dimension: 12,5 (1/2") mm (inch) Hose length: 15 m Connection: 1/2" - 1/2" (M)-(M) BSP

T15-Series



TYPE
Various fluids
PART NO.
1 37848 2 37852
DATA
1 Media: Windscreen fluid/Degreaser Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 7,5 (75) MPa (bar) Hose length: 15 m Connection: 1/2" - 1/2" (M)-(M) BSP 2 Media: Hot water Dimension: 10 (3/8") mm (inch) Maximum pressure: 17 (170) MPa (bar) Hose length: 15 m Connection: 3/8" - 3/8" (M)-(M) BSP



T20-Series



T20-Series



T20-Series



T20-Series

TYPE
Oil, glycol, air and water
PART NO.
37845
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 20 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Oil, glycol, air and water
PART NO.
① 17834 ② 17836
DATA
Maximum pressure: 7,5 (75) MPa (bar)
① Dimension: 12,5 (1/2") mm (inch)
Hose length: 20 m
Connection: 1/2" - 1/2" (F)-(M) BSP
② Dimension: 19 (3/4") mm (inch)
Hose length: 15 m
Connection: 3/4" -3/4" (F)-(M) BSP

TYPE
Grease
PART NO.
27850
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 27,5 (275) MPa (bar)
Hose length: 20 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
AdBlue®
PART NO.
37847
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 3/4" - 3/4" (M)-(M) BSP

HEAVY DUTY HOSE REELS

HEAVY DUTY HOSE REELS

TC20-Series



TC20-Series



TC20-Series



TC20-Series



TYPE
Oil / air
PART NO.
1 37902 2 37825
DATA
Dimension: 12,5 (1/2") mm (inch)
Inlet: 1/2" (F)-(M) BSP
Outlet: 1/2" (F) BSP
Maximum working pressure: 6,0 (60) MPa (bar)
1 Hose length: 15 m
Material: Stainless steel
2 Hose length: 20 m
Material: Steel

TYPE
Air / water
PART NO.
1 37901 2 37821
DATA
Inlet: 1/2" (F)-(M) BSP
Outlet: 1/2" (M) BSPT
Maximum working pressure: 1,8 (18) MPa (bar)
1 Hose length: 15 m
Material: Stainless steel
2 Hose length: 20 m
Material: Steel

TYPE
AdBlue®
PART NO.
37904
DATA
Dimension: 12,5 (1/2") mm (inch)
Inlet: 1/2" (F)-(M) BSP
Outlet: 1/2" (F) BSP
Maximum working pressure: 1,0 (10) MPa (bar)
Hose length: 20 m
Material: Stainless steel

TYPE
Various fluids
PART NO.
1 37903 2 37905 3 37906
DATA
1 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 18 (180) MPa (bar)
Hose length: 20 m
Material: Stainless steel
2 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 6,0 (60) MPa (bar)
Hose length: 15 m
Material: Stainless steel
3 Media: Oil/Air
Dimension: 3/8"
Maximum pressure: 40 (400) MPa (bar)
Hose length: 20 m max (without hose)
Material: Steel



T30-Series



T30-Series



T30-Series



F15-Series

TYPE
Oil, glycol and air
PART NO.
1 17878
2 17879
DATA
Maximum pressure: 7,5 (75) MPa (bar)
1 Dimension: 19 (3/4") mm (inch)
Hose length: 30 m max (without hose)
Connection: 3/4" - 1" (M)-(M) BSP
2 Dimension: 25,4 (1") mm (inch)
Hose length: 30 m max (without hose)
Connection: 1" - 1" (M)-(M) BSP

TYPE
Oil, glycol and air
PART NO.
1 17880
2 17881
3 17882
DATA
Maximum pressure: 7,5 (75) MPa (bar)
1 Dimension: 12,5 (1/2") mm (inch)
Hose length: 30 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Dimension: 19 (3/4") mm (inch)
Hose length: 25 m
Connection: 3/4" - 3/4" (F)-(M) BSP
3 Dimension: 25,4 (1") mm (inch)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP

TYPE
Diesel, air
PART NO.
17882
DATA
Dimension: 25,4 (1") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP

TYPE
Oil, glycol and air
PART NO.
17885
DATA
Dimension: 38,1 (1 1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1 1/2" - 1 1/2" (M)-(M) BSP

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS



TYPE
Service tower, wide model
PART NO.
1 17875 2 17877
DATA
Dimension: L2,35 x W1,66 x H3,60 m 1 Description: Service tower for truck workshop, can be equipped with a variety of hose reels and provides a single source centre for oil, grease, anti-freeze and exhaust systems. Up to 16 Hose Reels can be fitted and one exhaust hose reel. Concrete fastener must be ordered separately, P/N.: 17776. Size: LxWxH: 2350 x 1660 x 3600 mm 2 Description: Service tower for truck workshop, can be equipped with a variety of hose reels and provides a single source centre for oil, grease, anti-freeze and exhaust systems. Up to 16 Hose reels and 2 exhaust hose reels can be fitted. Concrete fastener must be ordered separately, P/N.: 17776. Size: LxWxH: 2350 x 1660 x 3600 mm

TYPE
Service tower, narrow model
PART NO.
1 17873 3 17860 2 17874 4 17859
DATA
1 Model: Service Tower Narrow Head for 1 Exhaust Reel Dimension: 3620 x 4420 x 1100 mm 2 Model: Service Tower Narrow Head for 2 Exhaust Reel Dimension: 3620 x 5120 x 1100 mm 3 Model: End Plate For Narrow Head Dimension: 3500 x 550 x 101 mm 4 Model: Drip Pan L=2085 mm, for service tower 17873 Dimension: 2085 x 400 x 185 mm

TYPE
Embedded bracket for service tower
PART NO.
17776
DATA
Description: Concrete fastener for casting into floors, provides a supreme mounting platform for the 17875/17877 service stand. The frame design provides clearance for running piping, hoses and ventilation ducts up through the service stand.

TYPE
Service stand
PART NO.
1 17865 2 17869
DATA
1 Description: Service stand for up to 6 Hose Reels. Possibility to fit a 50kg Grease drum with pump under the drip tray. Fits hose reels series: S10, S15, T15 & CC15. Full size: H2600 x W1540 x D760 mm. Nuts for Hose Reels included. 2 Description: Service stand for up to 6 Hose Reels. Possibility to fit a 50kg Grease drum with pump under the drip tray. Fits all our Hose Reels, including C15 and T20. Full size: H2600 x W1970 x D760 mm. Nuts for hose reels included.

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS



TYPE
Height extension kit for service stand
PART NO.
17864
DATA
Description: In workshops with high vehicles it's an advantage that hose reels are higher up. With our height adapter, the total height of Service stands 17865/69 is 3,1m.
Height: 500 mm

TYPE
Additional brackets for service stand
PART NO.
1 17861 2 17863
DATA
1 Description: With this console, two additional hose reels can be mounted on 17865 and 17869. Placed on either side of service stand.
Length: 555 mm
2 Description: With this console, 1 pc Exhaust Reels can be mounted on 17865 and 17869. Placed on either side of service stand.
Length: 1110 mm

TYPE
Service stand for 3 reels
PART NO.
17866
DATA
Description: Service stand for up to 3 hose reels. Includes drip tray. Fits hose reels series: S10, S15, T15 and CC15. Full size: H2250 x W1200 x D350 mm. Nuts for hose reels included.

TYPE
Service stand for 5 reels
PART NO.
17867
DATA
Description: Service stand for up to 5 hose reels. Includes drip tray. Fits hose reels series: S10, S15, T15 & CC15. Full size: H2250 x W1750 x D350 mm. Nuts for hose reels included.

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS




TYPE
Reel post
PART NO.
17862
DATA
Description: Column for mounting 2 Hose reels. Size: H2400 x W400 x D320 mm. Pre-drilled holes for T15, S10, S15, C15 and CC15 reels.

TYPE
Spill tray
PART NO.
1 17770 4 17773 2 17771 5 17774 3 17772 6 17775
DATA
1 Model: Drip tray wall - 625x320mm 2 Model: Stainless steel drip tray wall - 700 mm 3 Model: Stainless steel drip tray wall - 1000 mm 4 Model: Stainless steel drip tray wall - 1250 mm 5 Model: Stainless steel drip tray wall - 1500 mm 6 Model: Stainless steel drip tray ceiling mounted - 1250 mm

TYPE
Pivoting wall bracket for S10, S15, CC15, C15 & T15-ser.
PART NO.
17751
DATA
Description: The reels can be turned up to 145° by using the pivoted bracket. Fits our Reels: S10, S15, CC15, C15 and T15.

TYPE
Pivoting wall bracket for TC20-ser.
PART NO.
1 17752 2 17753
DATA
1 Description: Pattern 150x200mm, powder coated. 2 Description: Pattern 150x150mm, AISI 304

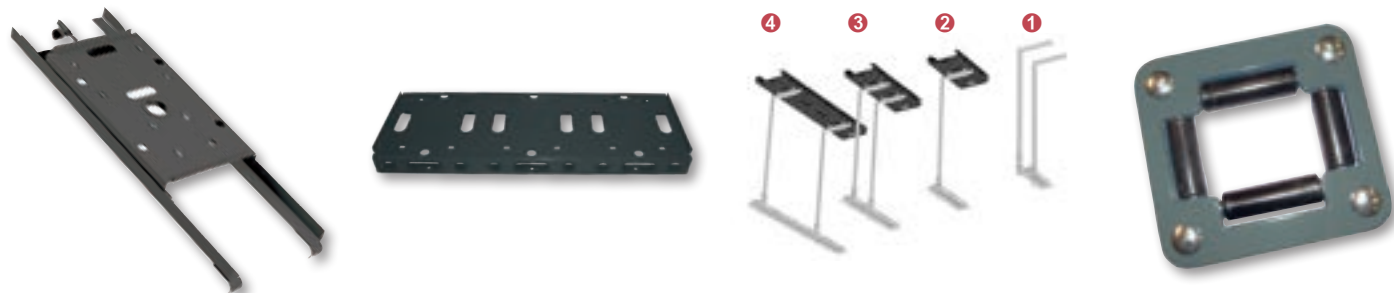

TYPE
IBC bracket for pump and reel
PART NO.
1069237
DATA
Description: Bracket for installation of our air operated pumps and hose reels on an IBC tank. Fits our Reels: S10, S15, CC15, C15 and T15.
Connection: 2" (F) BSP

TYPE
Mounting bracket
PART NO.
1 17757
2 17758
3 17759
DATA
1 Model: Mounting plate - 2 hose reels
2 Model: Mounting plate - 3 hose reels
3 Model: Mounting plate - 5 hose reels

TYPE
Hose guide for suspended ceilings
PART NO.
1 17790
2 17791
3 17792
4 17793
DATA
Height: 850-1300 mm
1 Length: 365 mm
Width: 140 mm
Fits: 1 hose reel
2 Length: 550 mm
Width: 140 mm
Fits: 2 hose reel
3 Length: 820 mm
Width: 140 mm
Fits: 3 hose reel
4 Length: 1400 mm
Width: 140 mm
Fits: 5 hose reel

TYPE
Hose guide
PART NO.
1145998
DATA
Description: Used when mounting a hose reel in a cabinet . Max. hose diameter Ø 42 mm.
Dimension: 110x110 mm

Drum handling



TYPE
Trolley for 208 l drums
PART NO.
1 26720
2 2068734
3 2068735
DATA
1 Description: Trolley suitable for 208 l drums, designed for mobile oil dispensing, mobile grease kits, transport of drums etc. Pump and hose reel can be mounted by use of our brackets. With two large roller bearing wheels Ø200mm and one double braked castor wheel.
2 Description: Easy to fit our bracket 16730 and electrical oil pumps.
3 Description: For easy assembly of our hose reels 10-15 series.

TYPE
Heavy duty trolley for 208 l drums
PART NO.
1 26757
2 26747
DATA
1 Description: Our universal trolleys suitable for 20-208 l drums are designed for mobile oil dispensing, mobile grease kits, transport of drums etc. Pump and hose reel can be mounted by use of our brackets. With two large roller bearing wheels Ø260mm and one double braked castor wheel. Accessories: Hose reel bracket 1357213
2 Description: Heavy duty trolley with two Ø 260 mm wheels and one solid rubber swivelling wheel with brake. Includes an adjustable chain for securing the drum and a bracket mounted on the handle for fixing an air operated pump. A hose reel can also be mounted using optional bracket (1357213)

TYPE
Trolley for 50-60 l drums
PART NO.
1003-100
DATA
Description: Sturdy trolley suitable for 50-60L drum designed for mobile oil dispensing, mobile grease kits, transport of drums etc. Solid construction and very easy to equip to a complete dispenser for any need. Heavy duty trolley for 50-60L drums with two large wheels and two castor wheels.

TYPE
Trolley for 20-60 l drums
PART NO.
1 0985-100
2 26755
DATA
1 Description: Solid construction and very easy to equip to a complete dispenser for any need. With two wheels and drum securing chain.
2 Description: Compact construction and very easy to equip to a complete dispenser for any need. Sturdy locking device for oil and grease drums. Holder for hose included.

DRUM HANDLING



TYPE
Spill safe drum trolley
PART NO.
1 16860 2 16861 3 16862 4 137-55
DATA
1 Description: Drum trolley (26720) with three wheels, 2 large Ø200 mm and one support wheel Ø100 mm, which is equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 2 Description: Drum trolley (28646) Heavy duty. With 3 wheels, 2 large tyres Ø260 mm and one support wheel Ø150 mm, equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 3 Description: Drum trolley (26747) with 3 wheels, 2 large hard wheels Ø260 mm and one support wheel Ø150 mm, equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 4 Description: Drum bund for mounting on existing trolley. If the drum were to start leaking, there will be no spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. For 26720, 26757 and 26747. Drilling during assembly is required.

TYPE
Drum dolly
PART NO.
26744
DATA
Description: Compact drum dolly for easy transport of drums. 4 pcs wheel of which 2 pcs are locking

TYPE
Drum moving trolley
PART NO.
26753
DATA
Description: Easily maneuvered trolley with solid tyres for handling 208 litre steel drums.

TYPE
For drums
PART NO.
1 318-60 2 318-61 3 318-69
DATA
1 Model: Drum bund for 2 drums Volume: 220 l Material: Steel 2 Model: Plastic drum bund for 2 drums Volume: 250 l Material: Polyethylene 3 Model: Safety pallet low model in metal for 4 drums Volume: 290 l Material: Steel



TYPE
For IBCs
PART NO.
1 318-70
2 318-72
DATA
1 Model: Safety pallet for 1 IBC containers
2 Model: Safety pallet for 2 IBC containers

TYPE
Lift for upright drums
PART NO.
26893
DATA
Description: Simple to use, easy to apply. Approved for lifting up to 350 kg.

TYPE
Hydraulic drum lift
PART NO.
26890
DATA
Description: Designed to handle steel drums on safety pallets and equipped with a pedal operated hydraulic lift. Max lift height 600mm. Dimen- sions: width 1045 mm, min height 1340 mm, max height 1840 mm, Lifting weight max 250kg

TYPE
Drum taps
PART NO.
1 16700
2 16701
3 16704
DATA
1 Model: Drum tap 3/4"
Connection: 3/4" (M) BSPT
2 Model: Drum tap 2" made of PP
Connection: 2" (M) BSPT
3 Model: Drum tap 2"
Connection: 2" (M) BSP



 www.eurolube.com

NOTES

Exhaust and fume extraction

Exhaust hose reels	156
Exhaust hoses	160
Single extraction points / pivoting arms	164
Exhaust extraction rail	165
Exhaust nozzles	166
Control equipment	169
Extraction arms	171
Fans and accessories	174



TYPE
Spring drive (without hose max 10m x Ø100mm)
PART NO.
64680
DATA
Dimension: Ø100 (4") mm (inch)
Hose length: 10 m max (without hose)

TYPE
Spring drive 5 m x 100 mm
PART NO.
64684
DATA
Dimension: Ø100 (4") mm (inch)
Maximum temperature: 200 °C
Hose length: 5 m

TYPE
Spring drive 7,5 m x 100 mm
PART NO.
64685
DATA
Dimension: Ø100 (4") mm (inch)
Maximum temperature: 200 °C
Hose length: 7,5 m

TYPE
Spring drive 10 m x 100 mm
PART NO.
64686
DATA
Dimension: Ø100 (4") mm (inch)
Maximum temperature: 200 °C
Hose length: 10 m



TYPE	TYPE	TYPE	TYPE
Spring drive (without hose max 10m x Ø150mm)	Spring drive 10 m x Ø150 mm	Mounting kit for spring exhaust reels	Electric drive (without hose max 10m x Ø150mm)
PART NO.	PART NO.	PART NO.	PART NO.
64350	64353	❶ 68300 ❸ 68302 ❷ 68301 ❹ 68303	63125
DATA	DATA	DATA	DATA
Dimension: Ø150 (6") mm (inch) Hose length: 10 m max (without hose)	Dimension: Ø150 (6") mm (inch) Hose length: 10 m	❶ Dimension: Ø 75 (3") mm (inch) ❷ Dimension: Ø 100 (4") mm (inch) ❸ Dimension: Ø 125 (5") mm (inch) ❹ Dimension: Ø 150 (6") mm (inch)	Dimension: Ø150 (6") mm (inch) Hose length: 10 m max (without hose)



TYPE
Electric drive hose reel 10 m x Ø125 mm
PART NO.
64590
DATA
Dimension: 125 (5") mm (inch)
Maximum temperature: 200 °C
Hose length: 10 m

TYPE
Electric drive hose reel 10 m x Ø150 mm
PART NO.
64591
DATA
Dimension: 150 (6") mm (inch)
Maximum temperature: 200 °C
Hose length: 10 m

TYPE
Control box for electrical exhaust reels
PART NO.
63005
DATA
Model: Control Box, for control of electric driven exhaust hose reel

TYPE
Mounting kit for electrical exhaust reels
PART NO.
1 68305
2 68307
DATA
1 Dimension: Ø 100 (4") mm (inch)
2 Dimension: Ø 150 (6") mm (inch)

EXHAUST HOSE REELS

EXHAUST HOSE REELS



TYPE
Pivoting boom for exhaust hose reel
PART NO.
68417
DATA
Description: The combination of a swinging suspension arm and a spring operated exhaust reel is a good solution when the reel needs to be moved between different work places Note. Exhaust reel and nozzle must be ordered separately.
Length: 4,5 m

TYPE
Double exhaust hose with Y-adapter
PART NO.
① 68220 ③ 68222 ② 68221 ④ 68223
DATA
Maximum temperature: 200 °C
Hose length: 2 x 2,5 m
① Dimension: Ø 75 (3") mm (inch)
② Dimension: Ø 100 (4") mm (inch)
③ Dimension: Ø 125 (5") mm (inch)
④ Dimension: Ø 150 (6") mm (inch)

TYPE
Hose guide for suspended ceilings
PART NO.
62004
DATA
Description: Used for guiding the exhaust hose through suspended ceilings. Adjustable between ceiling and suspended ceiling from 840 mm to 1600 mm.

TYPE
Hose connection kit
PART NO.
① 68485 ③ 68487 ② 68486 ④ 68488
DATA
① Model: Splice 75 mm with Clamps
② Model: Splice 100 mm with Clamps
③ Model: Splice 125 mm with Clamps
④ Model: Splice 150 mm with Clamps



TYPE
Mechanical safety disconnect
PART NO.
1 68491
2 68492
3 68493
DATA
1 Model: Safety disconnect Coupling Ø100 mm (4")
Dimension: 100 mm
2 Model: Safety disconnect Coupling Ø 125 mm (5")
Dimension: 125 mm
3 Model: Safety disconnect Coupling Ø 150 mm (6")
Dimension: 150 mm

TYPE
Magnetic safety disconnect
PART NO.
68571
DATA
Dimension: 100 mm

TYPE
Connection hose for exhaust reel
PART NO.
6310030
DATA
Dimension: 160 (6.2") Ø mm (inch)
Length: 1000 mm

TYPE
Exhaust hose 200°C 5 m
PART NO.
1 68330
2 68340
3 68350
4 68360
DATA
Maximum temperature: 200 °C
1 Dimension: Ø 75 (3") mm (inch)
Hose length: 5 m
2 Dimension: Ø 100 (4") mm (inch)
Hose length: 5 m
3 Dimension: Ø 125 (5") mm (inch)
Hose length: 5 m
4 Dimension: Ø 150 (6") mm (inch)
Hose length: 5 m

EXHAUST HOSES

EXHAUST HOSES



TYPE	TYPE	TYPE	TYPE
Exhaust hose 200°C 7,5 m	Exhaust hose 200°C 10 m	Exhaust hose 200°C 12,5 m	Exhaust hose 300°C 2,5-5 m
PART NO.	PART NO.	PART NO.	PART NO.
1 68333 3 68353 2 68343 4 68363	1 68331 3 68351 2 68341 4 68361	1 68334 3 68354 2 68344 4 68364	1 68459 4 68455 2 68445 5 68460 3 68450
DATA	DATA	DATA	DATA
Maximum temperature: 200 °C 1 Dimension: Ø 75 (3") mm (inch) Hose length: 7,5 m 2 Dimension: Ø 100 (4") mm (inch) Hose length: 7,5 m 3 Dimension: Ø 125 (5") mm (inch) Hose length: 7,5 m 4 Dimension: Ø 150 (6") mm (inch) Hose length: 7,5 m	Maximum temperature: 200 °C 1 Dimension: Ø 75 (3") mm (inch) Hose length: 10 m 2 Dimension: Ø 100 (4") mm (inch) Hose length: 10 m 3 Dimension: Ø 125 (5") mm (inch) Hose length: 10 4 Dimension: Ø 150 (6") mm (inch) Hose length: 10 m	Maximum temperature: 200 °C 1 Dimension: Ø 75 (3") mm (inch) Hose length: 12,5 m 2 Dimension: Ø 100 (4") mm (inch) Hose length: 12,5 m 3 Dimension: Ø 125 (5") mm (inch) Hose length: 12,5 m 4 Dimension: Ø 150 (6") mm (inch) Hose length: 12,5 m	Maximum temperature: 300 °C 1 Dimension: Ø 150 (6") mm (inch) Hose length: 2,5 m 2 Dimension: Ø 75 (3") mm (inch) Hose length: 5 m 3 Dimension: Ø 100 (4") mm (inch) Hose length: 5 m 4 Dimension: Ø 125 (5") mm (inch) Hose length: 5 m 5 Dimension: Ø 150 (6") mm (inch) Hose length: 5 m



TYPE
Exhaust hose 300°C 7,5 m
PART NO.
1 68446 3 68456 2 68451 4 68461
DATA
Maximum temperature: 300 °C
1 Dimension: Ø 75 (3") mm (inch)
Hose length: 7,5 m
2 Dimension: Ø 100 (4") mm (inch)
Hose length: 7,5 m
3 Dimension: Ø 125 (5") mm (inch)
Hose length: 7,5 m
4 Dimension: Ø 150 (6") mm (inch)
Hose length: 7,5 m

TYPE
Exhaust hose 300°C 10 m
PART NO.
1 68447 3 68457 2 68452 4 68462
DATA
Maximum temperature: 300 °C
1 Dimension: Ø 75 (3") mm (inch)
Hose length: 10 m
2 Dimension: Ø 100 (4") mm (inch)
Hose length: 10 m
3 Dimension: Ø 125 (5") mm (inch)
Hose length: 10 m
4 Dimension: Ø 150 (6") mm (inch)
Hose length: 10 m

TYPE
Exhaust hose 300°C 12,5 m
PART NO.
1 68453 2 68463
DATA
Maximum temperature: 300 °C
1 Dimension: Ø 100 (4") mm (inch)
Hose length: 12,5 m
2 Dimension: Ø 150 (6") mm (inch)
Hose length: 12,5 m

TYPE
Exhaust hose 500°C 2,5-7,5 m
PART NO.
1 68579 4 68576 2 68574 5 68581 3 68580
DATA
Maximum temperature: 500 °C
1 Dimension: Ø 150 mm (6") mm (inch)
Hose length: 2,5 m
2 Dimension: Ø 125 (5") mm (inch)
Hose length: 5 m
3 Dimension: Ø 150 mm (6") mm (inch)
Hose length: 5 m
4 Dimension: Ø 125 mm (5") mm (inch)
Hose length: 7,5 m
5 Dimension: Ø 150 mm (6") mm (inch)
Hose length: 7,5 m



TYPE
Exhaust hose 500°C 10-12,5 m
PART NO.
1 68577 3 68578 2 68575 4 68583
DATA
Maximum temperature: 500 °C 1 Dimension: Ø 125 mm (5") mm (inch) Hose length: 10 m 2 Dimension: Ø 150 mm (6") mm (inch) Hose length: 10 m 3 Dimension: Ø 125 mm (5") mm (inch) Hose length: 12,5 m 4 Dimension: Ø 150 mm (6") mm (inch) Hose length: 12,5 m

TYPE
Exhaust hose 650°C 2,5-5 m
PART NO.
1 68479 4 68475 2 68465 5 68480 3 68470
DATA
Maximum temperature: 650 °C 1 Dimension: Ø 150 (6") mm (inch) Hose length: 2,5 m 2 Dimension: Ø 75 (3") mm (inch) Hose length: 5 m 3 Dimension: Ø 100 (4") mm (inch) Hose length: 5 m 4 Dimension: Ø 125 (5") mm (inch) Hose length: 5 m 5 Dimension: Ø 150 (6") mm (inch) Hose length: 5 m

TYPE
Exhaust hose 650°C 7,5 m
PART NO.
1 68466 3 68476 2 68471 4 68481
DATA
Maximum temperature: 650 °C 1 Dimension: Ø 75 (3") mm (inch) Hose length: 7,5 m 2 Dimension: Ø 100 (4") mm (inch) Hose length: 7,5 m 3 Dimension: Ø 125 (5") mm (inch) Hose length: 7,5 m 4 Dimension: Ø 150 (6") mm (inch) Hose length: 7,5 m

TYPE
Exhaust hose 650°C 10 m
PART NO.
1 68467 3 68477 2 68472 4 68482
DATA
Maximum temperature: 650 °C 1 Dimension: Ø 75 (3") mm (inch) Hose length: 10 m 2 Dimension: Ø 100 (4") mm (inch) Hose length: 10 m 3 Dimension: Ø 125 (5") mm (inch) Hose length: 10 m 4 Dimension: Ø 150 (6") mm (inch) Hose length: 10 m



TYPE
Exhaust hose 650°C 12,5 m
PART NO.
1 68468 2 68478 3 68473 4 68483
DATA
Maximum temperature: 650 °C
1 Dimension: Ø 75 (3") mm (inch)
Hose length: 12,5 m
2 Dimension: Ø 125 (5") mm (inch)
Hose length: 12,5 m
3 Dimension: Ø 100 (4") mm (inch)
Hose length: 12,5 m
4 Dimension: Ø 150 (6") mm (inch)
Hose length: 12,5 m

TYPE
Hose support
PART NO.
1 68441 2 68442
DATA
1 Description: Hose Support. Makes it possible to hang the hose on a balancer.
Dimension: 100 (4") mm (inch)
2 Description: Hose Support. Makes it possible to hang the hose on a balancer.
Dimension: 150 (6") mm (inch)

TYPE
Hose clamp
PART NO.
1 6380075 2 6380100 3 6380150 4 6380125
DATA
1 Dimension: 70-90 mm
2 Dimension: 80-100 mm
3 Dimension: 130-165 mm
4 Dimension: 120-140 mm

TYPE
Hose clamp for high temperature hose
PART NO.
1 68590 2 68591 3 68592 4 68593
DATA
Maximum temperature: 650 °C
1 Dimension: 75 mm
2 Dimension: 100 mm
3 Dimension: 125 mm
4 Dimension: 150 mm



TYPE
Balancer
PART NO.
1 68440 4 64438 2 64435 5 64436 3 64437
DATA
1 Model: Balancer, supports loads (7-14 Kg) 2 Model: Balancer 4,5M Wire 7-16 Kg 3 Model: Balancer 3 m Wire 7-14 Kg 4 Model: Balancer with 3,5 M Wire 5-14 Kg 5 Model: Micro switch balancer for fan control, for 64435

TYPE
Complete exhaust extraction kits
PART NO.
1 64441 2 64443
DATA
Capacity: 1800 m³/h Motor: 0,55 kW Voltage: 400 V AC Hose length: 5 m Power consumption: 1,5 A 1 Description: Complete exhaust extraction kits. Consisting of a fan, 5 m standard hose and balancer. Just add the required nozzle. Dimension: 100 (4") mm (inch) 2 Description: Complete exhaust extraction kits. Consisting of a fan, 5 m standard hose and balancer. Just add the required nozzle. Dimension: 150 (6") mm (inch)

TYPE
Exhaust drop on pivoting arm
PART NO.
1 64420 2 64421 3 64422
DATA
Dimension: Ø 150 (6") mm (inch) Hose length: 5 m 1 Length: 4,5 m 2 Length: 6 m 3 Length: 8 m

TYPE
Exhaust extraction rail
PART NO.
1 64530 5 64534 2 64531 6 64535 3 64532 7 64536 4 64533 8 64225
DATA
1 Model: Exhaust Rail 14,6M 2 Model: Exhaust Rail 17,4M 3 Model: Exhaust Rail 20,4M 4 Model: Exhaust Rail 23,2M 5 Model: Exhaust Rail 26,2M 6 Model: Exhaust Rail 29 M 7 Model: Exhaust Rail 34,8 M 8 Model: Mounting Tool for rubber seal



TYPE
Internal exhaust trolley
PART NO.
1 64211
2 64212
3 64213
DATA
1 Model: Exhaust Trolley. Internal for Ø100 mm/4" nozzle with wise grip
2 Model: Exhaust Trolley. Internal for Ø150 mm/6"nozzle with wise grip
3 Model: Internal exhaust trolley Ø 100 mm / 4", without balancer

TYPE
Connection kit for hose reel on exhaust rail
PART NO.
64595
DATA
Description: For mounting on a rail to achieve a larger working area
Includes: Mounting kit and internal trolley. Order separately: Exhaust reel, hose and nozzle based on application.

TYPE
Rubber nozzle with probe opening and clamp fixing
PART NO.
1 68320
2 68324
3 68321
4 68322
5 68323
DATA
1 Inlet: Ø 75 mm
Opening: 155 x 90 (Ø 115) mm
2 Inlet: Ø 100 mm
Opening: 155 x 90 (Ø 115) mm
3 Inlet: Ø 100 mm
Opening: 210 x 115 (Ø 160) mm
4 Inlet: Ø 125 mm
Opening: 210 x 115 (Ø 160) mm
5 Inlet: Ø 150 mm
Opening: 210 x 115 (Ø 160) mm

TYPE
Rubber nozzle with probe opening and damper
PART NO.
1 68315
2 68316
3 68317
4 68318
5 68319
DATA
1 Inlet: Ø 75 mm
Opening: 155 x 90 (Ø 115) mm
2 Inlet: Ø 100 mm
Opening: 155 x 90 (Ø 115) mm
3 Inlet: Ø 100 mm
Opening: 210 x 115 (Ø 160) mm
4 Inlet: Ø 125 mm
Opening: 210 x 115 (Ø 160) mm
5 Inlet: Ø 150 mm
Opening: 210 x 115 (Ø 160) mm

EXHAUST NOZZLES

EXHAUST NOZZLES



TYPE	
Rubber nozzle with probe opening, damper and clamp	
PART NO.	
1 68325	4 68328
2 68326	5 68329
3 68327	
DATA	
1 Inlet: Ø 75 mm	
Opening: 155 x 90 (Ø 115) mm	
2 Inlet: Ø 100 mm	
Opening: 155 x 90 (Ø 115) mm	
3 Inlet: Ø 100 mm	
Opening: 210 x 115 (Ø 160) mm	
4 Inlet: Ø 125 mm	
Opening: 210 x 115 (Ø 160) mm	
5 Inlet: Ø 150 mm	
Opening: 210 x 115 (Ø 160) mm	

TYPE	
Rubber nozzle with probe opening, spring fixing	
PART NO.	
1 68520	4 68523
2 68521	5 68524
3 68522	
DATA	
1 Inlet: Ø 75 mm	
Opening: 155 x 90 (Ø 115) mm	
2 Inlet: Ø 100 mm	
Opening: 155 x 90 (Ø 115) mm	
3 Inlet: Ø 100 mm	
Opening: 210 x 115 (Ø 160) mm	
4 Inlet: Ø 125 mm	
Opening: 210 x 115 (Ø 160) mm	
5 Inlet: Ø 150 mm	
Opening: 210 x 115 (Ø 160) mm	

TYPE	
Metal nozzle with rubber lid	
PART NO.	
1 68310	4 68313
2 68311	5 68314
3 68312	
DATA	
1 Inlet: Ø 75 mm	
Opening: Ø 100 mm	
2 Inlet: Ø 100 mm	
Opening: Ø 100 mm	
3 Inlet: Ø 125 mm	
Opening: Ø 125 mm	
4 Inlet: Ø 125 mm	
Opening: Ø 150 mm	
5 Inlet: Ø 150 mm	
Opening: Ø 150 mm	

TYPE	
Nozzle for vertical exhausts	
PART NO.	
1 68396	4 68399
2 68397	5 68402
3 68398	
DATA	
1 Model: Exhaust Nozzle, Vertical 125 mm	
2 Model: Exhaust Nozzle, Vertical for 150 mm hose, 250mm opening	
3 Model: Telescopic Handle for stacker Nozzles.	
4 Model: Spring Clip for stacker Nozzles.	
5 Model: Nozzle for exhaust, giraffe Ø 150 (6")	



TYPE
Exhaust nozzle for hidden exhausts
PART NO.
1 68555
2 68556
3 68565
DATA
1 Model: Exhaust Nozzle hand Pump Ø 150 (6")
2 Model: Exhaust Nozzle Ø 150 (6") air regulated
3 Model: Exhaust Nozzle for hidden exhaust pipe Ø100 with inner plier

TYPE
Exhaust nozzle for hidden exhausts
PART NO.
68566
DATA
Model: Exhaust nozzle for hidden/integrated exhaust pipes, good grip in curved pipes 150x350mm
Maximum temperature: 100 °C
Opening: 350x150 mm
Connection: Ø 100 (4") mm (inch)

TYPE
Accessories for nozzle 68566
PART NO.
1 68600
2 68601
3 68602
4 68603
5 68604
DATA
1 Model: Adapter 4"-3", for 3" (75mm) exhaust hose
2 Model: Adapter 4"-5", for 5" (125mm) exhaust hose
3 Model: Adapter 4"-6", for 6" (150mm) exhaust hose
4 Model: Wall mount holder, magnetic
5 Model: Wall mount holder, magnetic, for secondary exhaust adaptor incl. hose

TYPE
Exhaust funnel
PART NO.
68395
DATA
Description: For simple, fast and accurate exhaust gas measuring. The adjustable exhaust nozzle is placed behind the vehicle exhaust pipe in order to capture and remove exhaust fumes. The exhaust fume measuring is entirely resistance free and cooling air reduces the temperature. To be used with Ø150mm hoses and nozzles.



TYPE
Exhaust nozzle for construction machinery
PART NO.
68568
DATA
Model: Exhaust nozzle for heavy machinery Opening: Ø 400 mm Connection: Ø 145 mm

TYPE
Touchless exhaust nozzle
PART NO.
68554
DATA
Description: Adjustable nozzle on trolley for side and under carriage tailpipes, Standards EPA 07 (Euro 6). Connects to existing Exhaust hose. Opening: 550x160 mm Connection: Ø 150 (6") mm (inch)

TYPE
Starter
PART NO.
63000
DATA
Description: When one or two exhaust reels are installed. Used together with a microswitch (68400). Comes complete with built-in contactor and transformer. It must be fitted with relevant motor overload protector (not included), Starter 3~ 230/400 V Voltage: 3~ 230/400 V AC

TYPE
Motor overload protector
PART NO.
1 68421 4 68424 2 68422 5 68425 3 68423
DATA
1 Current: 0,9-1,3 A 2 Current: 1,4-2,0 A 3 Current: 2,3-3,2 A 4 Current: 4,5-6,3 A 5 Current: 7,2-10,0 A



TYPE
Frequency inverter
PART NO.
1 64370 2 64371 3 64372 4 64374

TYPE
Pressure sensor
PART NO.
63015
DATA
Maximum air pressure: 0-2500 Pa

TYPE
Fan starter with push button
PART NO.
1 64245 2 64246 3 64247 4 64248 5 64249 6 64250

TYPE
Start/stop with indicator for exhaust fan
PART NO.
68408
DATA
Description: For controlling automatic dampers and/or fans for exhaust reels or extraction arms. Use together with starter (63000) and automatic damper (64312). The indicator light can be wired to indicate when the damper is open and fan is on. 2x NO contacts. Power supply: 24 V AC/DC
Voltage: 24 V AC

CONTROL EQUIPMENT

EXTRACTION ARMS



TYPE	TYPE	TYPE	TYPE
Automatic damper	Transformer	Micro switch	Extraction arm
PART NO.	PART NO.	PART NO.	PART NO.
64312	68431	68400	❶ 64700 ❷ 64701 ❸ 64702
DATA	DATA	DATA	DATA
Model: Fully automatic, motorised damper, Ø 160 mm Description: with built -in energy saver. Adjustable delay 7 sec. to 6 min. Can also be controlled manually if fitted with a switch assembly (68400). Voltage: 24 V AC	Model: Transformer 230/24V 75W for halogen Lamp Cartridge (68430) or automatic damper / frequency inverter Voltage: 230 V AC	Description: Used for control of damper and fan in spring operated exhaust reels. This device can be used with starter (63000) or automatic damper (64315 or 64312)	❶ Length: 1,5 m ❷ Length: 2 m ❸ Length: 3 m



TYPE
Ceiling bracket for extraction arm
PART NO.
1 64720
2 64721
DATA
1 Length: 0,5 m
2 Length: 1 m

TYPE
Bodywork extraction arm
PART NO.
64711
DATA
Length: 5 m

TYPE
Extraction arm with extension swing arm
PART NO.
1 64703
2 64704
3 64705
4 64706
5 64707
DATA
1 Length: 4 m
2 Length: 5 m
3 Length: 7 m
4 Length: 9 m
5 Length: 11 m

TYPE
Accessories for extraction arms 64700-series
PART NO.
1 64725
2 64726
3 64727
4 63023
DATA
1 Model: Led-Lighting 24V with On/Off Switch for Fan
2 Model: Lighting for dust extraction LED lamp 24V
3 Model: On/Off Switch for Fan
4 Model: Relay box 24V AC, used for electric dampers and led lighting

EXTRACTION ARMS

EXTRACTION ARMS



TYPE
Accessories for extraction arms 64700-series
PART NO.
1 64730 2 64731
DATA
1 Model: Extraction hood for glue fumes 2 Model: Extension Hose 3,5M Fume Extraction Arm

TYPE
Mobile mechanical filter
PART NO.
1 64620 3 64623 2 64621 4 64624
DATA
1 Description: 1 phase 0,75 kW 220-240V 50Hz. Delivered with a 5m cable. Filter up to 98% of the pollution. Unit with extraction arm. Length: 2 m 2 Description: 1 phase 0,75 kW 220-240V 50Hz. Delivered with a 5m cable. Filter up to 98% of the pollution. Unit with extraction arm. Length: 3 m 3 Description: Filter cassette for mobile extraction filter (replacement unit) Length: 430 mm 4 Description: Filter cassette with carbon filtration for mobile extraction filter (replacement unit) Length: 430 mm

TYPE
Extraction arm 2 / 3 / 4 m
PART NO.
1 64400 3 64405 2 64402 4 64615
DATA
1 Model: Fume Extraction Arm 2 m 2 Model: Fume Extraction Arm 3 m 3 Model: Fume Extraction Arm 4 m 4 Model: Manual Damper with rubber seal

TYPE
Pivotable extension arm
PART NO.
1 64416 2 64414 3 64415
DATA
1 Model: Extension Swing Arm 1,5M 2 Model: Extension Swing Arm 2,5M 3 Model: Extension Swing Arm 4,5M



TYPE
Lighting, power switch
PART NO.
1 68430
2 68433
3 63023
DATA
1 Model: LED Lamp Cartridge 24V, 20W with Switch and 10M Cable
2 Model: Switch without Lamp with 10M Cable
3 Model: Relay box 24V AC, used for elec- tric dampers and led lighting

TYPE
Fan 0,55 kW for exhaust and fumes
PART NO.
64323
DATA
Capacity: 1800 m³/h
Motor: 0,55 kW
Voltage: 3~ 400 V, 50Hz V AC
Number of active exhausts (cars): < 3
Number of active exhausts (trucks): 1
Power consumption: 1,5 A

TYPE
Fan 0,75 kW for exhaust and fumes
PART NO.
64325
DATA
Capacity: 2160 m³/h
Motor: 0,75 kW
Voltage: 3~ 400 V, 50Hz V AC
Number of active exhausts (cars): < 4
Number of active exhausts (trucks): 1
Power consumption: 2,0 A

TYPE
Fan 0,75 kW for exhaust and fumes
PART NO.
64465
DATA
Capacity: 2160 m³/h
Motor: 0,75 kW
Voltage: 1~ 230 V, 50Hz V AC
Number of active exhausts (cars): < 4
Number of active exhausts (trucks): 1
Power consumption: 5,0 A



TYPE Fan 1,1 kW for exhaust and fumes	TYPE Fan 0,75 kW for larger systems	TYPE Fan 2,2 kW for larger systems	TYPE Fan 4,0 kW for larger systems
PART NO. 64330	PART NO. 64360	PART NO. 64361	PART NO. 64362
DATA Capacity: 3000 m³/h Motor: 1,1 kW Voltage: 3~ 400 V, 50Hz V AC Number of active exhausts (cars): < 5 Number of active exhausts (trucks): < 2 Power consumption: 2,7 A	DATA Capacity: 2500 m³/h Motor: 0,75 kW Voltage: 3~ 230/400 V AC Power consumption: 1,7 A	DATA Capacity: 5500 m³/h Motor: 2,2 kW Voltage: 3~ 230/400 V AC Power consumption: 4,6 A	DATA Capacity: 7500 m³/h Motor: 4,0 kW Voltage: 3~ 230/400 V AC Power consumption: 7,7 A



TYPE
Fan 7,5 kW for larger systems
PART NO.
64364
DATA
Capacity: 12000 m³/h
Motor: 7,5 kW
Voltage: 3~ 230/400 V AC
Power consumption: 8,05 A

TYPE
Fan mounting kit
PART NO.
68410
DATA
Description: For mounting of fans 64323-64325 directly on exhaust reels. Consists of bracket, rubber ring and fan socket.

TYPE
Round to square outlets
PART NO.
1 68401 4 64382
2 64380 5 64383
3 64381
DATA
1 Model: Fan Outlet Ø250mm for 64330
2 Model: Fan Outlet Ø250 mm for 64360
3 Model: Fan Outlet Ø315 mm for 64361
4 Model: Fan Outlet Ø400 mm for 64362
5 Model: Fan Outlet Ø500 mm for 64364

TYPE
Soft connection
PART NO.
1 64384 4 64387
2 64385 5 64388
3 64386 6 64389
DATA
1 Model: Soft Connection Ø160 mm
2 Model: Soft Connection Ø200 mm
3 Model: Soft Connection Ø250 mm
4 Model: Soft Connection Ø315mm
5 Model: Soft Connection Ø400 mm
6 Model: Soft Connection Ø500 mm



Anti-Vibration Damper for 64556

NOTES

117-01	33	257-32FP	71	317-53	99	530-02	27
117-02	32	257-33	72	317-54	98	530-03	27
117-08	32	257-33FP	72	317-60	91	555	76
117-10	104	257-34	73	317-61	91	596-C1	79
117-11	104	257-34FP	73	317-62	92	596-D1	79
117-12	104	257-35	72	317-63	92	0925-026	112
117-14	105	257-35FP	72	317-65	91	0925-400	112
117-15	105	257-36	73	317-66	91	0949-160	92
117-21	104	257-36FP	73	317-70	128	0950-100	55
117-90	11	257-37	73	318-30	96	0950-100-BL	55
117-90	33	257-37FP	73	318-45	93	0950-100-YE	55
137-01	35	257-39	72	318-51	94	0950-200	110
137-02	36	257-39FP	72	318-55	94	0950-200-BL	110
137-03	36	257-40	72	318-60	151	0950-200-GREY	110
137-04	36	257-40FP	72	318-61	151	0950-300	110
137-05	36	257-51	70	318-62	93	0950-400	118
137-09	40	257-52	71	318-63	94	0950-700	56
137-10	40	257-55	70	318-64	94	0951-200	97
137-11	34	257-56	70	318-65	93	0951-500	98
137-12	35	316-12	47	318-66	93	0951-500W	111
137-12EF	35	316-13	47	318-67	94	0951-700	98
137-13	40	316-14	47	318-68	94	0951-900	98
137-14	40	316-15	47	318-69	151	0960-000	56
137-15	41	316-19	48	318-70	152	0985-100	150
137-16	41	316-20	48	318-72	152	1003-100	150
137-17	40	317-01	46	318-80	95	1050-100	33
137-18	40	317-03	46	318-81	95	1050-200	102
137-19	35	317-04	47	318-82	95	1050-300	102
137-21	74	317-05	48	318-85	95	1050-400	118
137-22	74	317-06	48	318-86	95	1050-405	118
137-23	41	317-07	49	318-87	95	1050-800	56
137-24	41	317-08	49	327-04	76	1050-900	33
137-25	41	317-09	50	327-12	76	1050-900	102
137-26	41	317-10	50	386-03	107	1056-LE4	77
137-27	35	317-11	46	386-04	108	1056-SE4	77
137-35	57	317-12	45	386-05	107	1470-100	56
137-36	57	317-13	45	386-06	108	1606-B	85
137-37	56	317-14	45	387-03	106	1607-B	84
137-38	57	317-14EF	45	387-04	107	1610-BL	84
137-46	32	317-15	45	387-05	106	1613-B	85
137-46	41	317-15EF	45	387-06	107	1627-B	84
137-50	110	317-19	46	387-07	106	1627-S	84
137-55	151	317-20	46	387-08	107	1629-B	85
137-57	33	317-21	49	387-15	119	1634	84
137-60	36	317-22	49	387-30	117	1688-B	85
137-61	37	317-23	50	387-40	116	1820-1	87
137-62	37	317-25	46	387-41	116	1822-A1	87
157-03	38	317-26	46	387-42	116	1823-1	87
157-04	39	317-27	47	387-45	116	1961-S	85
157-25	41	317-28	47	387-46	116	1966-S	85
157-26	41	317-41	93	387-50	116	2105	85
208-A	86	317-44	90	387-51	116	2106	85
257-03FP	73	317-44	95	387-52	116	2107	85
257-05	73	317-44SP	90	387-53	116	2108	85
257-06	73	317-44SP	95	387-54	116	2109	85
257-22	74	317-48	99	500	76	2110	85
257-31	71	317-49	90	501-A	86	2112	85
257-31FP	71	317-50	105	512-RF	85	2114	85
257-32	71	317-52	99	530-01	26	10100	124

10101	124	15740	68	16770	63	17832	48
10110	124	15741	40	16770	111	17832	141
10111	127	15741	68	16771	63	17833	48
10112	124	15755	38	16771	111	17833	141
10115	125	15756	38	16772	63	17834	49
10120	124	15765	39	16772	111	17834	142
10122	127	15766	39	16773	63	17836	49
10140	125	15767	39	16773	111	17836	142
10144	127	15830	37	16776	63	17837	45
10215	108	15831	37	16776	111	17837	137
10255	108	15832	90	16777	63	17840	46
10277	108	16700	152	16777	111	17840	138
10305	53	16701	152	16778	63	17843	46
10336	53	16703	54	16778	111	17843	138
10336EF	53	16704	152	16779	63	17844	46
10371	51	16705	60	16779	111	17844	138
10372	51	16708	54	16780	55	17852	47
10376	53	16709	60	16781	61	17852	139
10377	53	16710-50	59	16782	61	17853	47
10391	51	16711	127	16783	63	17853	139
10396	53	16711-50	59	16783	112	17859	145
10422	52	16716	51	16784	63	17860	145
10452	52	16717	52	16784	112	17861	146
10471	52	16719	51	16785	62	17862	147
10472	52	16720	126	16786	62	17863	146
10491	52	16721	54	16787	62	17864	146
10522	11	16722	126	16788	62	17865	145
10552	11	16724	54	16789	55	17866	146
10571	11	16725	127	16790	96	17867	146
10572	11	16730	60	16790	112	17869	145
10591	11	16733	60	16791	96	17873	145
10710	57	16735	59	16793	96	17874	145
10720	55	16737	59	16794	96	17875	145
10721	110	16740	58	16797	99	17877	145
10730	56	16741	58	16813	52	17878	50
10875	132	16742	58	16818	52	17878	144
11645	56	16743	58	16860	151	17879	50
11646	110	16744	58	16861	151	17879	144
11647	110	16745	58	16862	151	17880	50
11716	102	16746	58	17751	147	17880	144
11717	102	16747	59	17752	147	17881	50
11780	96	16749	61	17753	147	17881	144
11782	91	16750	58	17757	148	17882	50
11783	91	16751	58	17758	148	17882	144
11786	105	16752	61	17759	148	17882	144
11786	118	16753	58	17770	147	17885	51
11787	105	16754	58	17771	147	17885	144
11787	118	16755	54	17772	147	18700	131
11788	106	16756	63	17773	147	18701	131
11788	118	16756	112	17774	147	18703	131
12093	153	16760	63	17775	147	18715	130
12740	103	16760	112	17776	145	18716	130
12741	103	16761	63	17790	148	18717	130
12745	103	16761	112	17791	148	18718	130
12746	103	16763	63	17792	148	18719	130
13770	34	16763	112	17793	148	18720	130
15735	38	16764	58	17805	139	18721	130
15736	38	16765-60	58	17820	45	18722	130
15740	40	16767	61	17820	136	18723	130

18724	130	26721	83	27837	136	37869	138
18725	130	26722	83	27840	76	37870	138
18726	130	26723	83	27840	138	37872	107
18740	131	26725	83	27841	76	37872	140
18741	131	26726	83	27841	138	37873	107
18750	131	26727	83	27850	76	37873	140
18760	132	26728	83	27850	142	37875	140
18761	132	26729	83	27852	76	37877	139
20701	77	26730	83	27852	139	37878	139
20702	77	26731	83	27853	76	37879	139
20703	77	26732	83	27853	139	37886	119
20705	77	26733	83	28316	82	37886	140
20706	77	26735	78	30111	122	37887	119
20710	74	26736	78	30210	108	37887	140
20711	74	26737	78	30211	120	37901	143
20712	74	26738	75	30215	120	37902	143
20720	74	26739	84	30730	110	37903	143
20721	74	26741	69	30735	110	37904	143
20730	78	26742	69	30740	110	37905	143
20731	78	26744	151	30741	110	37906	143
20742	78	26745	79	30750	111	43420	54
20745	78	26746	69	30752	111	43706	86
25532	78	26747	150	36722	109	43718	86
25534	78	26752	81	36723	109	43762	86
25710	67	26753	151	36724	109	43770	84
25711	67	26755	150	36731	109	43771	84
25712	67	26757	150	36732	109	53132	17
25720	68	26760	81	36733	109	53132	29
25725	68	26762	81	36781	105	53140	29
25730	67	26763	81	37695	140	53141	29
25731	67	26764	81	37805	139	53142	30
25732	67	26765	81	37818	119	53154	17
25735	66	26767	81	37818	136	53154	29
25736	66	26768	82	37819	119	53167	28
25737	66	26769	82	37819	137	53171	16
25745	67	26770	81	37821	143	53171	29
25746	67	26771	81	37825	143	53183	16
25765	66	26772	81	37828	137	53183	29
25766	66	26773	81	37830	135	53187	28
25767	66	26774	81	37831	135	53191	17
25770	80	26775	81	37836	106	53191	29
25775	80	26778	81	37836	137	53192	17
25787	68	26780	153	37838	106	53192	29
25788	68	26781	78	37838	136	53193	17
25794	66	26782	78	37845	49	53193	29
25795	66	26783	78	37845	142	53195	28
25796	66	26784	75	37847	120	53197	15
26700	71	26796	83	37847	142	53287	16
26705	70	26890	152	37848	106	53287	29
26710	82	26893	152	37848	141	53393-50	16
26711	82	27832	76	37850	138	53393-50	24
26712	82	27832	141	37852	141	53393-100	16
26715	80	27833	76	37854	106	53393-100	24
26716	80	27833	141	37854	138	53400	22
26716-01	80	27834	75	37862	141	53401	22
26716-11	80	27834	137	37864	137	53402	22
26717	83	27835	75	37865	137	53403	22
26718	84	27835	137	37866	136	53404	23
26720	150	27837	75	37869	106	53406	27

53408	22	53890-125	15	64353	157	64705	172
53409	24	53890-250	15	64360	175	64706	172
53411-50	23	53891	16	64361	175	64707	172
53411-100	23	53892	16	64362	175	64711	172
53417	17	53893	16	64364	176	64720	172
53417	28	55010	134	64370	170	64721	172
53417-1	17	55015	134	64371	170	64725	172
53417-1	28	55020	134	64372	170	64726	172
53429	23	55030	134	64374	170	64727	172
53430	27	55050	135	64380	176	64730	173
53432	23	55060	135	64381	176	64731	173
53437	17	59830	26	64382	176	65390	177
53437	28	59831	26	64383	176	65391	177
53442	24	60100	42	64384	176	68220	159
53443	24	60110	42	64385	176	68221	159
53445	24	60212	117	64386	176	68222	159
53792	12	60224	117	64387	176	68223	159
53801	8	60230	117	64388	176	68300	157
53802	8	60240	117	64389	176	68301	157
53803	11	60242	117	64400	173	68302	157
53804	11	60300	42	64402	173	68303	157
53820	8	60310	42	64405	173	68305	158
53821	8	60325	43	64414	173	68307	158
53822	8	60327	43	64415	173	68310	167
53823	8	61012	42	64416	173	68311	167
53824	9	61013	44	64420	165	68312	167
53826	10	61024	42	64421	165	68313	167
53827	10	61025	44	64422	165	68314	167
53828	10	61611	42	64435	165	68315	166
53829	10	61614	42	64436	165	68316	166
53830	9	62000	44	64437	165	68317	166
53831	9	62001	45	64438	165	68318	166
53835	10	62004	159	64441	165	68319	166
53836	9	62010	43	64443	165	68320	166
53850	12	62011	44	64465	174	68321	166
53860	12	62020	43	64530	165	68322	166
53861	12	62021	43	64531	165	68323	166
53862	12	62100	44	64532	165	68324	166
53863	12	63000	169	64533	165	68325	167
53864	12	63005	158	64534	165	68326	167
53865	12	63015	170	64535	165	68327	167
53866	12	63023	172	64536	165	68328	167
53868	13	63023	174	64590	158	68329	167
53870	13	63125	157	64591	158	68330	160
53871	13	64211	166	64595	166	68331	161
53872	13	64212	166	64615	173	68333	161
53874	13	64213	166	64620	173	68334	161
53875	13	64225	165	64621	173	68340	160
53876	13	64245	170	64623	173	68341	161
53877	13	64246	170	64624	173	68343	161
53878	13	64247	170	64680	156	68344	161
53881	10	64248	170	64684	156	68350	160
53882	15	64249	170	64685	156	68351	161
53883	16	64250	170	64686	156	68353	161
53886	16	64312	171	64700	171	68354	161
53889	15	64323	174	64701	171	68360	160
53890	15	64325	174	64702	171	68361	161
53890-25	15	64330	175	64703	172	68363	161
53890-50	15	64350	157	64704	172	68364	161

68395	168	68492	160	1167431	54	1367347	59
68396	167	68493	160	1167744	55	1367422	59
68397	167	68520	167	1167783	55	1367587	60
68398	167	68521	167	1168034	125	1367594	60
68399	167	68522	167	1168465	25	1367769	97
68400	171	68523	167	1168466	25	1367770	97
68401	176	68524	167	1168475	25	1367771	97
68402	167	68554	169	1168476	25	1367772	97
68408	170	68555	168	1168574	14	1367775	82
68410	176	68556	168	1168574	30	1367776	82
68417	159	68565	168	1168578	14	1568507	62
68421	169	68566	168	1168578	30	1887257	59
68422	169	68568	169	1168591	55	1887257	132
68423	169	68571	160	1168595	55	1887258	132
68424	169	68574	162	1168683	55	1887260	59
68425	169	68575	163	1168684	55	1887260	132
68430	174	68576	162	1168686	55	1887464	131
68431	171	68577	163	1168813	13	1887465	131
68433	174	68578	163	1168814	13	1887466	132
68440	165	68579	162	1168815	13	1887467	132
68441	164	68580	162	1168816	13	1887468	132
68442	164	68581	162	1168817	52	1887493	131
68445	161	68583	163	1168818	108	1887494	131
68446	162	68590	164	1168819	108	1887551	131
68447	162	68591	164	1168820	53	1888045	132
68450	161	68592	164	1168820	125	1888047	132
68451	162	68593	164	1168964	14	1888122	131
68452	162	68600	168	1168964	30	1888521	131
68453	162	68601	168	1168969	25	1888538	130
68455	161	68602	168	1168970	26	1888790	130
68456	162	68603	168	1168980	14	1888795	130
68457	162	68604	168	1168980	30	2060201	83
68459	161	131000	87	1168985	14	2068734	150
68460	161	300805	87	1169096	121	2068735	150
68461	162	304810	87	1169096	126	2150210	66
68462	162	317400	87	1169340	54	2168600	80
68463	162	323060	87	1169350	54	2168915	26
68465	163	339841	87	1169360	54	2168920	81
68466	163	343289	79	1218131	131	2169180	75
68467	163	343291	79	1218756	131	2169182	84
68468	164	343432	79	1218976	131	2169183	84
68470	163	343501	79	1268983	126	2169184	84
68471	163	343521	79	1317180	60	2169185	84
68472	163	1069237	61	1317181	60	2169270	75
68473	164	1069237	148	1357676	60	2315625	77
68475	163	1117065	62	1367258	59	2315627	77
68476	163	1117178	61	1367258	132	2315629	77
68477	163	1117277	62	1367259	59	2357404	69
68478	164	1117610	62	1367262	59	2357405	69
68479	163	1117701	61	1367262	132	2553201	79
68480	163	1117704	61	1367264	59	2553401	79
68481	163	1117705	61	1367265	59	2553402	79
68482	163	1117707	61	1367266	59	3187443	25
68483	164	1117718	61	1367267	60	3188579	100
68485	159	1118436	61	1367268	60	3188587	96
68486	159	1137123	61	1367269	60	3188588	97
68487	159	1145998	148	1367270	60	3188595	96
68488	159	1155153	62	1367271	60	3188596	96
68491	160	1157234	62	1367273	82	3188771	100

3188772	100
3218018	122
3218020	122
3218023	112
3218025	113
3218125	113
3315098	92
3318791	14
3318791	30
3318795	14
3318795	30
3368514	14
3368514	30
3368519	62
3368520	62
3369174	121
3369175	121
3369176	121
3369178	121
3369179	120
3369180	121
3369190	122
3369191	122
3672261	109
3672264	109
6310030	160
6380075	164
6380100	164
6380125	164
6380150	164
A-210	86
A-212	86
A-1184	86
B11740	32
B11741	32
B11741-10	104
B13760	34
B13761	34
B13762	34
B315790	88
B315791	88
C11745	90
NW50-EUR	112

24-HOUR ONLINE SUPPORT & ORDERING



Products

- ▶ NEX-U-®
- ▶ LUBE-Master
- ▶ Oil equipment
- ▶ Grease equipment
- ▶ Diaphragm pumps
- ▶ Waste oil equipment
- ▶ Multi-Fluid equipment
- ▶ Equipment for AdBlue®
- ▶ Equipment for diesel
- ▶ Compressed air
- ▶ Hose & cable reels
- ▶ Drum handling



One of the cornerstones of Eurolube service is instant support in whatever you may require.

TECHNICAL DOCUMENTS

On our website you will be able to easily explore our full product range with detailed photographs, descriptions in English, Swedish and German, individual product data, downloads of manuals and leaflets, and the ability to request quotations on particular products.

PUMP SELECTION GUIDE

We have also developed a tool to aid you in selecting the correct pump for the task. Using our pump selection guide you simply select the fluid to be pumped, and it will tell you which materials are compatible.

ONLINE ORDERING

For our registered distributors, we offer the functionality to log in and place orders directly on our website. When you are logged in as a distributor, you can access e.g.

- Prices and discounts
- Order history
- Downloads for LUBE-Master and related systems
- See precise stock levels



www.eurolube.com

EUROLUBE ACADEMY

Eurolube is proud to announce the launch of the new Eurolube Academy, a complete product training environment complete with a fully equipped NEX-U-® fluid management system. It's designed to train our distributors and end users in the professional handling and use of Eurolube equipment and installation technology. The training focuses on the environment, safety, economy and practical handling of fluid systems.

Contact us if you are interested in learning more.





EUROLUBE EQUIPMENT

BY ALENTEC & ORION AB

GRUSTAGSVÄGEN 4, 138 40 ÄLTA, SWEDEN

EMAIL eurolube@alentec.se

PHONE **+46 8-747 67 10**



www.eurolube.com

DISTRIBUTED BY: