



EUROLUBE
LUBRICATION EQUIPMENT

NEX-U.® FLUID MANAGEMENT SYSTEM • OIL EQUIPMENT • GREASE EQUIPMENT

WASTE OIL EQUIPMENT • MULTI-FLUID EQUIPMENT • ADBLUE® EQUIPMENT

DIESEL EQUIPMENT • HOSE REELS • DRUM HANDLING • AIR TREATMENT

CATALOGUE 020 EXPORT

 www.eurolube.com

EUROLUBE EQUIPMENT
by Alentec & Orion AB
Grustagsvägen 4, 138 40 Älta, Sweden

EMAIL eurolube@alentec.se
PHONE +46 8-747 67 10

 www.eurolube.com

WELCOME TO EUROLUBE EQUIPMENT

Eurolube is a Swedish brand specializing in the distribution and support of environmentally-friendly products and tailor-made complete and professional solutions for the handling of lubricants and fluids. We provide quality products to partners in more than 40 countries.

Eurolube's greatest strength is our ability to quickly deliver tailor-made solutions. That, simply, is how we contribute to our partners' efficiency and their profitability.

Our vision: Eurolube is dedicated to quality solutions and support for the lubricant and fluid handling sector. We do this by developing, manufacturing and supplying products that pump, measure and dispense lubricants and fluids, and by delivering these solutions to our partners in the most economical and cost-effective manner.

Operation

Eurolube delivers high quality turnkey solutions for professional and environmentally-friendly handling of lubricants and fluids. Our range covers everything from advice to complete customized systems. These include, for example, air-operated pumps and accessories of our own design, and advanced electronic metering and measuring equipment. This means precise control of dosing and flow measurement and, with our NEX-U® fluid management system, easy connection to existing ERP systems. Our aim is to constantly develop our concept of always being able to offer cost effective solutions with cutting edge technology. Eurolube products are used by companies in the automotive workshops, manufacturing, shipping, mining and agriculture sectors.

Commitment and flexibility

We are recognized for our instant support and our comprehensive interpretation of our partners' needs, for fast order acknowledgement and for short lead times. Our expert knowledge of the rules that apply to the installation of equipment, is a strength we pass on to our partners. Reliable lead times, flexibility and total commitment are our trademarks.

The customer is our partner

We always strive for long term business relationships. We therefore feel it is very important for new customers to get to know who we are and how we think just as we always aim to understand our new customers. In plain language, we always invest the time to visit you, to learn about your operation and to establish a person-to person connection. Interested?

Please contact us to find out more about our opportunities for a winning concept.



ISO CERTIFICATION

We are certified according to ISO 9001 and ISO 14001 which is a confirmation that we have an efficient system for management and control over quality and environmental issues.



NEX·U·®	6
NEX·U·® system components	6
OIL EQUIPMENT	18
Air operated pumps	18
Electric oil pumps	28
Hose reels for oil	31
Oil meters and guns	37
Hand operated equipment	40
Oil equipment accessories	42
Measures and funnels	47
GREASE EQUIPMENT	50
Air operated grease pumps	50
Grease pump kits	55
Hose reels for grease	59
Equipment for grease	60
Battery operated grease guns	61
Grease control valves and accessories	62
Drum covers and accessories	62
Grease fittings	66
WASTE OIL EQUIPMENT	72
Waste oil pumps	72
Equipment for pits	72
Mobile waste oil drainers with bowl	74
Waste oil handling	79
MULTI-FLUID EQUIPMENT	82
Air operated multi-fluid pumps	82
Wind screen fl / degreaser	85
Meters and control valves	87
Hand operated equipment	89
Measures and funnels	90
ADBLUE® EQUIPMENT	92
Pumps and kits	92
Hose reels for AdBlue®	93
Nozzles and meters	94
DIESEL EQUIPMENT	98
Diesel pumps	98
Diesel meters	99
Diesel nozzle	100

AIR EQUIPMENT	104
Air treatment	104
Accessories for air	105
HOSE REELS AND ACCESSORIES	108
Hose reels for standard duty	108
Heavy duty hose reels	112
Accessories for hose reels	117
DRUM HANDLING	122
Drum handling	122

NEX·U·®



TYPE
U-net Central processing unit
PART NO.
53802
DATA
Description: U-net is the key NEX-U.® component. It controls all the system functions and manages the wired and wireless communication among the NEX-U.® components. U-net also includes the U-track software and enables DMS-integration. Communication: Ethernet port (RJ45-port), CAN bus, Wireless (U-link)

TYPE
Virtual keypad
PART NO.
53801
DATA
Description: Virtual Keypad license. Converts any terminal (PC, laptop, tablet or smartphone) into a NEX-U.® access Keypad.

TYPE
U-dat system access keypad
PART NO.
1 53821 2 53820
DATA
Voltage: 230 V AC
1 Description: NEX-U.® access keypad with 7" colour screen and QWERTY keypad. Integrated 320W transformer to open a maximum of 8 solenoid valves. Can be used with external RFID-module, printer and barcode reader. Includes integrated RFID-module. Communication: CAN bus
2 Description: NEX-U.® access keypad with 7" colour screen and QWERTY keypad. Integrated 75W transformer to open a maximum of 2 solenoid valves. Can be used with external RFID-module, printer and barcode reader. Includes integrated RFID-module. Communication: CAN bus

TYPE
NEX-U.® Compact
PART NO.
1 53822 2 53823
DATA
Voltage: 230 V AC
1 Description: Enables full control of transactions and stock level of fluids for smaller workshops. A system based in a special U-dat terminal that is able to control a maximum of 2 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX-U.® Compact does not support connection to U-net Pro.
2 Description: Enables full control of transactions and stock level of fluids for smaller workshops. A system based in a special U-dat terminal that is able to control a maximum of 8 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX-U.® Compact does not support connection to U-net Pro.



TYPE	TYPE	TYPE	TYPE
NEX·U.® Mobile	U-vision	U-vision+	U-count
PART NO.	PART NO.	PART NO.	PART NO.
53824	53830	53831	53836
DATA	DATA	DATA	DATA
Voltage: 230 V AC Description: Enables full control of transactions and stock level of fluids for mobile service trucks. A system based in a special U-dat terminal that is able to control a maximum of 8 dispensing points. Ability to export full reports in CSV format to USB. Includes integrated RFID-module. NEX·U.® Mobile does not support connection to U-net Pro.	Description: Hand-held display module to fit an 1/2" control handle. Includes a backlight display to show delivered volume and operation progress. U-vision can be connected to: U-valve, U-meter+, U-count. Communication: Bluetooth®	Description: Hand-held display module with keypad to fit an 1/2" control handle. Ability to start a dispense directly from the hand-held unit. Includes a backlight display to show delivered volume and operation progress. U-vision can be connected to: U-valve, U-meter+, U-count. Communication: Bluetooth®	Description: U-count is used to control 1 solenoid valve and a U-pulser or external pulse meter. LED display that shows the delivered volume and can be connected to U-vision or U-vision+. Communication: CAN bus, Bluetooth®




TYPE
U-view
PART NO.
53835
DATA
Description: Big remote LED display that shows the delivered volume through U-valve, U-meter, U-meter+. Communication: CAN bus

TYPE
U-tank
PART NO.
53829
DATA
Voltage: 230 V AC Description: Real-time inventory control, controlling two tanks using digital or analogical level gauges. Solenoid valves control output for pump control and to external warning devices. Two independent graphic level bars and a display to show the inventory available in each tank. Communication: CAN bus. Solenoid valve output 24V DC, max 2 per port.

TYPE
U-power
PART NO.
1 53826 2 53827 3 53828
DATA
Voltage: 230 V AC 1 Description: Power supply to a maximum of 2 solenoid valves and other system components. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus 2 Description: Power supply to a maximum of 8 solenoid valves and other system components. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus 3 Description: Power supply to a maximum of 8 solenoid valves and other system components. 3 CAN bus connectors for group division on the communication line. U-power can be connected to: U-valve, U-meter, U-meter+, U-count, U-view, U-connect. Communication: CAN bus

TYPE
U-connect
PART NO.
53881
DATA
Description: U-connect allows wireless communication via Wi-Fi among the different components of the system which are connected via CAN bus.

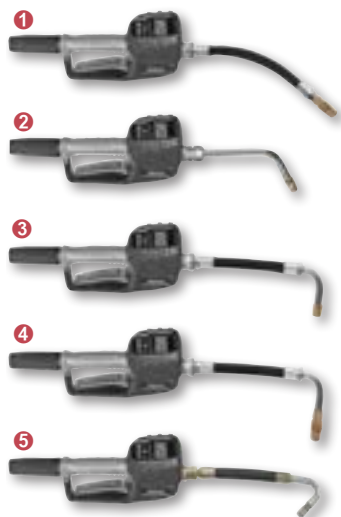

TYPE
U-link wireless hand meter
PART NO.
53803
DATA
Description: Digital hand meter with wireless communication to U-Net. Enables monitoring of transactions via U-track. U-link can be integrated with DMS. Includes integrated solenoid valve and RFID-module. Connection: Wireless

TYPE
U-link with outlet hose
PART NO.
① 10522 ④ 10572 ② 10552 ⑤ 10591 ③ 10571
DATA
Capacity: 1 - 20 l/min free flow Maximum working pressure: 10 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP ① Model: NEX-U.® U-link Wireless digital hand meter with formable hose, manual non-drip nozzle 1/2" (F) BSP Oil/Glycol ② Model: NEX-U.® U-link Wireless digital hand meter with 60° outlet pipe and manual non-drip 1/2" (F) BSP Oil/Glycol ③ Model: NEX-U.® U-link Wireless digital hand meter with 90° hose and automatic non-drip 1/2" (F) BSP Oil/Glycol ④ Model: NEX-U.® U-link Wireless digital hand meter with 90° hose and manual non-drip 1/2" (F) BSP Oil/Glycol ⑤ Model: NEX-U.® U-link Wireless digital hand meter with 135° hose and automatic non-drip 1/2" (F) BSP Oil/Glycol

TYPE
Mobile oil dispenser with U-link wireless hand meter
PART NO.
117-90
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, wireless hose end meter, automatic non-drip nozzle, trolley. Drum NOT included. Maximum air pressure: 1,0 (10) MPa (bar) Pump: B11740

TYPE
NEX-U.® Range extender for U-link
PART NO.
53804
DATA
Description: Used to extend the range between the existing wireless connection between U-link and U-net. Voltage: 230 V AC



TYPE
LUBE-Master Integration
PART NO.
53792
DATA
Description: Software to integrate U-Net and U-link into existing LUBE-Master installations. The integration enables you to initiate a dispense from the regular LUBE-Master terminal and then use the U-link to perform the dispense from, for example, a mobile dispensing unit.

TYPE
U-valve
PART NO.
53850
DATA
Description: Combined pulse meter, solenoid valve, screen filter with the electronics required to control the meter. Big LED display showing the dispense point number and delivered volume. Can be connected to U-vision or U-vision+. Communication: CAN bus, Bluetooth®
Connection: 1/2" (F)-(F) BSP

TYPE
U-meter
PART NO.
1 53860 2 53866 3 53862 4 53864
DATA
1 Model: NEX-U.® U-meter Flow meter aluminium 1/2"
Connection: 1/2" (F) BSP
2 Model: NEX-U.® U-meter Flow meter aluminium 3/4"
Connection: 3/4" (F) BSP
3 Model: NEX-U.® U-meter Flow meter PVC, 1/2"
Connection: 1/2" (F) BSP
4 Model: NEX-U.® U-meter Flow meter Stainless steel 1/2"
Connection: 1/2" (F) BSP

TYPE
U-meter+ with Bluetooth®
PART NO.
1 53861 2 53863 3 53865
DATA
1 Model: NEX-U.® U-meter+ Flow meter aluminium 1/2" with Bluetooth®
Connection: 1/2" (F) BSP
2 Model: NEX-U.® U-meter+ Flow meter PVC, 1/2" with Bluetooth®
Connection: 1/2" (F) BSP
3 Model: NEX-U.® U-meter+ Flow meter Stainless steel 1/2" with Bluetooth®
Connection: 1/2" (F) BSP



TYPE
U-pulser aluminium
PART NO.
1 1168813 2 1168816 3 53868
DATA
Media: Oil/Glycol Accuracy: 0,5 % ± Material: Aluminium 1 Capacity: 1-30 l/min free flow Maximum working pressure: 6,0 (60) MPa (bar) PPU: 328 Connection: 1/2" (F) BSP 2 Capacity: 8-80 l/min free flow Maximum working pressure: 6,0 (60) MPa (bar) PPU: 109 Connection: 3/4" (F) BSP 3 Capacity: 10 - 80 l/min free flow Maximum working pressure: 10 (100) MPa (bar) PPU: 110 Connection: 1" (F) BSP

TYPE
U-pulser stainless steel / PVC
PART NO.
1 1168814 2 1168815
DATA
Accuracy: 0,5 % ± Connection: 1/2" (F) BSP 1 Media: Windscreen fluid/AdBlue®/Fluids Capacity: 1-50 l/min free flow Maximum working pressure: 6 (60) MPa (bar) PPU: 320 Seals: FKM / Viton® Material: Stainless steel 2 Media: Windscreen fluid/AdBlue®/Fluids Capacity: 1-50 l/min free flow Maximum working pressure: 3,0 (30) MPa (bar) PPU: 320 Seals: FKM / Viton® Material: PVC

TYPE
U-meter complete meter unit
PART NO.
1 53870 4 53875 2 53872 5 53877 3 53874
DATA
Voltage: 24 V DC 1 Media: Oil/Glycol Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP 2 Media: Oil/Glycol Maximum pressure: 6 (60) MPa (bar) Connection: 3/4" (M)-(M) BSP 3 Media: Oil/Diesel Maximum pressure: 1 (10) MPa (bar) Connection: 3/4" (M)-(M) BSP 4 Media: AdBlue® Maximum pressure: 1 (10) MPa (bar) Connection: 1/2" (M)-(M) BSP 5 Media: Windscreen fluid Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP

TYPE
U-meter+ complete meter unit with Bluetooth®
PART NO.
1 53871 2 53876 3 53878
DATA
Voltage: 24 V DC 1 Media: Oil/Glycol Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP 2 Media: AdBlue® Maximum pressure: 1 (10) MPa (bar) Connection: 1/2" (M)-(M) BSP 3 Media: Windscreen fluid Maximum pressure: 5 (50) MPa (bar) Connection: 1/2" (M)-(M) BSP




TYPE
Solenoid valves for fluids
PART NO.
1 1168574
2 1168964
3 1168980
DATA
Voltage: 24 V DC
1 Media: Various
Maximum pressure: 5 (50) MPa (bar)
Material: Brass
Connection: 1/2" (F)-(F) BSP
2 Media: Various
Maximum pressure: 6 (60) MPa (bar)
Material: Brass
Connection: 1" (F)-(F) BSP
3 Media: Diesel
Maximum pressure: 1 (10) MPa (bar)
Material: Brass
Connection: 3/4" (F) BSP

TYPE
Solenoid valve for waste oil
PART NO.
1168985
DATA
Media: Waste oil
Air connection: 1/4" (F) BSP
Maximum air pressure: max 0,1-0,4 (1-4) MPa (bar)
Maximum working pressure: 1 (10) MPa (bar)
Voltage: 24 V DC
Material: Brass
Connection: 1 1/2" (F) BSP

TYPE
Solenoid valve for AdBlue®
PART NO.
1168578
DATA
Media: AdBlue®
Maximum pressure: 1 (10) MPa (bar)
Material: Stainless steel
Connection: 1/2" (F)-(F) BSP

TYPE
Solenoid valves for air
PART NO.
1 3368514
2 3318791
3 3318795
DATA
1 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC
Connection: 1/4" (F)-(F) BSP
2 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC
Connection: 1/2" (F)-(F) BSP
3 Maximum pressure: 1,5 (15) MPa (bar)
Voltage: 24 V DC/ V AC
Connection: 1/4" (F)-(F) BSP

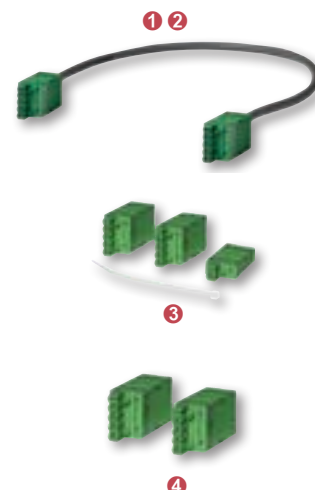


TYPE
Power supply unit with relay for waste oil pumps
PART NO.
53197
DATA
Model: Power supply unit with relay for waste oil pumps, enclosed 24VDC 5A - 230V, used when there are more than 2 waste oil solenoid valves in the system.

TYPE
Mounting bracket for U-valve
PART NO.
53882
DATA
Description: Allow fixing U-valve on top of a hose reel stand.

TYPE
Cables
PART NO.
1 53890 4 53890-125 2 53890-25 5 53890-250 3 53890-50
DATA
1 Model: NEX·U.® CAN bus cable 2 Model: NEX·U.® CAN bus cable, 25 meter roll 3 Model: NEX·U.® CAN bus cable, 50 meter roll 4 Model: NEX·U.® CAN bus cable, 125 meter drum 5 Model: NEX·U.® CAN bus cable, 250 meter drum

TYPE
Jumper cables
PART NO.
1 53892 3 53891 2 53893 4 53886
DATA
1 Model: NEX·U.® CAN bus jumper cable 0,5m 2 Model: NEX·U.® CAN bus jumper cable 1,0m 3 Model: NEX·U.® U-meter Connectors set 4 Model: NEX·U.® U-Valve Connectors set



TYPE
Signal cable
PART NO.
1 53393-50 2 53393-100
DATA
1 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum. Cable length: 50 m 2 Description: Signal cable connects pulse meters, solenoid valves and level sensors. By using the correct, high quality cable from Eurolube Equipment, system reliability is kept to a maximum. Cable length: 100 m

TYPE
Tank alarm
PART NO.
53883
DATA
Model: NEX-U.® Remote flash and acoustic alarm

TYPE
Level switch, stop level
PART NO.
1 53171 2 53183 3 53287
DATA
1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1 stop level. 1080mm. Media: Oil Thread: 3/4" (M) BSP 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. 1 stop level. Max height: 1080mm. Media: Windscreen fluid Thread: 3/4" (M) BSP 3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Cable: 5000 mm. Connection: 2" BSP (M). Media: Oil Thread: 2" (M) BSP

TYPE
Level switch, stop and alarm levels
PART NO.
1 53191 2 53192 3 53193
DATA
1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 208 l drum or IBC container. Max height: 1080mm. 2 levels, alarm and stop level. Media: Oil Thread: 3/4" (M) BSP 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for 200l drum or IBC container. EX IA barrier part no. 53187 is required when used with flammable fluids. Max height: 1080mm. 2 levels, alarm and stop level. Media: Windscreen fluid Thread: 3/4" (M) BSP 3 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. Two levels, alarm & stop. Max height 2000 mm. Media: Oil/Glycol Thread: 1" (M) BSP



TYPE
High level switch
PART NO.
1 53132 2 53154
DATA
Thread: 2" (M) BSP 1 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required in use of flammable fluids. Stop level: 150 mm Alarm level: 300 mm 2 Description: Used with LUBE-Master modules 53408, 53430 or NEX-U U-tank. This model is for waste oil tanks. EX IA barrier part no. 53187 is required when used with flammable fluids. Stop level: 300 mm Alarm level: 450 mm

TYPE
Analogue tank level gauge
PART NO.
1 53417 2 53417-1 3 53437
DATA
1 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For tanks up to 4 m height. 5m cable included. Media: Oil Type: Tank <4 m 2 Description: Real time measuring of tank levels, can only be used with tank module 53408 / 53829. For drums or IBC, <1 m. 5m cable included. Media: Oil Type: Tank <1 m 3 Description: 4-20 mA level sensor for tanks up to 3,5 m height. Self calibrated against the surrounding air pressure. To be connected to tank module 53408 / 53829. Media: Windscreen fluid Type: Tank <3,5 m

NOTES

NOTES

Oil equipment

Air operated pumps	18
Electric oil pumps	28
Hose reels for oil	31
Oil meters and guns	37
Hand operated equipment	40
Oil equipment accessories	42
Measures and funnels	47

AIR OPERATED PUMPS

AIR OPERATED PUMPS

C50-Series



TYPE
1:1 Transfer pumps
PART NO.
1 B11740
2 B11741
DATA
Ratio: 1:1
Capacity: 40 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
1 Pump tube: 52 (917) Ø (length) mm
2 Pump tube: 52 (212) Ø (length) mm

TYPE
1:1 Transfer pump for diesel
PART NO.
117-08
DATA
Description: Complete air operated pump to dispense light oils and diesel. Quiet and double acting operation and easy to fit to drum. Included 2" drum adapter, 1:1 pump B11740, 3m x 3/4" hose and control valve.
Maximum air pressure: 1 (10) MPa (bar)

TYPE
1:1 Wall pump drum & IBC
PART NO.
117-02
DATA
Description: Complete air operated pump to dispense light lubricating oils in short piped systems. Quiet and double acting operation and easy to fit to drum or IBC tanks, seals in NBR/PU. Max air pr.: 1.0 MPa (150 psi).
Includes: 1:1 Pump B11741 Wall bracket 1/4" Filter regulator 1,5 m Air line hose 2 m Hose for oil 3/4" Ball valve 1,08 m suction tube c.w. 2 m suction hose.

TYPE
1:1 Mobile oil dispenser for 208 l drum
PART NO.
137-46
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, automatic non-drip nozzle, trolley. Drum NOT included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740

AIR OPERATED PUMPS

AIR OPERATED PUMPS



C50-Series



TYPE
1:1 Drump pump kit for 208 l drum
PART NO.
117-01
DATA
Description: Complete air operated pump to dispense lubricating oils. Quiet and double acting operation and easy to fit to drum. Includes 2" drum adapter, 1/4" filter regulator, 1,5 m air line hose, 1,5 m hose for oil, 3/4" ball valve.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740
Seals: NBR/PU

TYPE
1:1 Mobile oil dispenser with U-link wireless hand meter
PART NO.
117-90
DATA
Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, wireless hose end meter, automatic non-drip nozzle, trolley. Drum NOT included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B11740

TYPE
1:1 Oil dispenser with safety trolley
PART NO.
137-57
DATA
Description: Consists of drum trolley 16860, pump B11740, 3 m hose and hose end meter 10371. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

TYPE
3:1 Pump for drum
PART NO.
① B13760 ② B13762
DATA
① Ratio: 3:1
Capacity: 22 l/min free flow
For container: 208 l Drum
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Pump tube: 34 (915) Ø (length) mm
Seals: NBR/PU
② Ratio: 3:1
Capacity: 22 l/min free flow
For container: 60 l Drum
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Pump tube: 34 (707) Ø (length) mm
Seals: NBR/PU

AIR OPERATED PUMPS

AIR OPERATED PUMPS

C50-Series



C115-Series



TYPE
3:1 Pump stub
PART NO.
B13761
DATA
Ratio: 3:1
Capacity: 22 l/min free flow
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 3/4" (F) BSP
Outlet: 3/4" (F) BSPT
Pump tube: 34 (209) Ø (length) mm
Seals: NBR/PU

TYPE
3:1 H.V. Pump stub
PART NO.
13770
DATA
Ratio: 3:1
Capacity: 120 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 90 (200) Ø (length) mm
Seals: NBR/PU

TYPE
3:1 Drum pump with oil gun
PART NO.
137-11
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m

TYPE
3:1 Drum pump with digital meter
PART NO.
1 137-12 2 137-12EF
DATA
1 Model: 3:1 Pump kit 208 l drum, complete with digital hose end meter
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m
Meter: 10372
2 Model: 3:1 Pump kit 208 l drum with approvable meter
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m
Meter: 16717

AIR OPERATED PUMPS

AIR OPERATED PUMPS



TYPE
3:1 Drum pump with mechanical meter
PART NO.
137-19
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m
Meter: 16719

TYPE
3:1 Drum pump with mechanical pre-set meter
PART NO.
137-27
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum, 2" drum adapter included.
Dimension: 12,5 (1/2") mm (inch)
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Hose length: 3 m
Meter: 16716

TYPE
3:1 Drum pump for 208 l drum
PART NO.
137-01
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets. Quiet and double acting operation and easy to fit to drum. Includes 2" drum adapter, 1/4" filter regulator, 1,5 m air line hose, 2 m hose for oil, 3/4" ball valve.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
Seals: NBR/PU

TYPE
3:1 Wall pump drum & IBC
PART NO.
137-02
DATA
Description: Complete air operated pump to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets. Quiet and double acting operation and easy to fit to drum or IBC tank. Includes: wall bracket, 1/4" filter regulator, 1,5 m air line hose, 2 m hose for oil, 3/4 ball valve, 1 m suction tube c.w. 2 m suction hose.
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
Seals: NBR/PU



TYPE
3:1 Wall pump kit for tank
PART NO.
137-03
DATA
Description: Air operated pump designed to dispense lubricating oils and similar products up to SAE 90 in piped systems. Maximum recommended simultaneous use up to 3 outlets. Quiet and double acting operation and easy to fit to drum or tank, 2" drum adapter included, seals in NBR/PU. Max air pr.: 1.0 MPa (150 psi). Includes: wall bracket, 1/4" filter regulator, 1,5 m air line hose, 2 pcs hoses for oil, 2 pcs ball valves. Maximum air pressure: 1,0 (10) MPa (bar) Pump: B13761 Seals: NBR/PU

TYPE
3:1 Drum pump kit with hose reel
PART NO.
1 137-04 2 137-05
DATA
Maximum air pressure: 1,0 (10) MPa (bar) Seals: NBR/PU 1 Description: Complete pump kit to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum. Includes: 2" drum adapter, 1/4" filter regulator, 1,5m air line hose, S10 hose reel, digital meter. For container: 208 l Drum Pump: B13760 2 Description: Complete pump kit to dispense lubricating oils and similar products up to SAE 90. Quiet and double acting operation and easy to fit to drum. Includes: 2" drum adapter, 1/4" filter regulator, 1,5m air line hose, S10 hose reel, digital meter. For container: 60 l Drum Pump: B13762

TYPE
3:1 Oil dispenser with safety trolley standard
PART NO.
137-60
DATA
Description: Consists of an oil pump B13760, hose reel 10 m 17852 with hose end meter 10371 and drum trolley 16860. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

TYPE
3:1 Oil dispenser with HD safety trolley, pneumatic tyres
PART NO.
137-61
DATA
Description: Consists of pump B13760, hose reel (17852) with hose end meter 10371 and trolley 16861. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.

AIR OPERATED PUMPS

AIR OPERATED PUMPS



E80-Series



E80-Series



C80-Series



TYPE	TYPE	TYPE	TYPE
3:1 Oil dispenser with HD safety trolley, solid tyres	5:1 Pump for drum	5:1 Pump stub	5:1 H.V. Pump for drum
PART NO.	PART NO.	PART NO.	PART NO.
137-62	15830	15831	15735
DATA	DATA	DATA	DATA
Description: Consists of pump B13760, hose reel (17852) with measuring plant 10371 and trolley 16862. The drum is placed on an safety trolley which prevents any spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. Perfect for field service in construction, mining and marine sectors and other sensitive environments.	Ratio: 5:1 Air connection: 1/4" (F) BSP Maximum air pressure: 1,0 (10) MPa (bar) Inlet: - Outlet: 3/4" (F) BSP Pump tube: 52 (910) Ø (length) mm	Ratio: 5:1 Air connection: 1/4" (F) BSP Maximum air pressure: 1,0 (10) MPa (bar) Inlet: 1" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 52 (230) Ø (length) mm	Ratio: 5:1 Capacity: 30 l/min free flow Air connection: 3/8" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Outlet: 1/2" (F) BSP Pump: 208 l Drum Pump tube: 925 mm Length: 1194 mm

C80-Series



TYPE
5:1 H.V. Pump stub
PART NO.
15736
DATA
Ratio: 5:1
Capacity: 30 l/min free flow
Air connection: 3/8" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Pump: Stub
Pump tube: 52 (200) Ø (length) mm
Length: 469 mm

C115-Series



TYPE
6:1 H.V. Pump stub
PART NO.
15755
DATA
Ratio: 6:1
Capacity: 100 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 70 (200) Ø (length) mm

C150-Series



TYPE
6:1 H.V. Pump stub
PART NO.
15756
DATA
Ratio: 6:1
Capacity: 100 l/min free flow
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,2 (12) MPa (bar)
Inlet: 1 1/2" (F) BSP
Outlet: 3/4" (F) BSP
Pump tube: 90 (200) Ø (length) mm



TYPE
5:1 Wall pump kit for tank
PART NO.
157-03
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: 15831
Seals: NBR/PU

AIR OPERATED PUMPS

AIR OPERATED PUMPS



C150-Series



C115-Series



C115-Series



TYPE
5:1 Wall pump for drum & IBC
PART NO.
157-04
DATA
Maximum air pressure: 1,0 (10) MPa (bar) Pump: 15831 Seals: NBR/PU

TYPE
12:1 Pump stub
PART NO.
15767
DATA
Ratio: 12:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: 1 1/2" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 70 (198) Ø (length) mm

TYPE
10:1 Pump for drum
PART NO.
15765
DATA
Ratio: 10:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: - Outlet: 3/4" (F) BSP Pump tube: 54 (855) Ø (length) mm

TYPE
10:1 Stub pump
PART NO.
15766
DATA
Ratio: 10:1 Capacity: 65 l/min free flow Air connection: 1/2" (F) BSP Maximum air pressure: 1,2 (12) MPa (bar) Inlet: 1 1/2" (F) BSP Outlet: 3/4" (F) BSP Pump tube: 54 (200) Ø (length) mm

AIR OPERATED PUMPS

AIR OPERATED PUMPS

E80-Series



TYPE
15:1 Pumps
PART NO.
1 15740
2 15741
DATA
Ratio: 15:1
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Seals: PU / NBR
1 Pump tube: 32 (910) Ø (length) mm
2 Pump tube: 32 (235) Ø (length) mm

TYPE
Mobile oil dispenser for 60 l drum
PART NO.
1 137-13
2 137-14
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13762
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun, trolley. Drum NOT included.
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun with digital meter, trolley. Drum NOT included.

TYPE
Mobile oil dispenser w/ 65 l tank
PART NO.
1 137-17
2 137-18
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13762
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun, mobile 65 l tank
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3m x 1/2" hose, oil gun with digital meter, mobile 65 l tank

TYPE
3:1 Pump kit for 1.000 l IBC
PART NO.
1 137-09
2 137-10
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 6 m x 1/2" hose, oil gun, suction hose, pump bracket. IBC container NOT included.
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 6 m x 1/2" hose, oil gun with digital meter, suction hose, pump bracket. IBC container NOT included.

AIR OPERATED PUMPS

AIR OPERATED PUMPS



TYPE
3:1 Pump kit for 1.000 l IBC
PART NO.
1 137-25 2 137-26
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13761
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: S10 hose reel, oil gun, suction hose, IBC bracket. IBC container NOT included.
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: S10 hose reel, oil gun with digital meter, suction hose, IBC bracket. IBC container NOT included.

TYPE
5:1 Pump kit for 1.000 l IBC
PART NO.
1 157-25 2 157-26
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 5:1 oil pump, S15 hose reel, oil gun, suction hose, IBC bracket. IBC container NOT included.
2 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 5:1 oil pump, S15 hose reel, oil gun with digital meter, suction hose, IBC bracket. IBC container NOT included.

TYPE
Mobile dispenser for 208 l drum
PART NO.
1 137-15 2 137-16 3 137-46
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3:1 oil pump, 3m x 1/2" hose, oil gun with manual non drip nozzle, trolley. Drum NOT included.
Pump: B13760
2 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 3:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, manual non drip nozzle, trolley. Drum NOT included.
3 Description: Mobile oil pump kit designed to meet any needs of effective oil dispensing. Includes: 1:1 oil pump, 3m x 1/2" hose, oil gun with digital meter, automatic non-drip nozzle, trolley. Drum NOT included.
Pump: B11740

TYPE
Mobile dispenser for 208 l drum
PART NO.
1 137-23 2 137-24
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
Pump: B13760
1 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 3:1 oil pump, S10 hose reel, oil gun, trolley. Drum NOT included.
2 Description: Oil pump kit designed to meet any needs for effective oil dispensing. Includes: 3:1 oil pump, S10 hose reel, oil gun with digital meter, trolley. Drum NOT included.



TYPE
Portable electric oil pumps
PART NO.
1 61012
2 61024
DATA
Capacity: 5,5 l/min free flow
Inlet: 3/4" (F) BSPT
Outlet: 1/2" (F) BSPT
IP: 55
Max suction height: 2,5 m
1 Voltage: 12 V DC
2 Voltage: 24 V DC

TYPE
Electric oil pumps 1,0 MPa
PART NO.
1 60100
2 60110
DATA
Capacity: 9 l/min free flow
Inlet: 3/4" (F) BSPT
Maximum working pressure: 1,0 (10) MPa (bar)
Voltage: 230 V AC
IP: 55
1 Outlet: 3/4" (F) BSPT
Motor: 600 W
Pressure switch: No
2 Outlet: 1" (F) BSPT
Motor: 600 W
Pressure switch: Yes

TYPE
Electric oil pumps 2,4 MPa
PART NO.
1 60300
2 60310
DATA
Capacity: 10 l/min free flow
Inlet: 3/4" (F) BSPT
Maximum working pressure: 2,4 (24) MPa (bar)
Voltage: 230 V AC
IP: 55
1 Outlet: 3/4" (F) BSPT
Motor: 600 W
Pressure switch: No
2 Outlet: 1" (F) BSPT
Motor: 780 W
Pressure switch: Yes

TYPE
Electric oil pumps HD
PART NO.
1 61614
2 61611
DATA
Inlet: 1" (F) BSPT
Outlet: 1" (F) BSPT
Maximum working pressure: 0,8 (8,0) MPa (bar)
1 Capacity: 50 l/min free flow
Motor: 1500 W
2 Capacity: 70 l/min free flow
Motor: 2000 W

ELECTRIC OIL PUMPS

ELECTRIC OIL PUMPS



TYPE	TYPE	TYPE	TYPE
Oil pump kit for 208 l drum	Oil pump kit for Schütz-tanks	Oil pump kit for Schütz-tanks	Oil pump kit for Schütz-tanks
PART NO.	PART NO.	PART NO.	PART NO.
62020	62021	62010	62011
DATA	DATA	DATA	DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, suction tube, 2m outlet hose.	Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, 2m outlet hose.	Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, 4m outlet hose, digital meter, drip holster.	Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Electronic control unit stops the pump automatically when control valve is closed and starts also automatically when control valve is opened again. Start pressure: 6 bar, stop pressure: 24 bar. Includes: oil pump, tank connection, outlet hose, oil bar.
Capacity: 10 l/min free flow	Capacity: 10 l/min free flow	Capacity: 9 l/min free flow	Capacity: 9 l/min free flow
Maximum working pressure: 2,4 (24) MPa (bar)	Maximum working pressure: 2,4 (24) MPa (bar)	Maximum working pressure: 1,0 (10) MPa (bar)	Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 780 W	Motor: 780 W	Motor: 600 W	Motor: 600 W
Voltage: 230 V AC	Voltage: 230 V AC	Voltage: 230 V AC	Voltage: 230 V AC
IP: 44	IP: 44	IP: 44	IP: 44



TYPE
Oil pump kit for 208 l drum
PART NO.
1 61013 2 61025
DATA
Capacity: 4 l/min free flow
Maximum working pressure: 0,9 (9,0) MPa (bar)
1 Motor: 200 W
Voltage: 12 V DC
2 Motor: 200 W
Voltage: 24 V DC

TYPE
Mobile oil dispenser for 208 l drum
PART NO.
62100
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Includes: oil pump, suction hose, 3m hose, digital meter, trolley for 200l drum.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC

TYPE
Oil pump kit for 208 l drum or IBC
PART NO.
62000
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body. Includes: oil pump, suction hose, 3m hose, digital meter.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC

TYPE
Oil pump kit for 208 l drum or IBC
PART NO.
62001
DATA
Description: Ideal solution when compressed air is not available. Self priming gear type pump, sintered precision gears and cast iron body with integrated adjustable by-pass valve in the pump body as well as a pressure switch that shuts off the pump when the outlet valve is closed. Includes: oil pump, pressure switch, suction hose, 3m hose, digital meter.
Capacity: 9 l/min free flow
Maximum working pressure: 1,0 (10) MPa (bar)
Motor: 600 W
Voltage: 230 V AC

HOSE REELS FOR OIL

HOSE REELS FOR OIL

S10/S15-Series



S10/S15-Series



S10/S15-Series



S10/S15-Series



TYPE
S10 & S15 hose reels
PART NO.
1 17820 2 17837
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 7,5 (75) MPa (bar) 1 Hose length: 10 m Connection: 1/2" - 1/2" (F)-(M) BSP 2 Hose length: 15 m Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Reel kit with oil control gun
PART NO.
1 317-12 2 317-13
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve (10377). 2 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with digital meter
PART NO.
1 317-14 3 317-14EF 2 317-15 4 317-15EF
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve with digital meter (10372). 2 Description: Includes: hose reel S15 15m, strainer, ball valve, oil control valve with digital meter. 3 Description: Includes: hose reel S10, strainer, ball valve, oil control valve with approved digital meter. 4 Description: Includes: hose reel S15, strainer, ball valve, oil control valve with approved digital meter.

TYPE
Reel kit with mechanical meter
PART NO.
1 317-20 2 317-19 3 317-11
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel S10 10m (17820), strainer, ball valve, oil control valve with mechanical meter (16719). 2 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve with mechanical meter (16719). 3 Description: Includes: hose reel S15 15m (17837), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).



C15-Series



C15-Series



C15-Series



C15-Series

TYPE
C15 hose reel
PART NO.
1 17844
2 17840
3 17843
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 15 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP
2 Hose length: 10 m
Connection: 1/2" - 1/2" (F)-(M) BSP
3 Hose length: 15 m
Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Reel kit with oil control gun
PART NO.
1 317-01
2 317-25
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve (10377).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with digital meter
PART NO.
1 317-03
2 317-26
DATA
Maximum working pressure: 7,5 (75) l/revolution
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve with digital meter (10372).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with digital meter (10372).

TYPE
Reel kit with mechanical meter
PART NO.
1 317-04
2 317-27
3 317-28
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel C15 10m (17840), strainer, ball valve, oil control valve with mechanical meter (16719).
2 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with mechanical meter (16719).
3 Description: Includes: hose reel C15 15m (17843), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

HOSE REELS FOR OIL

HOSE REELS FOR OIL

CC15-Series



CC15-Series



CC15-Series



CC15-Series



TYPE
CC15 hose reel
PART NO.
1 17852 2 17853
DATA
Dimension: 12,5 (1/2") mm (inch) Maximum pressure: 10 (100) MPa (bar) Connection: 1/2" - 1/2" (F)-(M) BSP 1 Hose length: 10 m 2 Hose length: 15 m

TYPE
Reel kit with oil control gun
PART NO.
1 316-12 2 316-13
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve (10377) 2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve (10377)

TYPE
Reel kit with digital meter
PART NO.
1 316-14 2 316-15
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve with digital meter (10372) 2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve with digital meter (10372)

TYPE
Reel kit with mechanical meter
PART NO.
1 316-20 2 316-19
DATA
Maximum working pressure: 7,5 (75) MPa (bar) 1 Description: Includes: hose reel CC15 10m (17852), strainer, ball valve, oil control valve with mechanical meter (16719) 2 Description: Includes: hose reel CC15 15m (17853), strainer, ball valve, oil control valve with mechanical meter (16719)



T15-Series



T15-Series



T15-Series



T15-Series

TYPE
T15 hose reel
PART NO.
1 17833
2 17832
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

TYPE
Reel kit with oil control gun
PART NO.
317-05
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with digital meter
PART NO.
317-06
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with digital meter (10372).

TYPE
Reel kit with mechanical meter
PART NO.
1 317-07
2 317-08
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with mechanical meter (16719).
2 Description: Includes: hose reel T15 15m (17832), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

HOSE REELS FOR OIL

HOSE REELS FOR OIL

T20-Series



T20-Series



T20-Series



T20-Series



TYPE
T20 hose reel
PART NO.
1 37845 2 17834 3 17836
DATA
Dimension: 12,5 (1/2") mm (inch)
1 Hose length: 20 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP
2 Hose length: 20 m
Connection: 1/2" - 1/2" (F)-(M) BSP
3 Hose length: 15 m
Connection: 3/4" -3/4" (F)-(M) BSP

TYPE
Reel kit with oil gun
PART NO.
317-21
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T20 20m 1/2" (17834), strainer, ball valve, oil control valve (10377).

TYPE
Reel kit with with H.V. oil gun
PART NO.
317-22
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
Description: Includes: hose reel T20 15m 3/4" (17836), strainer, ball valve, H.V oil control valve (16724).

TYPE
Reel kit with meter
PART NO.
1 317-23 2 317-09 3 317-10
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, H.V oil control valve with digital meter (16813).
2 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, oil control valve with mechanical meter (16719).
3 Description: Includes: hose reel T20 20m (17834), strainer, ball valve, oil control valve with pre-set mechanical meter (16716).

T30-Series



T30-Series



T30-Series



F15-Series



TYPE
T30-series
PART NO.
1 17878
2 17879
3 17880
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 30 m max (without hose)
Connection: 3/4" - 1" (M)-(M) BSP
2 Hose length: 30 m max (without hose)
Connection: 1" - 1" (M)-(M) BSP
3 Hose length: 30 m
Connection: 1/2" - 1/2" (M)-(M) BSP


TYPE
T30-series
PART NO.
17881
DATA
Media: Oil/Diesel
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 25 m
Connection: 3/4" - 3/4" (F)-(M) BSP

TYPE
T30-series
PART NO.
17882
DATA
Media: Oil/Diesel
Dimension: 25,4 (1") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP

TYPE
F15-series
PART NO.
17885
DATA
Media: Oil/Diesel
Dimension: 38,1 (1 1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1 1/2" - 1 1/2" (M)-(M) BSP

OIL METERS AND GUNS

OIL METERS AND GUNS

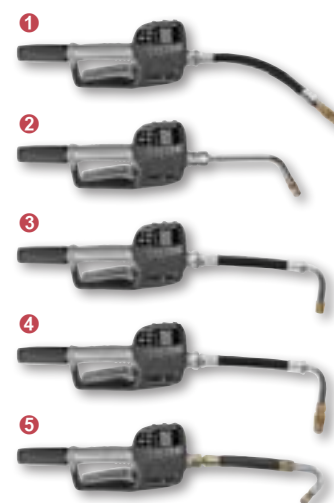

TYPE
Mechanical hose end meter
PART NO.
1 16716 2 16719
DATA
Maximum working pressure: 7,0 (70) MPa (bar) Accuracy: 0,65 % ± Pre-set: 0,25 - 60 l Connection: 1/2" (F) BSP 1 Model: Pre-set mechanical meter for oil 1/2" (F) BSP Capacity: 20 l/min free flow 2 Model: Mechanical hand meter for oil 1/2" (F) BSP Capacity: 30 l/min free flow

TYPE
Hose end meter
PART NO.
10371
DATA
Model: Digital hand meter 90° hose auto- matic non-drip Capacity: 30 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP

TYPE
Hose end meter
PART NO.
1 10372 2 10391
DATA
Capacity: 30 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Accuracy: 0,5 % ± Connection: 1/2" (F) BSP 1 Model: Digital hand meter 90° hose ma- nual non-drip 2 Model: Digital hand meter 135° hose automatic non-drip

TYPE
Pre-set hose end meter
PART NO.
1 10422 4 10472 2 10452 5 10491 3 10471
DATA
Media: Oil/Glycol Capacity: 0,8-30 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Connection: 1/2" (F) BSP 1 Model: Preset digital hand meter with adjustable outlet hose 2 Model: Preset digital hand meter 60° out- let pipe and manual non-drip 3 Model: Preset digital hand meter 90° out- let hose and automatic non-drip 4 Model: Preset digital hand meter 90° out- let hose and manual non-drip 5 Model: Preset digital hand meter 135° outlet hose and automatic non- drip

OIL METERS AND GUNS

OIL METERS AND GUNS



TYPE
H.V. Hose end meter
PART NO.
1 16813 2 16818
DATA
Capacity: 70 l/min free flow
Maximum working pressure: 10 (100) MPa (bar)
Accuracy: 0,5 % ±
1 Model: High volume electronic meter for oil, 60° outlet tube with manual non-drip nozzle 3/4" (F) BSP
2 Model: High volume electronic meter for oil, outlet hose with manual non-drip nozzle 3/4" (F) BSP

TYPE
In-line meter
PART NO.
1168817
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 10,0 (100) MPa (bar)
Voltage: 2x AAA 1,5 V DC
Accuracy: 0,5 % ±
Connection: 1/2" (F)-(F) BSP

TYPE
In-line meter
PART NO.
1168820
DATA
Capacity: 80 l/min free flow
Maximum pressure: 7 (70) MPa (bar)
Voltage: 2x AAA 1,5 V DC
Accuracy: 0,5 % ±
Connection: 3/4" (F)-(F) BSP

TYPE
Oil control gun w/ sight glass
PART NO.
10336EF
DATA
Capacity: 40 l/min free flow
Maximum working pressure: 10 (100) MPa (bar)
Connection: 1/2" (F) BSP

OIL METERS AND GUNS

OIL METERS AND GUNS



TYPE
Oil control gun
PART NO.
1 10305 2 10336
DATA
Capacity: 40 l/min free flow Outlet: 1/2" (F) BSP Maximum working pressure: 10,0 (100) MPa (bar) Connection: 1/2" (F) BSP 1 Model: Oil control gun without outlet 2 Model: Oil control valve with 60° pipe, automatic non-drip


TYPE
Oil control gun
PART NO.
1 10377 2 10376 3 10396
DATA
Capacity: 40 l/min free flow Maximum working pressure: 10,0 (100) MPa (bar) Connection: 1/2 (F) BSP 1 Model: Oil control gun with 90° flexible outlet, manual non-drip 2 Model: Oil control valve 90° automatic non-drip 3 Model: Oil control gun, 135° flexible outlet with automatic non-drip nozzle

TYPE
H.V. Control gun
PART NO.
1 16724 2 16721
DATA
Capacity: 70 l/min free flow Maximum working pressure: 10 (100) MPa (bar) Connection: 3/4" (F) BSP 1 Model: High volume oil control gun with 30° pipe, manual non-drip 2 Model: High volume oil control gun with flexible outlet, manual non-drip

TYPE
Oil bar
PART NO.
1 16755 2 16703 3 16708
DATA
Connection: 1/2" (F) BSP 1 Model: Oil bar with one valve 2 Model: Outlet valve for oil bar 16755 3 Model: Oil bar valve stainless steel



TYPE
Nozzles
PART NO.
1 1167431 3 1169340 2 1169350 4 1169360
DATA
1 Model: Automatic non-drip nozzle M12x1 mm
2 Model: Automatic non-drip nozzle 1/4" (F) BSP
3 Model: Non-drip nozzle manual 1/4" (F) BSP
4 Model: Colour coded protectors for outlet hoses, kit of 4

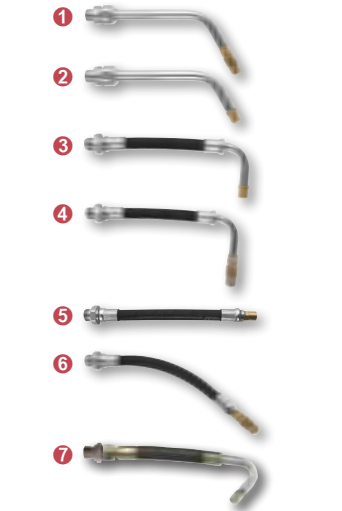

TYPE
Outlet hose with non-drip nozzle
PART NO.
1 1168683 5 1168595 2 1167744 6 1168686 3 1168684 7 1167783 4 1168591
DATA
Connection: 1/2" (M) BSP
1 Model: Rigid outlet 60° with manual non-drip
2 Model: Outlet tube 60° with automatic non-drip
3 Model: Outlet hose 90° with automatic non-drip
4 Model: Outlet hose 90° with manual non-drip
5 Model: Outlet hose straight with automatic non-drip
6 Model: Outlet hose formable with manual non-drip nozzle
7 Model: Outlet hose 135° with automatic non-drip



TYPE
Drum pump with telescopic suction tube
PART NO.
10720
DATA
Description: Hand operated pump for oil and diesel. Telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids.
Capacity: 0,45 l/stroke
For container: 60-208 l



TYPE
Drum pump with outlet hose and spout 60-208 l
PART NO.
1 16780 2 16789
DATA
Capacity: 0,1 l/stroke
1 Description: Hand operated pump for gear oil. 2" drum adaptor, 1,5m outlet hose with ball valve and 135° spout included. Do not use with flammable or corrosive fluids.
For container: 208 l
2 Description: Hand operated pump for gear oil. 2" drum adaptor, 1,5m outlet hose with ball valve and 135° spout included. Do not use with flammable or corrosive fluids.
For container: 60 l

HAND OPERATED EQUIPMENT

HAND OPERATED EQUIPMENT



TYPE
Drum pump 60-208 l
PART NO.
11645
DATA
Description: Hand operated pump for oil and diesel. Telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids.
Capacity: 0,5 l/stroke
Pump tube: 350 - 980 mm

TYPE
Hand operated pumps
PART NO.
10730
DATA
Description: Sturdy model for oil and diesel, telescopic pump tube and 2" drum adaptor included. Do not use with flammable or corrosive fluids.
Capacity: 0,3 l/revolution

TYPE
Mobile oil dispenser
PART NO.
137-37
DATA
Description: For filling up gear oil or topping oil levels. Equipped with hand operated pump and 1.5 m outlet hose c.w. ball valve. Do not use with flammable or corrosive fluids.
Capacity: 0,1 l/stroke
Volume: 25 l

TYPE
Pressurized oil dispenser
PART NO.
137-36
DATA
Description: Air-operated gear oil dispensers for filling or topping up oil levels. Equipped with 1.5m outlet hose and oil gun. Do not use with flammable or corrosive fluids.
Maximum air pressure: 0,3 (3,0) - 0,7 (7,0) MPa (bar)
Volume: 25 l




TYPE
Pressurized oil dispenser with digital meter
PART NO.
137-38
DATA
Description: Air-operated gear oil dispensers for filling or topping up oil levels. Equipped with 1.5m outlet hose and oil gun with digital meter. Do not use with flammable or corrosive fluids.
Maximum air pressure: 0,3 (3,0) - 0,7 (7,0) MPa (bar)
Volume: 25 l
Meter: 10300

TYPE
Portable oil dispenser
PART NO.
137-35
DATA
Description: Equipped with hand operated pump and 1.5 m outlet hose c.w. ball valve. Do not use with flammable or corrosive fluids.
Capacity: 0,1 l/stroke
Volume: 17 l

TYPE
Oil suction gun
PART NO.
10710
DATA
Description: Do not use with flammable or corrosive fluids.
Capacity: 0,5 l/stroke
Hose length: 290 mm

TYPE
Pressure relief valve kit
PART NO.
1 16764 2 16765-60
DATA
1 Outlet: 1/8" (M) BSP
Connection: 3/4" (F)-(M) BSP
2 Outlet: 1/8" (M) BSP
Connection: 1/4" (M) BSP





TYPE
Suction tube for drums and tanks
PART NO.
1 16750 2 16751
DATA
1 Hose length: 2 m Riser tube length: 1040 mm Connection: 3/4" - 1" (F)-(M) BSP 2 Hose length: 2 m Riser tube length: 1600 mm Connection: 3/4" - 1" (F)-(M) BSP

TYPE
Telescopic suction tubes
PART NO.
1 16753 2 16754
DATA
Material: Steel Connection: 3/4" (M) BSP 1 Length: 600-1085 mm 2 Length: 1062-2012 mm

TYPE
Outlet hoses
PART NO.
1 16740 4 16743 2 16741 5 16744 3 16742 6 16745
DATA
Dimension: 12,5 (1/2") mm (inch) Thread: 1/2" - 1/2" (F)-(F) BSP Adaptor: 3/4" - 1/2" (M)-(M) BSP 1 Hose length: 2 m 2 Hose length: 3 m 3 Hose length: 4 m 4 Hose length: 5 m 5 Hose length: 6 m 6 Hose length: 8 m

TYPE
Connection hoses
PART NO.
1 16735 2 16737 3 16747
DATA
1 Dimension: 25,4 (1") mm (inch) Thread: 1" - 1" (F)-(M) BSP Hose length: 1 m 2 Dimension: 19 (3/4") mm (inch) Thread: 3/4" - 3/4" (F)-(F) BSP Hose length: 1,5 m 3 Dimension: 50,8 (2") mm (inch) Thread: 2" - 2" (F)-(F) BSP Hose length: 0,7 m

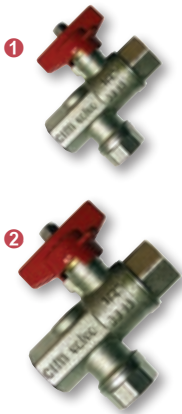


TYPE
Oil filter with ball valve
PART NO.
1 16710-50
2 16711-50
DATA
Maximum working pressure: 5,0 (50) MPa (bar)
1 Connection: 1/2" (F) BSP
2 Connection: 3/4" (F) BSP

TYPE
Ball valves for oil / air / water
PART NO.
1 1887257
2 1887260
3 1367262
4 1367258
5 1367259
DATA
1 Maximum working pressure: 2,5 (25) MPa (bar)
Connection: 1/4" (F) BSP
2 Maximum working pressure: 6,4 (64) MPa (bar)
Connection: 3/8" (F) BSP
3 Maximum working pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP
4 Maximum working pressure: 5,0 (50) MPa (bar)
Connection: 3/4" (F) BSP
5 Maximum working pressure: 5,0 (50) MPa (bar)
Connection: 1" (F) BSP

TYPE
Bonded seals
PART NO.
1 1367264
2 1367265
3 1367347
4 1367422
5 1367266
DATA
1 Dimension: 1/4"
2 Dimension: 3/8"
3 Dimension: 1/2"
4 Dimension: 3/4"
5 Dimension: 1"

TYPE
Straight adapters
PART NO.
1 1367267
2 1367271
3 1317181
4 1317180
5 1367268
6 1367270
7 1367269
DATA
1 Thread: 1/4" - 1/4" (M)-(M) BSP
2 Thread: 3/8" - 3/8" (M)-(M) BSP
3 Thread: 1/2"-1/2" (M)-(M) BSP
4 Thread: 3/4"-1/2" (M)-(M) BSP
5 Thread: 3/4" - 3/4" (M)-(M) BSP
6 Thread: 1" - 3/4" (M)-(M) BSP
7 Thread: 1" - 1" (M)-(M) BSP

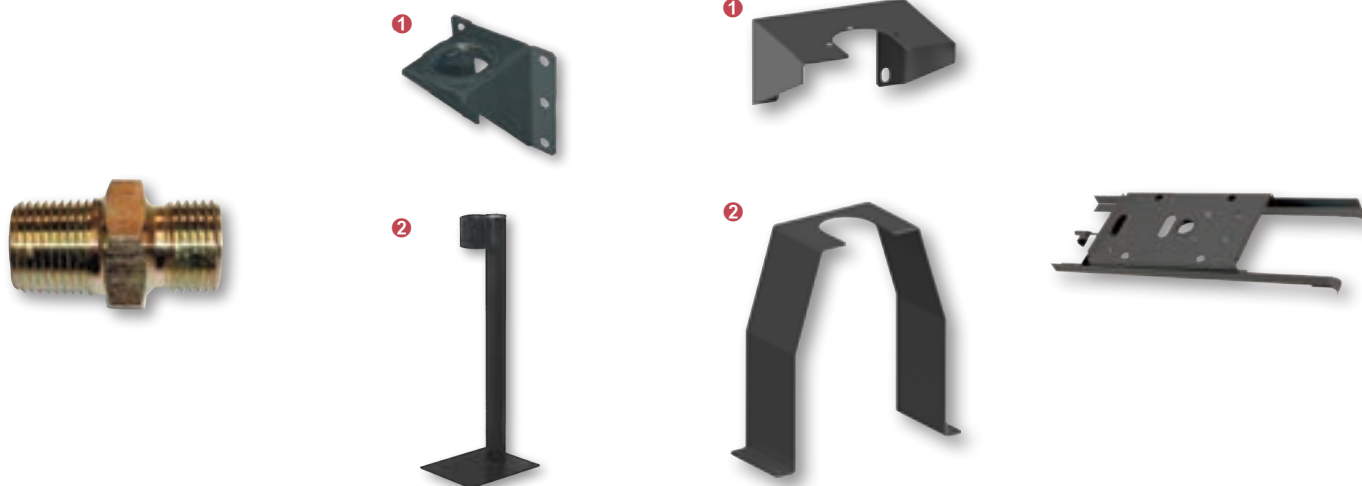

TYPE	TYPE	TYPE	TYPE
Tapered adapters	Pump brackets	Bracket for H.D. pumps	IBC pump and reel bracket
PART NO.	PART NO.	PART NO.	PART NO.
1 1367587 2 1357676 3 1367594	1 16730 2 16733	1 16705 2 16709	1069237
DATA	DATA	DATA	DATA
1 Thread: 1/4" - 1/4" (M)-(M) BSP - BSPT 2 Thread: 3/8" - 3/8" (M)-(M) BSP - BSPT 3 Thread: 1/2" - 1/2" (M)-(M) BSP - BSPT	1 Connection: 2" (F) BSP 2 Connection: 2" (F) BSP	1 Description: For installation of wall mounted air operated HD pumps. 2 Description: For installation of air operated HD pumps.	Description: Bracket for installation of our air operated pumps and hose reels on an IBC tank. Fits our Reels: S10, S15, CC15, C15 and T15. Connection: 2" (F) BSP




TYPE
Bracket with carrying handle for electric pumps
PART NO.
16749
DATA
Description: For electrical pumps

TYPE
Drip holster
PART NO.
1 16781 2 16782
DATA
1 Description: Wall mounted drip pockets for hose end meters and oil guns. Bleeder valve included. 2 Description: Wall mounted drip pocket for hose end meters and oil guns, removable drip tray.

TYPE
Drum adapters various containers
PART NO.
1 0925-400 2 0925-026
DATA
1 Model: Bung adaptor Mauser G2"(f) 2 Model: Bung adaptor Trisure G2"(f)

TYPE
Drum adapters 26-38 mm
PART NO.
1 1117701 5 1117705 2 1117704 6 1117178 3 1117718 7 1118436 4 1137123 8 1117707
DATA
Connection: 2" (M) BSP 1 Dimension: Ø26 mm 2 Dimension: Ø28 mm 3 Dimension: Ø30 mm 4 Dimension: Ø32 mm 5 Dimension: Ø34 mm 6 Dimension: Ø35 mm 7 Dimension: Ø36 mm 8 Dimension: Ø38 mm

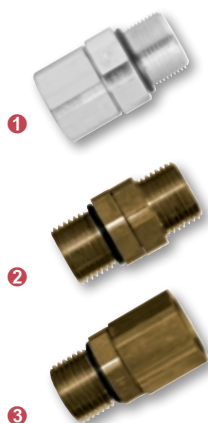

TYPE	
Drum adapter 40-54 mm	
PART NO.	
1 1157234	4 1155153
2 1117610	5 1117277
3 1117065	
DATA	
Connection: 2" (M) BSP	
1 Dimension: Ø40 mm	
2 Dimension: Ø42 mm	
3 Dimension: Ø50 mm	
4 Dimension: Ø52 mm	
5 Dimension: Ø54 mm	

TYPE
Swivel for oil
PART NO.
1 1568507
2 3368519
3 3368520
DATA
1 Thread: 1/2 - 1/2" (F)-(M) BSP
2 Thread: 1/2" - 1/2" (M)-(M) BSP
3 Thread: 1/2" - 1/2" (F)-(M) BSP

TYPE	
Plastic measure with flex spout	
PART NO.	
➊ 16770	➋ 16772
➌ 16771	➍ 16773
DATA	
➊ Volume: 1,0 l	
➋ Volume: 2,0 l	
➌ Volume: 3,0 l	
➍ Volume: 5,0 l	

TYPE
Plastic funnels
PART NO.
16761
DATA
Model: Funnel 190 mm with flexible spout

NOTES

Grease equipment

Air operated grease pumps	50
Grease pump kits	55
Hose reels for grease	59
Equipment for grease	60
Battery operated grease guns	61
Grease control valves and accessories	62
Drum covers and accessories	62
Grease fittings	66

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS

C70-Series



E80-Series



E80-Series



TYPE
55:1 Pump for 18-180 kg drum
PART NO.
1 25765
2 25766
3 25767
DATA
Ratio: 55:1
Capacity: 540 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 1/4" (F) BSPT
Seals: NBR / PTFE
1 Pump tube: 26 (920) Ø (length) mm
2 Pump tube: 26 (725) Ø (length) mm
3 Pump tube: 26 (510) Ø (length) mm

TYPE
60:1 Pump for 18-180 kg drum
PART NO.
1 25735
2 25736
3 25737
DATA
Ratio: 60:1
Capacity: 1100 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/8" (F) BSPT
Seals: PU / PTFE
1 Pump tube: 30 (930) Ø (length) mm
2 Pump tube: 30 (750) Ø (length) mm
3 Pump tube: 30 (450) Ø (length) mm

TYPE
80:1 Pump for 18-180 kg drum
PART NO.
1 25795
2 25796
3 25794
DATA
Ratio: 80:1
Capacity: 1100 gr/min
Air connection: 1/4" (F) BSPT
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/8" (F) BSPT
Seals: PU / NBR
1 Pump tube: 30 (940) Ø (length) mm
2 Pump tube: 30 (760) Ø (length) mm
3 Pump tube: 30 (460) Ø (length) mm

TYPE
Inlet filter
PART NO.
2150210
DATA
Description: Fits the following pumps:
• 25735, -36, -37 and
• 25794, -95, -96

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS

C115-Series



C115-Series



C115-Series



C150-Series



TYPE
40:1 HD Pump for 50-180 kg drum
PART NO.
1 25745 2 25746
DATA
Ratio: 40:1 Capacity: 11 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Seals: PE / PTFE / NBR 1 Pump tube: 50 (855) Ø (length) mm 2 Pump tube: 50 (650) Ø (length) mm

TYPE
70:1 HD Pump for 50-180 kg drum
PART NO.
1 25730 2 25731
DATA
Ratio: 70:1 Capacity: 7,5 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Seals: PE / PTFE / NBR 1 Pump tube: 50 (855) Ø (length) mm 2 Pump tube: 50 (650) Ø (length) mm

TYPE
70:1 HD Pump for bulk tank drum
PART NO.
25732
DATA
Ratio: 70:1 Capacity: 7,5 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Pump tube: 50 (490) Ø (length) mm Seals: PE / PTFE / NBR

TYPE
80:1 HD Pump for 50-180 kg drum
PART NO.
1 25787 2 25788
DATA
Ratio: 80:1 Capacity: 8 kg/min Air connection: 1/2" (F) BSP Maximum air pressure: 1,4 (14) MPa (bar) Outlet: 1/2" (F) BSP Seals: PE / PTFE / NBR 1 Pump tube: 50 (855) Ø (length) mm 2 Pump tube: 50 (650) Ø (length) mm

AIR OPERATED GREASE PUMPS

AIR OPERATED GREASE PUMPS



E80-Series



C115-Series



C150-Series



TYPE
60:1 HD Pump for 50-180 kg drum
PART NO.
1 25710
2 25711
3 25712
DATA
Ratio: 60:1
Capacity: 2,0 kg/min
Air connection: 3/8" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/8" (F) BSP
Seals: FKM / PTFE / NBR
1 Pump tube: 35 (925) Ø (length) mm
2 Pump tube: 35 (730) Ø (length) mm
3 Pump tube: 35 (516) Ø (length) mm

TYPE
15:1 Transfer pump for 18-180 kg drum
PART NO.
1 15740
2 15741
DATA
Ratio: 15:1
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Outlet: 3/4" (F) BSP
Seals: PU / NBR
1 Pump tube: 32 (910) Ø (length) mm
2 Pump tube: 32 (235) Ø (length) mm

TYPE
25:1 Transfer pump for 180 kg drum
PART NO.
25725
DATA
Ratio: 25:1
Capacity: 16 kg/min
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,4 (14) MPa (bar)
Outlet: 1/2" (F) BSP
Pump tube: 70 (855) Ø (length) mm
Seals: PE / PTFE / NBR

TYPE
12:1 Transfer pump for bulk tank
PART NO.
25720
DATA
Ratio: 12:1
Capacity: 40 kg/min
Air connection: 1/2" (F) BSP
Maximum air pressure: 1,4 (14) MPa (bar)
Outlet: 1" (F) BSP
Pump tube: 70 (226) Ø (length) mm
Seals: PE / PU / NBR / PTFE



TYPE	TYPE	TYPE	TYPE
Cam-Lock adapters	Mobile grease pump hoist for 12-20 kg	Grease pump and hoist	Pump hoist for lifting eye
PART NO.	PART NO.	PART NO.	PART NO.
1 2357404 2 2357405	26746	26742	26741
DATA	DATA	DATA	DATA
1 Description: Allow to fit a pump horizontally or vertically to grease bags, totes and other type of containers. Fixes to a C115- or C150-series pump body. Standard 3" male cam-lock connection.	Description: Mobile unit designed for use with hard to pump, sticky and high viscosity greases up to NLGI3. A pneumatic piston elevates the pump for replacing an empty pail. The pneumatic piston also pushes down when the pump is in use.	Ratio: 60:1 Pump: 25737 Description: Mobile unit designed for use with hard to pump, sticky and high viscosity greases up to NLGI3. A pneumatic piston elevates the pump for replacing an empty pail. The pneumatic piston also pushes down when the pump is in use.	Height: 1630 - 2630 mm Description: Lifts and lowers pumps, making drum changes easier, faster and more efficient. Swings 360° around it's own axis, serving up to three pumps / barrels. Air operated.
2 Description: Allow to fit a pump horizontally or vertically to grease bags, totes and other type of containers. Standard 3" female cam-lock connection.	It is ideal for situations where it is important to get all the grease out of the bucket. Applications include expensive grease where complete emptying is essential, dented buckets/drums that cause the follower lid to stick, and easy handling of the grease to avoid debris that can damage the pump or machine. Delivered without pump.	It is ideal for situations where it is important to get all the grease out of the bucket. Applications include expensive grease where complete emptying is essential, dented buckets/drums that cause the follower lid to stick, and easy handling of the grease to avoid debris that can damage the pump or machine.	
	Includes outlet hose 3 m, Z-swivel and grease control valve. Pump sold separately.	Complete kit with pump hoist, pump 60:1, outlet hose 3 m, Z-swivel and grease control valve.	



TYPE
Pump hoist
PART NO.
26705
DATA
Height: 1630 - 2630 mm
Description: The Eurolube Pump Hoist offers better performance, ease of use and safe handling. Compact and robust design. The lift can be rotated, this feature allows 3 grease drums to be in position for quick change to a new grease drum. Robust lever valve for UP/DOWN control of the lift.

TYPE
Single post pump hoist 40:1
PART NO.
257-55
DATA
Maximum air pressure: 1,4 (14) MPa (bar)
Pump: 25745
Description: Offers better performance, easy use and safe handling. Robust follower plate 550-590mm with rubber blade wiper to ensure positive sealing of greases. Compact and robust design. the lift can be rotated, this feature makes it possible to have 3 grease drums in position, for a quick change to a new grease drum. Robust lever valve for UP/DOWN control of the hoist.

TYPE
Single post pump hoist 70:1
PART NO.
257-56
DATA
Maximum air pressure: 1,4 (14) MPa (bar)
Pump: 25730
Description: Offers better performance, easy use and safe handling. Robust follower plate 550-590mm with rubber blade wiper to ensure positive sealing of greases. Compact and robust design. the lift can be rotated, this feature makes it possible to have 3 grease drums in position, for a quick change to a new grease drum. Robust lever valve for UP/DOWN control of the hoist.

TYPE
Power Ram pump hoist 40:1
PART NO.
257-51
DATA
Description: The power Ram pump hoists offer better performance, easy use and safe handling, powered by Ø80mm twin-post pressure primers. Robust one-piece aluminium follower plate with twin rubber blade wipers to ensure positive sealing of high-viscosity greases. built in automatic low level shut of valve, that prevents dry pumping and protect the pump. pivotable air control box, with two air regulators, one for pump control and one for hoist control. ON/OFF push button for pump control. Robust lever valve for UP/DOWN control of the hoist. Includes: pump, pump hoist, quick coupling, filter regulator, air line hose, grease hose, follower plate.
Capacity: 11000 gr/min
Air connection: 1/2" (F) BSP
Pump: 25746

AIR OPERATED GREASE PUMPS

GREASE PUMP KITS



TYPE
Power Ram pump hoist 70:1
PART NO.
257-52
DATA
Description: The power Ram pump hoists offer better performance, easy use and safe handling, powered by Ø80mm twin-post pressure primers. Robust one-piece aluminium follower plate with twin rubber blade wipers to ensure positive sealing of high-viscosity greases. built in automatic low level shut of valve, that prevents dry pumping and protect the pump. pivotable air control box, with two air regulators, one for pump control and one for hoist control. ON/OFF push button for pump control. Robust lever valve for UP/DOWN control of the hoist. Includes: pump, pump hoist, quick coupling, filter regulator, air line hose, grease hose, follower plate. Capacity: 7500 gr/min Air connection: 1/2" (F) BSP Pump: 25731

TYPE
Power Ram hoist without pump
PART NO.
26700
DATA
Description: The Power Ram pump hoist ensures enhanced performance, user-friendly operation, and safety. It features twin Ø80mm cylinders for efficient grease input and a durable aluminium follower plate with dual sealing lips, maintaining cleanliness while handling high-viscosity greases. The standard automatic low-level stop prevents dry pumping, safeguarding the pump. Its swivelling control unit includes built-in regulators—one for pump control and another for hoist control—with ON/OFF buttons for pump operation and a sturdy lever valve for hoist movement.

TYPE
Pump kit for 185 kg drums
PART NO.
① 257-32 ② 257-32FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar) ① Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25735, quick coupler, filter regulator, air line hose 1/4" x 1,5m, grease hose 3/8" x 2m, drum cover, ball valve, nipples. For container: 180 kg ② Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25735, quick coupler, filter regulator, air line hose 1/4"x1,5m, grease hose 3/8"x2m, drum cover, follower plate, ball valve, nipples. For container: 180 kg

TYPE
Pump kit for 50 kg drums
PART NO.
① 257-31 ② 257-31FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar) ① Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25736, quick coupler, filter regulator, air line hose 1/4"x1,5m, grease hose 3/8" x 2m, drum cover, ball valve, nipples. For container: 50-60 kg ② Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 60:1 pump 25736, quick coupler, filter regulator, air line hose 1/4" x 1,5m, grease hose 3/8" x 2m, drum cover, follower plate, ball valve, nipples. For container: 50-60 kg



TYPE
Mobile greaser 185 kg
PART NO.
1 257-39 2 257-39FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 4 m, trolley, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 4m, trolley, drum cover, follower plate.

TYPE
Mobile greaser 185 kg
PART NO.
1 257-40 2 257-40FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, hose Reel S15, H.D. trolley, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, hose Reel S15, H.D. trolley, drum cover, follower plate.

TYPE
Deluxe greaser 50 kg
PART NO.
1 257-35 2 257-35FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, Deluxe trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, Deluxe trolley, follower plate.

TYPE
Mobile greaser 50 kg
PART NO.
1 257-33 2 257-33FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.



TYPE
Deluxe greaser 20 kg
PART NO.
1 257-34 2 257-34FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, Deluxe trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, follower plate, Deluxe trolley.

TYPE
Mobile greaser 20 kg
PART NO.
1 257-37 2 257-37FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, drum cover, trolley.
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, drum cover, follower plate, trolley.

TYPE
Portable greaser 15-20 kg
PART NO.
1 257-36 2 257-36FP 3 257-03FP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover.
For container: 20 kg
2 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.
For container: 20 kg
3 Description: Grease pump kits designed to meet any needs of greasing, based on our high performance grease pumps. Includes: 55:1 pump, grease gun, z-swivel, grease hose 3/8"x 2m, handle, drum cover, follower plate.
For container: 15-18 kg

TYPE
Transfer pump for grease
PART NO.
1 257-05 2 257-06
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Filling pump for large volumes of grease into containers for central lubrication, in production, sliding board trucks, etc. Includes: 4m x 5/8" hose, H.V. Dispensing gun, H.D. trolley. Drum not included.
2 Description: Filling pump for large volumes of grease into containers for central lubrication, in production, sliding board trucks, etc. Includes: 4m x 5/8" hose, digital meter, H.D. trolley. Drum not included.

GREASE PUMP KITS

GREASE PUMP KITS



TYPE
Centralized lubrication filler pump 3:1
PART NO.
1 137-21 2 137-22
DATA
1 Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. For grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 20kg, Includes: 3:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling.
Capacity: 6 kg/min
2 Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. For grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 50kg, Includes: 3:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling.
Capacity: 6 kg/min

TYPE
Centralized lubrication filler pump 15:1
PART NO.
257-22
DATA
Description: Air operated pump for quick, safe and clean re-filling of grease buckets in chassis lube systems. for grease up to NLGI 0. Capacity: 6kg/min NLGI 0 at 0,7 MPa. Drum size: 50kg, Includes: 15:1 pump, 1/4" ball valve, trolley, drum cover, 1.5m hose c/w quick coupling ISO7241-1.
For container: 50 kg
Maximum air pressure: 1,0 (10) MPa (bar)

TYPE
Centralized filler pumps
PART NO.
1 20720 2 20721
DATA
1 Description: Sturdy hand operated pump for quick, safe and clean re-filling of buckets in chassis lube systems. Capacity: 80gr per stroke. Includes: hand pump, drum cover, 1.5m hose c/w quick coupling.
Capacity: 80 gr/stroke
For container: 12-15 kg
2 Description: Sturdy hand operated pump for quick, safe and clean re-filling of buckets in chassis lube systems. Capacity: 80gr per stroke. Includes: hand pump, drum cover, 1.5m hose c/w quick coupling.
Capacity: 80 gr/stroke
For container: 20 kg

TYPE
Grease filler pump for grease guns
PART NO.
1 20710 2 20711 3 20712
DATA
Packaging LxWxH: 0,78 x 0,13 x 0,35 m
1 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 12-15 kg
2 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 20 kg
3 Description: Sturdy hand operated pump for quick, safe and clean re-filling of lever grease guns. Capacity: 80gr per stroke Includes: hand pump, drum cover, follower plate, loader nipple 9 & 12,5mm.
For container: 50 kg

GREASE PUMP KITS

HOSE REELS FOR GREASE



S10/S15-Series



C15/T15-Series



S15/T15-Series



TYPE
Loader nipple
PART NO.
26784
DATA
Description: For re-filling grease lever pumps using filler pumps. Male part. The corresponding female coupler is found on filler pumps 20710, 20711 & 20712.
Dimension: Ø12 mm
Connection: 1/8" (M) BSP

TYPE
S10/S15-Series
PART NO.
① 27837 ② 27835 ③ 27834
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
① Hose length: 10 m max (without hose)
Connection: 3/8" - 3/8" (M)-(M) BSP
② Hose length: 15 m max (without hose)
Connection: 3/8" - 3/8" (M)-(M) BSP
③ Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
T15/C15-Series
PART NO.
① 27841 ③ 27833 ② 27840 ④ 27832
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
① Hose length: 15 m max (without hose)
Connection: 3/8" - 3/8" (M)-(M) BSP
② Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
③ Hose length: 15 m max (without hose)
Connection: 3/8" - 3/8" (M)-(M) BSP
④ Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
Reel kit with grease gun
PART NO.
① 327-04 ② 327-12
DATA
Maximum pressure: 35 (350) MPa (bar)
① Description: Includes: hose reel T15 15m (27832), z-swivel, grease gun (26716), ball valve.
② Description: Includes: hose reel S15 15m (27834), z-swivel, grease gun (26716), ball valve.

CC15/T20-Series



TYPE
T20/CC15-Series
PART NO.
1 27850
2 27852
3 27853
DATA
1 Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 27,5 (275) MPa (bar)
Hose length: 20 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Dimension: 6,35 (1/4") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Hose length: 10 m
Connection: 1/4" - 1/4" (M)-(M) BSP
3 Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 1/4" (F)-(M) BSP

TYPE
Lever grease pump standard duty
PART NO.
1 20701
2 20702
3 20703
DATA
1 Description: Hand operated grease gun for quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge, Capacity: 1 cm³ /stroke.
Capacity: 0,8 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
2 Description: Heavy duty lever grease pump with variable stroke. Equipped with ergonomic handle. Includes filler nipple and bleeder valve. For bulk grease or 400 gram cartridge Capacity: 1 cm³ per stroke.
Capacity: 0,8 gr/stroke
Maximum pressure: 70 (700) MPa (bar)
3 Description: Hand operated grease gun for quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge. Capacity: 1 cm³ per stroke. Delivered with replaceable outlet tube and hydraulic connector.
Capacity: 0,8 gr/stroke
Maximum pressure: 45 (450) MPa (bar)

TYPE
Lever grease gun standard duty 1000 cm³
PART NO.
20706
DATA
Description: For use either with bulk grease (filled by hand or by loader pump).
Capacity: 0,8 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
Volume: 1000 cm³

TYPE
High pressure pump with container
PART NO.
1 20742
2 20745
DATA
1 Capacity: 10/15/20 gr/stroke
Maximum pressure: 35 (350) MPa (bar)
Volume: 16 kg
Hose length: 1,5 m
2 Capacity: 2 gr/stroke
Maximum pressure: 50 (500) MPa (bar)
Volume: 5 kg
Hose length: 2 m




TYPE
High pressure greaser
PART NO.
1 20730 2 20731
DATA
Capacity: 2 gr/stroke Maximum pressure: 35 (350) MPa (bar) 1 For container: 12-15 kg 2 For container: 20 kg

TYPE
20V Battery operated grease gun
PART NO.
1 25532 2 25534
DATA
Maximum pressure: 50 (500) MPa (bar) 1 Description: Delivers up to 24 grease cartridges per charge free flow. LCD-display which shows battery status, grease meter, remaining grease in grease tube, warns if fitting is clogged, if grease tube has air pockets or is empty. Built in LED work light. Includes: Battery powered grease gun 20V, 1pc 20V 2Ah Lithium-Ion battery, battery charger 230V, hose 1100mm with hydraulic nozzle. 2 Description: Delivers up to 40 grease cartridges per charge free flow. LCD-display which shows battery status, grease meter, remaining grease in grease tube, warns if fitting is clogged, if grease tube has air pockets or is empty. Built in LED work light. Includes: Battery powered grease gun 20V, 1pc 20V 4Ah Lithium-Ion battery, battery charger 230V, hose 1100mm with hydraulic nozzle.

TYPE
Batteries
PART NO.
1 2553401 2 2553201
DATA
1 Capacity: 4 Ah Voltage: 20 V AC Fits: 25534 2 Capacity: 2 Ah Voltage: 20 V DC Fits: 25532

TYPE
Battery chargers
PART NO.
2553402
DATA
Fits: 25532, 25534

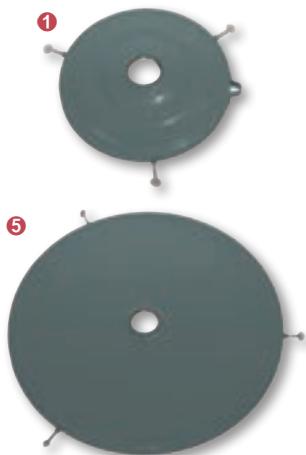

TYPE
Grease control valve
PART NO.
1 26716
2 26716-01
3 26716-11
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Model: Grease gun with outlet tube
2 Model: Grease gun with flex hose (450mm)
3 Model: Grease gun with flex hose (450mm) and Z-swivel

TYPE
Meters for grease
PART NO.
1 26715
2 2168600
DATA
Capacity: >1000 gr/min
Maximum pressure: 50 (500) MPa (bar)
Accuracy: 3 % ±
1 Model: Digital grease meter with grease gun
Connection: 1/4" (F) BSP
2 Model: Digital grease inline meter. 1/8" (F) BSP 2500 gr/min 70 (700) MPa (bar)
Connection: 1/8" (F) BSP

TYPE
Air operated grease gun
PART NO.
25770
DATA
Description: For quick and reliable greasing operation in many applications using grease up to NLGI 2. For bulk grease or 400 gram cartridge.
Ratio: 60:1
Capacity: 1 gr/stroke
Maximum air pressure: 1,0 (10) MPa (bar)
Connection: 1/4" (F) BSP

TYPE
Drum covers
PART NO.
1 26770
2 26771
3 26772
4 26773
5 26774
DATA
1 For container: 12 kg
Dimension: Ø 245-285 mm
2 For container: 20 kg
Dimension: Ø 280-320 mm
3 For container: 50 kg
Dimension: Ø 320-380 mm
4 For container: 50 kg
Dimension: Ø 360-408 mm
5 For container: 180 kg
Dimension: Ø 560-610 mm

DRUM COVERS AND ACCESSORIES

DRUM COVERS AND ACCESSORIES




TYPE
Drum cover accessories
PART NO.
1 26752 2 2168920 3 26778
DATA
1 Model: Carrying handle for 26770 2 Model: T-Screws for plastic buckets, 3 pcs 3 Model: Holder for grease gun

TYPE
Drum cover for H.D. pumps
PART NO.
26775
DATA
For container: 180 kg Dimension: Ø 560-610 mm

TYPE
Follower plates
PART NO.
1 26767 4 26763 2 26765 5 26762 3 26764 6 26760
DATA
1 For container: 18 kg Dimension: Ø 230-260 mm 2 For container: 20 kg Dimension: Ø 260-290 mm 3 For container: 25 kg Dimension: Ø 300-330 mm 4 For container: 50 kg Dimension: Ø 330-370 mm 5 For container: 50 kg Dimension: Ø 360-390 mm 6 For container: 180 kg Dimension: Ø 550-590 mm

TYPE
Follower plates for H.D. pumps
PART NO.
1 26768 2 26769
DATA
1 For container: 50 kg Dimension: Ø 360-405 mm 2 For container: 180 kg Dimension: Ø 550-590 mm

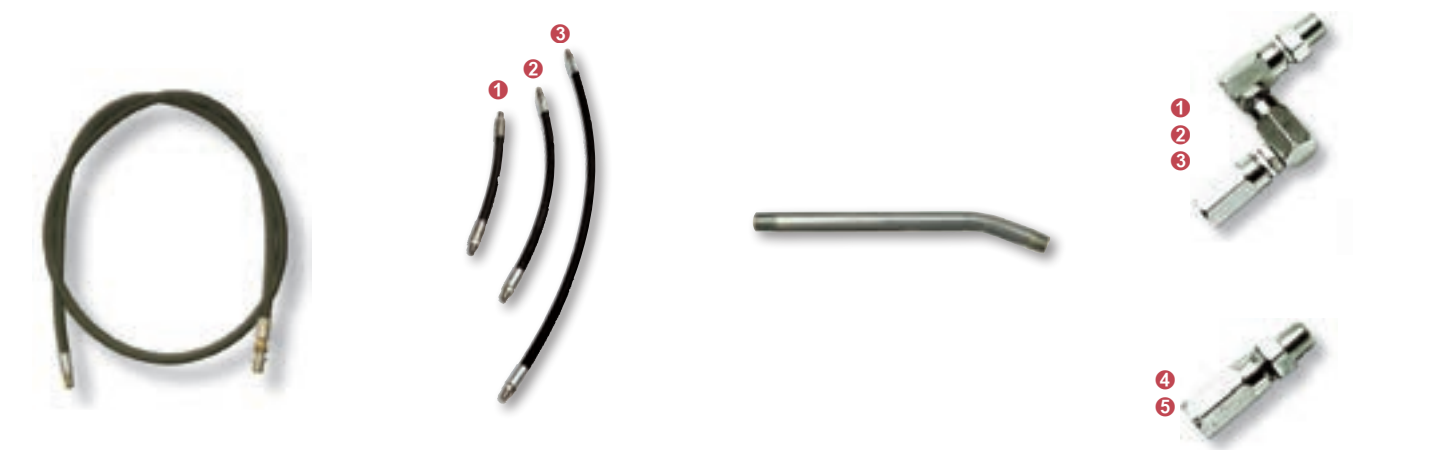

TYPE
Grease hoses
PART NO.
1 26710
2 26711
3 26712
DATA
Connection: 1/4" - 3/8" (F)-(M) BSPT
1 Length: 2 m
2 Length: 4 m
3 Length: 6 m

TYPE
Outlet hoses for grease guns
PART NO.
1 26731
2 26732
3 26733
DATA
Maximum pressure: 50 (500) MPa (bar)
Connection: 1/8" (M)-(M) BSP
1 Model: Outlet hose 1/8" x 200 mm
2 Model: Outlet hose 1/8" x 300 mm
Hose length: 300 mm
3 Model: Outlet hose grease 450 mm x 1/8"
Hose length: 450 mm

TYPE
Outlet tube for grease guns
PART NO.
2060201
DATA
Dimension: Ø10 mm
Thread: 1/8" (M)-(M) BSPT
Length: 140 mm


TYPE
Grease swivels
PART NO.
1 26725
2 26727
3 26729
4 26726
5 26728
DATA
Maximum pressure: 50 (500) MPa (bar)
1 Connection: 1/4" - 1/4" (F)-(M) BSP
2 Connection: 1/4" - 1/2"-27 (M) NPT
3 Connection: 1/8" - 1/2"-27 (M) NPTF
4 Connection: 1/4" (F)-(M) BSP
5 Connection: 1/8" (F)-(M) BSPT

DRUM COVERS AND ACCESSORIES

DRUM COVERS AND ACCESSORIES



TYPE	TYPE	TYPE	TYPE
Grease connectors	Lock-on grease quick coupler	Needle nozzles	Protective cover for grease fittings
PART NO.	PART NO.	PART NO.	PART NO.
1 26721 4 26730 2 26723 5 26796 3 26722	26739	1 2169182 4 2169185 2 2169183 5 26718 3 2169184	1 43770 2 43771
DATA	DATA	DATA	DATA
Dimension: Ø 15 mm Connection: 1/8" (F) BSP 1 Model: Grease connector Ø15mm 4 jaws 2 Model: Grease connector G1/8" Ø15mm 4 jaws with built-in check valve 3 Model: Grease connector G1/8" Ø18 mm with 3 jaws. 4 Model: Button head nozzle 16 mm 5 Model: Grease connector G1/8" with relief valve	Maximum pressure: 70 (700) MPa (bar) Connection: 1/8" (F) NPT Description: Revolutionary grease coupler. Smooth lock-on mechanism that eases grease fitting coupling and uncoupling. This is a durable, jaws-free coupler that includes seven retaining balls, assuring a proper sealing between grease fitting* and grease pump up to a pressure of 700 bar. Store display for countertop placement also available. Place for 10 couplers. * DIN 71412	1 Model: Needle nozzle Ø 6 mm 2 Model: Needle nozzle Ø 6 mm 45° 3 Model: Needle nozzle Ø 1,4 mm 4 Model: Needle nozzle Ø 2,6 mm 5 Model: Needle nozzle kit of 4 different types	1 Model: Protection cover (red) for grease fittings 2 Model: Protection cover (yellow) for grease fittings



3 X = 19 mm
4 X = 32 mm



TYPE	
Straight, pipe thread. Zinc-plated steel.	
PART NO.	
1 1610-BL	4 1627-B
2 1634	5 1627-S
3 1607-B	
DATA	
1 Thread: 1/8" (M) NPTF	
2 Thread: 1/8" (M) NPT	
3 Thread: 1/8" (M) BSP	
4 Thread: 1/4" (M) NPTF	
5 Thread: 1/4"-28 SAE-LT	

TYPE	
Straight, metric. Zinc-plated steel.	
PART NO.	
1 2106	3 2109
2 2110	4 2112
DATA	
1 Thread: M6x1	
2 Thread: M8X1	
3 Thread: 10x1 mm	
4 Thread: M8X1,25	

TYPE	
Angled 30-67°. Zinc-plated steel.	
PART NO.	
1 1629-B	
2 1688-B	
3 2107	
DATA	
1 Type: 67°	
Thread: 1/4" (M) BSP	
2 Type: 45°	
Thread: R 1/8"	
3 Type: 45°	
Thread: M6x1	


TYPE	
Angled 90°. Zinc-plated steel.	
PART NO.	
1 1613-B	4 1606-B
2 2114	5 2105
3 2108	
DATA	
1 Type: 90°	
Thread: 1/8" NPT	
2 Type: 90°	
Thread: M8X1,25	
3 Type: 90°	
Thread: M6x1	
4 Type: 90°	
Thread: 1/8" (M) NPTF	
5 Type: 90°	
Thread: M8X1	

GREASE FITTINGS

GREASE FITTINGS



TYPE Straight, pipe thread. Stainless steel	TYPE Extensions. Zinc-plated steel.	TYPE Drive fittings. Zinc-plated steel.	TYPE 15mm hex. Zinc-plated steel.
PART NO. 1 1961-S 2 1966-S 3 512-RF	PART NO. 1 43762 2 43706 3 43718	PART NO. 501-A	PART NO. 208-A
DATA 1 Type: Straight Thread: 1/8" (M) BSP Material: Stainless steel (AISI 303) 2 Type: Straight Thread: 1/4"x28SAE Material: Stainless steel (AISI 303) 3 Type: Straight Thread: G1/4" Material:	DATA 1 Thread: 1/8" (F)-(M) NPTF Length: 31 mm 2 Thread: 1/8" (F)-(M) NPTF Length: 3 Thread: 1/8" -1/8" (F)-(M) BSP Length: 32 mm	DATA Type: Straight Connection: Ø8 mm	DATA Thread: G1/8"

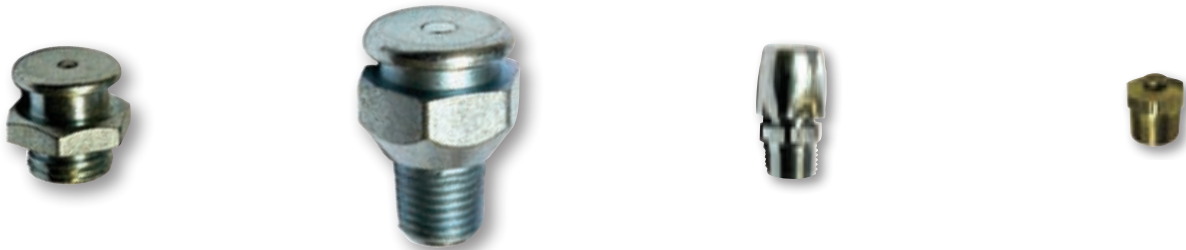

TYPE
16mm hex. Zinc-plated steel.
PART NO.
1 A-212
2 A-1184
3 A-210
DATA
1 Dimension: Ø16 mm
Thread: M10x1
2 Dimension: Ø16 mm
Thread: 1/8"NPTF
3 Dimension: Ø16 mm
Thread: 3/8" (M) NPTF

TYPE
22mm hex. Zinc-plated steel.
PART NO.
1 1823-1
2 1822-A1
3 1820-1
DATA
Type: Ø22 mm
1 Thread: 1/4" (M) NPTF
2 Thread: 3/8" (M) NPTF
3 Thread: 1/2" (M) NPTF

TYPE
Breather fittings. Zinc-plated steel.
PART NO.
1 300805
2 304810
3 131000
DATA
1 Thread: 1/8" (M) NPTF
Maximum pressure: 0.0003 (0,003) MPa (bar)
2 Thread: 1/8" (M) NPTF
Maximum pressure: 0.0008 (0,008) MPa (bar)
3 Thread: 1/8" (M) BSP
Maximum pressure: 0.003 (0,03) MPa (bar)

TYPE
Relief fittings. Zinc-plated steel.
PART NO.
1 317400
2 323060
DATA
1 Thread: 1/8" (M) NPTF
Maximum pressure: 0,002-0,007 (0,02-0,07) MPa (bar)
2 Thread: 1/8" (M) BSP
Maximum pressure: 0,1-0,17 (1,0-1,7) MPa (bar)



Grease fitting rejuvenator

339841


Description:

Simply fill the tool with a light oil and with a few taps the joint will open. The grease fitting rejuvenator will allow a clogged grease fitting and /or joint to take on grease by injecting a light viscosity oil into the grease joint via the grease fitting, thus breaking up and removing any dirt, rust or debris. The purpose of this tool is to free up the joint and the fitting enabling them to be greased. Once the tool is installed onto the grease fitting, only a tapping of the piston is required to open a joint.

NOTES

Waste oil equipment

Waste oil pumps	72
Equipment for pits	72
Mobile waste oil drainers with bowl	74
Waste oil handling	79

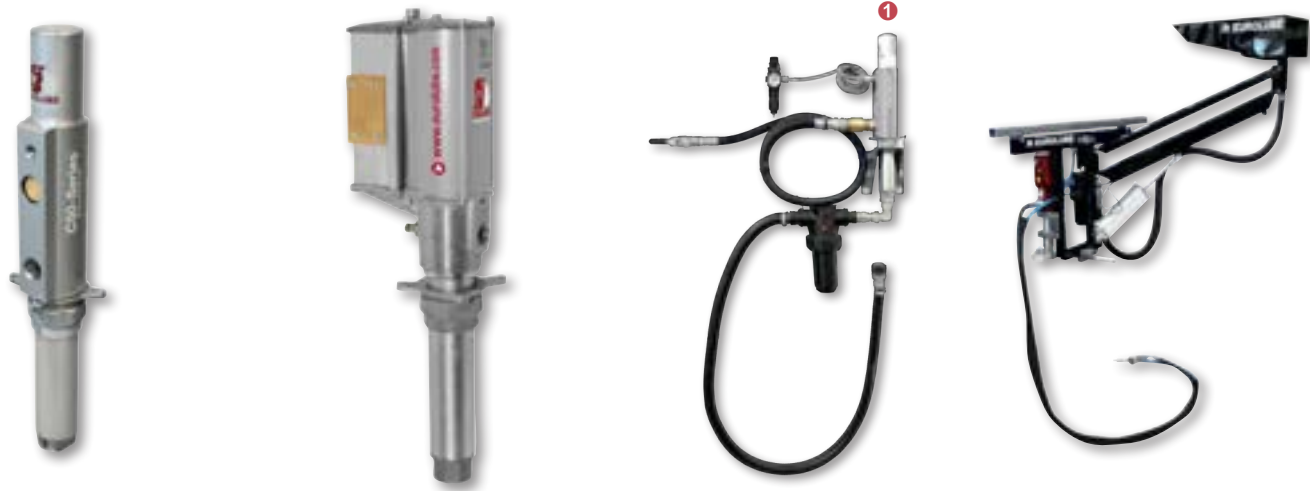


TYPE
Waste oil pump 1:1
PART NO.
C11745
DATA
Capacity: 15 l/min free flow
Maximum air pressure: 0,7 (7) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Connection: 1/4" (F) BSP

TYPE
Waste oil pump 5:1
PART NO.
15832
DATA
Capacity: 38 l/min free flow
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Connection: 1/4" (F) BSP

TYPE
Evacuation pump for mobile drainers
PART NO.
1 317-44 2 317-44SP
DATA
Maximum air pressure: 1,0 (10) MPa (bar)
1 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump B11741, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m suction hose c.w. quick coupler, suction filter.
Pump: B11741 (1:1)
2 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump 15831, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m Suction hose c.w. quick coupler, suction filter.
Pump: 15831 (5:1)

TYPE
Variable waste oil arm for pits
PART NO.
1 317-60 2 317-65
DATA
Maximum air pressure: 0,7 (7) MPa (bar)
Pump: 15831
Volume: 45 l
Hose length: 2 m
Filtration: 600 µm
1 Description: Ideal solution for quick and ef- ficient waste oil draining in pits. The waste oil is pumped directly to the tank from the collection bowl which is mounted on a rail and can be used along the entire length of the pit. Controls for pump speed and arm up/down are mounted on the arm.
Media: Waste oil
2 Description: Ideal solution for quick and ef- ficient antifreeze draining in pits. The used antifreeze is pumped directly to the tank from the col- lection bowl which is mounted on a rail and can be used along the entire length of the pit. Controls for pump speed and arm up/down are mounted on the arm.
Media: Glycol

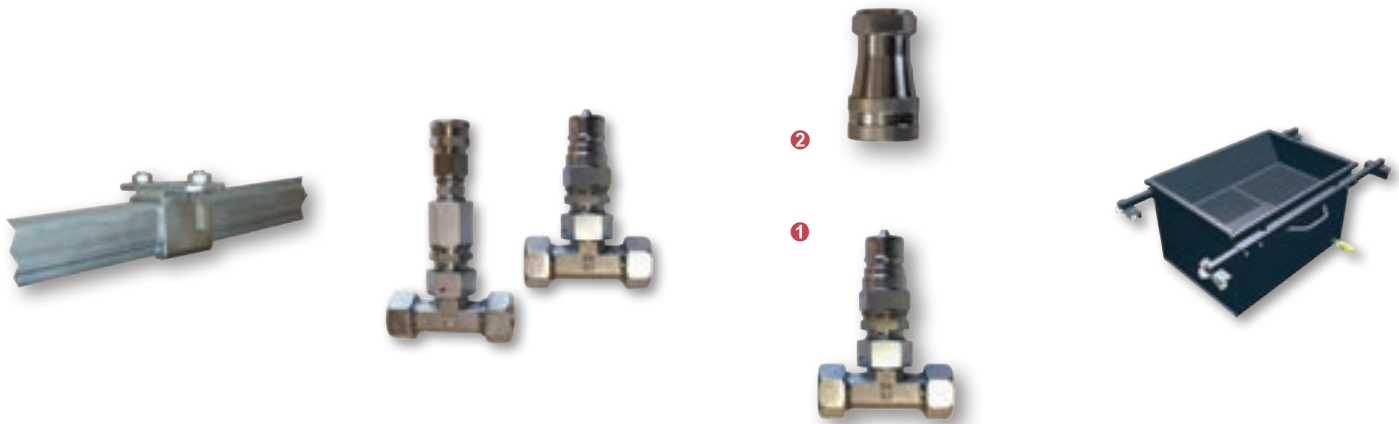

TYPE Rail kit for 317-60, -65	TYPE Connection kit air & oil for 317-60	TYPE Connection kit glycol for 317-65	TYPE Waste oil collector 95 l
PART NO. 1 317-61 2 317-66	PART NO. 317-62	PART NO. 1 317-63 2 3315098	PART NO. 0949-160
DATA 1 Description: Includes: 4m rail, 2 brackets, 1 joining piece. 2 Description: Fasteners and bracket for mounting rails in prefabricated pits.	DATA Description: Includes: T-joint Ø22 with air coupler, T-joint Ø22 with oil coupler.	DATA 1 Model: Connection kit anti freeze for 317-65 for Ø22mm tube incl air coupler 2 Model: Coupler anti freeze 3/4" for 317-65	DATA Description: A sturdy waste oil collector for pits. The emptying of the drainers is done with discharge pump part no 317-44 or 317-47. 95L Tank with adjustable arms, 1030-1450mm. Do not use with flammable or corrosive fluids. Volume: 95 l



TYPE
25 l oil drainer
PART NO.
318-45
DATA
Description: Ideal use with boats, movers, tractors, cars etc. Includes: vacuum pump, 2 m suction hose, probe kit

TYPE
65 l drainer w/o bowl
PART NO.
318-62
DATA
Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 8 probes.

TYPE
Standard 65 l drainer
PART NO.
1 318-65 2 318-66
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl.
2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, quick coupler.

TYPE
Combi 65 l drainer
PART NO.
1 318-64 2 318-67
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 8 probes.
2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes Safety and breathing valve, quick coupler.

MOBILE WASTE OIL DRAINERS WITH BOWL

MOBILE WASTE OIL DRAINERS WITH BOWL




TYPE
Deluxe 65 l drainer
PART NO.
1 318-63 2 318-68
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes, safety and breathing valve, 10 l inspection tank. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 65 l tank, 20 l bowl, vacuum pump, probe kit with 8 probes, Safety and breathing valve, 10 l inspection tank, quick coupler.

TYPE
Special 65 l drainer for motorbikes
PART NO.
318-51
DATA
Description: Waste oil unit with a low bowl. The unit can be discharged by gravity or air pressure.

TYPE
Pump discharge kit
PART NO.
1 317-44 2 317-44SP
DATA
Maximum air pressure: 1,0 (10) MPa (bar) 1 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump B11741, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m suction hose c.w. quick coupler, suction filter. Pump: B11741 (1:1) 2 Description: Discharge pump to extract waste oil and antifreeze from any of our mobile drainers. Do not use with flammable or corrosive fluids. Includes: Pump 15831, wall bracket, 1/4" filter regulator, 1,5m air line hose, 1,5m discharge hose, 3/4" ball valve, 2m Suction hose c.w. quick coupler, suction filter. Pump: 15831 (5:1)

TYPE
Standard 100 l drainer
PART NO.
1 318-80 2 318-85
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, quick coupler. 2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve.

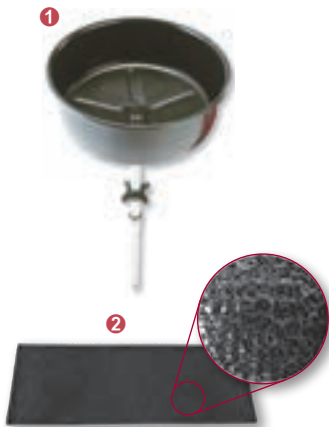

TYPE
Combi 100 l drainer
PART NO.
1 318-81
2 318-86
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, vacuum pump, probe kit with 5 probes, safety and breathing valve, quick coupler.
2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, 2 m discharge hose, safety and breathing valve, vacuum pump, probe kit with 5 probes.


TYPE
Deluxe 100 l drainer
PART NO.
1 318-82
2 318-87
DATA
1 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. To be discharge by pump 317-44. Includes: 100 l tank, 20 l bowl, vacuum pump, probe kit with 5 probes, safety and breathing valve, 10 l Inspection tank, quick coupler.
2 Description: Mobile waste oil drainer used for collection of all types of oils. The drainer can be used under lifts or inside pits. Unique oversized extension and large tool tray on top of the tank improves the work space. Design and performance top of the line. Do not use with flammable or corrosive fluids. Discharge by compressed air max 0,5 bar. Includes: 100 l tank, 20 l bowl, vacuum pump, Probe kit with 5 probes, safety and breathing valve. 10 l Inspection tank.

TYPE
Accessories
PART NO.
1 318-30
2 16791
DATA
1 Description: A handy waste oil bowl for 200 l drum. Include: 2" BSP drum connection. Do not use with flammable or corrosive fluids.
2 Description: Filter pad for mobile drainers to filter out large particles and prevent splashback.

TYPE
Eurovac
PART NO.
11780
DATA
Description: Eurovac saves the environment, time and money. Install directly onto a standard drum. Applications: Extract floor spillage such as oil, anti freeze, water e.g. Empty and clean kegs, drums and tanks e.g.
Capacity: 70 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 0,6 (6) MPa (bar)
Air consumption: 300-1000 l/min free flow
Vacuum level: -4000 mm
Noise level: 80 dB

MOBILE WASTE OIL DRAINERS WITH BOWL

MOBILE WASTE OIL DRAINERS WITH BOWL

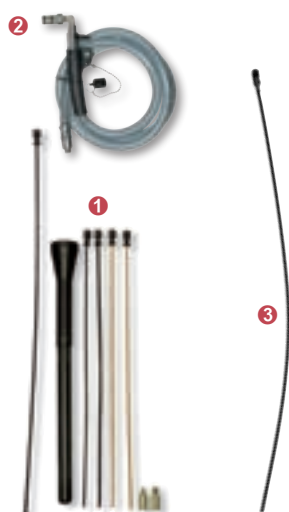

TYPE
Suction probes and handle
PART NO.
1 3188587
2 3188595
3 3188596
DATA
1 Description: Complete kit of probes to be used with our waste oil pumps and waste oil drainers. Includes: Mercedes adapter, VAG adapter, PSA & BMW adapter, Two flexible probes Ø6x4mm, Ø8x6mm, L=700mm, Two rigid probes Ø5x4mm, Ø6x5mm, L=700mm, One flexible probe Ø8x6mm, L=1000mm
2 Description: Suction handle with connector for suction probes.
3 Description: Extra long probe to be used with our waste oil pumps and waste oil drainers. Length 1300mm, diameter 8mm.


TYPE
Drain pan
PART NO.
1 16790
2 16793
3 16794
DATA
1 Model: Drain bowl 14 litre
Volume: 14 l
2 Model: 8L Drain pan with lid and spout
Volume: 8 l
3 Model: Wash/ Waste oil bowl in polyethylene. 8 l
Volume: 8 l

TYPE
Accessories
PART NO.
3188588
DATA
Description: Conversion kit for discharge by pump kit 317-44, fits all models in 318-series

TYPE
Quick coupler QR ISO-A
PART NO.
1 1367769
2 1367770
DATA
1 Description: Fits waste oil/coolant arm 317-60/65, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and fits to quick connector kit 3188588, delivered before 2024-02-14
Thread: 3/4" (F) BSP
2 Description: Fits waste oil/coolant arm 317-60/65, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and included in kit 3188588, delivered before 2024-02-14
Thread: 3/4" (F) BSP



TYPE Quick coupler TEMA profile PART NO. 1 1367771 2 1367772 DATA 1 Description: Fits waste oil arm 317-60, waste oil trolley 318-xx, draining pump 317-44, 317-44SP and quick connector kit 3188588, delivered after 2024-02-14 Thread: 3/4" (F) BSP 2 Description: Passar spilloljearm 317-60, spilloljevagnar 318-xx, tömningspump 317-44, 317-44SP samt ingår i snabbkopplingssats 3188588, levererade efter 2024-02-14. Thread: 3/4" (F) BSP	TYPE Low profile drainer 95 l PART NO. 0951-200 DATA Description: For easy draining of waste oil directly from the vehicle without using a lift. The drainer is emptied either directly through a valve or with a discharge pump if a quick coupling kit is fitted. Dimension: 1250X610X260 mm Volume: ~95 l	TYPE Low profile drainer with pump 95 l PART NO. 0951-500 DATA Description: Robust waste oil drainer for collecting oils from all types of vehicles. Built-in discharge pump, outlet hose, quick couplers and filter. Do not use in flammable or corrosive liquids. Dimension: 1540X760X350 mm Pump: C11745 Volume: 95 l Hose length: 3 m	TYPE Low profile drainer 200 l PART NO. 0951-700 DATA Description: For easy draining of waste oil directly from the vehicle without using a lift. The drainer is emptied either directly through a valve or with a discharge pump if a quick coupling kit is fitted. Suction connection G3/4" (m) Dimension: 1450X820X360 mm Volume: 200 l
---	--	---	--

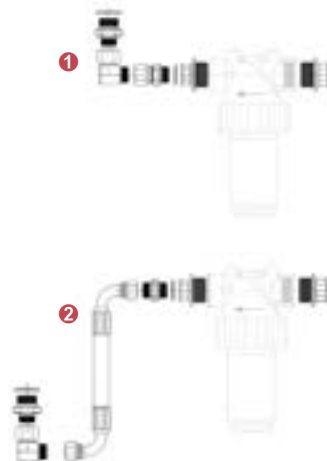

TYPE	TYPE	TYPE	TYPE
Low profile drainer with pump and strainer 200 l	Suction strainer	Connection kit for strainer	Vacuum gauge for strainer
PART NO.	PART NO.	PART NO.	PART NO.
0951-900	16797	1 3188771 2 3188772	3188579
DATA	DATA	DATA	DATA
Description: Robust waste oil drainer for collecting oils from all types of vehicles. Built-in discharge pump, outlet hose, quick couplers and filter. Do not use flammable or corrosive liquids.	Maximum working pressure: 2,0 (20) MPa (bar)	1 Model: Connection kit for strainer, direct connection to pump foot valve	Description: When attaching a vacuum gauge to the suction strainer a Ø 3 mm hole must be drilled in the bottom of the 1/4 BSP port.
Dimension: 1450X820X360 mm	Maximum temperature: 80 °C	2 Model: Connection kit for strainer, hose connection to pump	Connection: 1/4" (M) BSP
Pump: 15832	Filtration: 600 µm		
Volume: 200 l	Connection: 1 1/4" (F)-(F) BSP		
Hose length: 2 m			

NOTES

Multi-fluid equipment

Air operated multi-fluid pumps	82
Wind screen fl / degreaser	85
Meters and control valves	87
Hand operated equipment	89
Measures and funnels	90

C50-Series



C50-Series



E80-Series



E80-Series



TYPE
1:1 Stainless steel pump
PART NO.
11716
DATA
Ratio: 1:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (M) BSP
Pump tube: Ø50 L=235 mm
Seals: Viton, PTFE

TYPE
1:1 Stainless steel pump
PART NO.
11717
DATA
Ratio: 1:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1 (10) MPa (bar)
Inlet: -
Outlet: 3/4" (M) BSP
Pump tube: Ø50 L=915 mm
Seals: Viton, PTFE

TYPE
4:1 Stainless steel pump
PART NO.
12740
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø54 L=220 mm
Seals: PTFE / Teflon®

TYPE
4:1 Stainless steel pump
PART NO.
12745
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø25, 54 L=670+220 mm
Seals: PTFE / Teflon®

AIR OPERATED MULTI-FLUID PUMPS

AIR OPERATED MULTI-FLUID PUMPS

E80-Series



E80-Series




TYPE
4:1 Stainless steel ATEX pump
PART NO.
12741
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø54 L=220 mm
Seals: PTFE / Teflon®
Certification: ATEX

TYPE
4:1 Stainless steel ATEX pump
PART NO.
12746
DATA
Ratio: 4:1
Capacity: 30 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 1" (F) BSP
Pump tube: Ø25, 54 L=670+220 mm
Seals: PTFE / Teflon®
Certification: ATEX

TYPE
1:1 Nickel plated pump
PART NO.
B11741-10
DATA
Ratio: 1:1
Capacity: 40 l/min free flow
Air connection: 1/4" (F) BSP
Maximum air pressure: 1,0 (10) MPa (bar)
Inlet: 1" (F) BSP
Outlet: 3/4" (F) BSP
Material pump body: Nickel-plated steel

TYPE
Pump kit for drum
PART NO.
1 117-10 2 117-11
DATA
Maximum air pressure: 1 (10) MPa (bar)
1 Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: 1/4" Filter regulator, 1,5m Air line hose, 1,5m Outlet hose, 3/4" Ball valve.
Pump: 11717
2 Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: 2,5 m Suction hose, 1/4" Filter regulator, 1,5m Air line hose, 1,5m Outlet hose, 3/4" Ball valve.
Pump: 11716

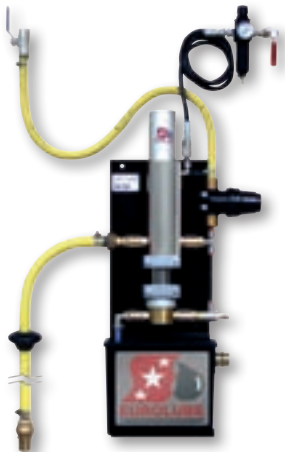

TYPE
Spray pump kit for drum
PART NO.
117-12
DATA
Maximum air pressure: 1 (10) MPa (bar)
Description: Stainless steel pump for dispensing aggressive fluids compatible with AISI 316, and PTFE. Example of fluids: Solvents, alcohols, detergents, sealants, inks, paint, glue, e.g. Do not use with flammable fluids. Includes: Needle valve, 10m chemical hose, Spray gun.
Pump: 11717

TYPE
Mixing pump 1:1
PART NO.
117-21
DATA
Description: Mix Pump designed on our unique stainless steel pump. Mixing ratio 50/50%. Compatible with anti-freeze. High capacity and perfect mixture. Ideal in piped systems. Consistent flow.
Capacity: 15 l/min free flow
Air connection: 1/4" (F) BSP
Inlet: 3/4" (F) BSP
Outlet: 1/2" (F) BSP
Maximum pressure: 0,8 (8) MPa (bar)
Hose length: 2500 mm

TYPE
Ejector mixing unit
PART NO.
1 117-15 2 117-14
DATA
1 Description: Water operated mixing unit with ejector for windshield fluids, adjustable with nozzles between 20% to 50% mix. The wall mounted unit has a suction attachment for connection to the concentrate container. Includes: Water operated mixing unit, Mixing tank, Suction tube L = 0,9m x Ø25mm. • Pump NOT included, see connection kit 117-14 and pump 11716.
2 Description: Contains inlet and outlet hoses, air connection parts

TYPE
Diaphragm pump plastic 31-54 l/min
PART NO.
1 11786 2 11787
DATA
Ratio: 1:1
Air connection: 1/4" (F) NPSM
Material pump body: Polypropylene
1 Capacity: 31 l/min free flow
Inlet: 3/8" (F) BSP
Outlet: 3/8" (F) BSP
Max particle size: 1,6 (1/16") mm (inch)
2 Capacity: 54 l/min free flow
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)



C15-Series



TYPE
Diaphragm pump metal 54 l/min
PART NO.
11788
DATA
Ratio: 1:1
Capacity: 54 l/min free flow
Air connection: 1/4" (F) NPSM
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)
Material pump body: Stainless steel

TYPE
Without hose
PART NO.
37869
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 1,5 (15) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
With hose
PART NO.
1 37838 2 37836 3 37854 4 37848
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
1 Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP
3 Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
4 Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with control valve
PART NO.
1 387-05
2 387-03
3 387-07
DATA
Maximum working pressure: 1,5 (15) MPa (bar)
1 Description: Includes: hose reel S10 10m (37838), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m
2 Description: Includes: hose reel S15 15m (37836), 1/2" ball valve with filter, control valve (10215)
Hose length: 15 m
3 Description: Includes: hose reel C15 10m (37854), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m



CC15-Series



CC15-Series



CC15-Series



TYPE
Reel kit with meter
PART NO.
1 387-06
2 387-04
3 387-08
DATA
Maximum working pressure: 1,5 (15) MPa (bar)
1 Description: Includes: hose reel S10 10m (37838), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m
2 Description: Includes: hose reel S15 15m (37836), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 15 m
3 Description: Includes: hose reel C15 10m (37854), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m

TYPE
With hose
PART NO.
37872
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
With hose
PART NO.
37873
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with control gun
PART NO.
1 386-05
2 386-03
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (37872), 1/2" ball valve with filter, control valve (10215)
Hose length: 10 m
2 Description: Includes: hose reel CC15 15m (37873), 1/2" ball valve with filter, control valve (10215)
Hose length: 15 m

CC15-Series



TYPE
Reel kit with meter
PART NO.
1 386-06 2 386-04
DATA
Maximum working pressure: 7,5 (75) MPa (bar)
1 Description: Includes: hose reel CC15 10m (37872), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 10 m
2 Description: Includes: hose reel CC15 15m (37873), 1/2" ball valve with filter, control valve and digital meter (10210)
Hose length: 15 m

TYPE
Multi-fluid digital meter
PART NO.
30210
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 3,0 (30) MPa (bar)
Seals: FKM / Viton®
Connection: 1/2" (F) BSP

TYPE
In-line meters for chemicals
PART NO.
1 1168819 2 1168818
DATA
Capacity: 1-50 l/min free flow
Connection: 1/2" (F)-(F) BSP
1 Maximum pressure: 3 (30) MPa (bar)
Material: PVC
2 Maximum pressure: 10 (100) MPa (bar)
Material: Stainless steel

TYPE
Dispensing valve for fluids
PART NO.
1 10215 2 10255 3 10277
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 5,0 (50) MPa (bar)
Seals: FKM / Viton®
Connection: 1/2" (F) BSP
1 Media: Windscreen fluid/AdBlue®/Fluids
2 Media: Glycol
3 Media: Glycol



TYPE
Spray gun
PART NO.
36731
DATA
Outlet: 500 mm
Maximum pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Spray guns
PART NO.
36732
DATA
Outlet: 1000 mm
Maximum pressure: 5,0 (50) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Water control valve
PART NO.
1 36722
2 3672261
3 3672264
DATA
Maximum pressure: 3,0 (30) MPa (bar)
1 Description: For water and antifreeze.
Connection: 1/4" (F) BSP
2 Description: For water and antifreeze. With adapter.
Connection: 1/2" (F) BSP
3 Description: For water and antifreeze. With adapter.
Connection: 3/8" (F) BSP

TYPE
Wash guns for water
PART NO.
36724
DATA
Maximum pressure: 3 (30) MPa (bar)
Connection: 1/2" (F) BSP



TYPE
Mobile sprayer 24 l
PART NO.
137-50
DATA
Description: Comprising of a 24 litres steel container, fitted with a compressed air connection and pressure gauge, Ø30 mm (1 1/4") filler hole, sight gauge and two Ø100 mm (4") wheels. Pre-load the container with compressed air 0,3-0,7 MPa (3-7 bar). The dispenser can be used without permanent connection to air pressure. Max. admissible tank capacity is 3/4 of total capacity. Complete with 1,2 m hose and spray handle. Note: Suitable for petroleum based detergents only!
Dimension: 350 x 380 x 780 mm
Volume: ~24 l

TYPE
Multi fluid hand pumps
PART NO.
1 30740 4 30735 2 30741 5 30730 3 10721
DATA
Seals: PTFE / Teflon®
1 For container: 20-25 l
Material: Polypropylene
2 For container: 50-60 l
Material: Polypropylene
3 For container: 180-200 l
Material: Polypropylene
4 For container: 20-200 l
Material: Stainless steel (AISI 316)
5 For container: 20-208 l
Material: PVC

TYPE
Drum pump 60-208 l
PART NO.
1 11646 2 11647
DATA
Capacity: 0,5 l/stroke
Riser tube length: 350-980 mm
Material: Polypropylene
1 Seals: Viton®
2 Seals: EPDM

TYPE
Glycol drainer
PART NO.
0951-500W
DATA
Description: Low trolley for efficient collection of glycol, which can easily be pumped back to the cooling system after service. Do not use with flammable liquids.
Pump: B11741-10
Volume: 95 l

HAND OPERATED EQUIPMENT

MEASURES AND FUNNELS



NOTES


TYPE
Syphon pumps
PART NO.
1 30750
2 30752
DATA
1 Capacity: ~6,5 l/min free flow
For container: 25 l
Riser tube length: 390 mm
2 Capacity: ~18,5 l/min free flow
For container: 208 l
Riser tube length: 850 mm

TYPE
Measure with spout
PART NO.
1 16770
2 16771
3 16772
4 16773
DATA
1 Volume: 1,0 l
2 Volume: 2,0 l
3 Volume: 3,0 l
4 Volume: 5,0 l

TYPE
Plastic funnels
PART NO.
16761
DATA
Model: Funnel 190 mm with flexible spout

AdBlue® equipment

Pumps and kits	92
Hose reels for AdBlue®	93
Nozzles and meters	94

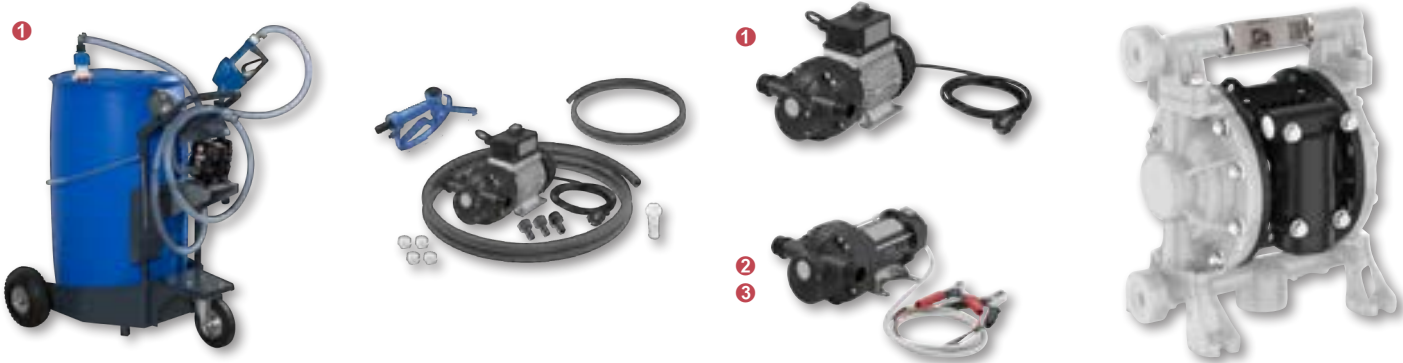

TYPE
Refilling kit
PART NO.
1 387-54 2 387-53
DATA
1 Description: Includes: Diaphragm Pump, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Automatic nozzle, Heavy duty trolley. Can be equipped with hose reel for air to the pump, increasing the operating range.
2 Description: Includes:230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Digital Meter, Automatic nozzle, Heavy duty trolley, Can be equipped with cable reel for the pump, increasing the operating range.

TYPE
Electric pump kit
PART NO.
1 387-40 2 387-41 3 387-42
DATA
1 Description: Includes: 230V Electric pump 60230, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle
2 Description: Includes: 12V Electric pump 60212, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle
3 Description: Includes: 24V Electric pump 60224, Suction hose with quick coupler, 4 m outlet hose, Manual nozzle

TYPE
Electric pumps
PART NO.
1 60230 2 60212 3 60224
DATA
IP: 55
Connection: 1" (M)-(M) BSP
1 Capacity: 30 l/min free flow
Motor: 400 W
Voltage: 230 V AC
2 Capacity: 32 l/min free flow
Motor: 260 W
Voltage: 12 V DC
3 Capacity: 32 l/min free flow
Motor: 310 W
Voltage: 24 V DC

TYPE
Diaphragm pump plastic 31-54 l/min
PART NO.
1 11786 2 11787
DATA
Ratio: 1:1
Air connection: 1/4" (F) NPSM
Material pump body: Polypropylene
1 Capacity: 31 l/min free flow
Inlet: 3/8" (F) BSP
Outlet: 3/8" (F) BSP
Max particle size: 1,6 (1/16") mm (inch)
2 Capacity: 54 l/min free flow
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)



S10-Series



S15-Series



S10-Series



TYPE
Diaphragm pump metal 54 l/min
PART NO.
11788
DATA
Ratio: 1:1
Capacity: 54 l/min free flow
Air connection: 1/4" (F) NPSM
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F) BSP
Max particle size: 2,5 (3/32") mm (inch)
Material pump body: Stainless steel

TYPE
S10-Series
PART NO.
37818
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
S15-Series
PART NO.
37819
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Reel kit with nozzle
PART NO.
387-15
DATA
Description: Includes: Hose reel S10 10m (37818), control valve (3369175).
Hose length: 10 m

CC15-Series



T20-Series



TYPE
CC15-Series
PART NO.
1 37886
2 37887
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Connection: 1/2" - 1/2" (M)-(M) BSP
1 Hose length: 10 m
2 Hose length: 15 m

TYPE
T20-Series
PART NO.
37847
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 3/4" - 3/4" (M)-(M) BSP

TYPE
Digital meter for light vehicles
PART NO.
30210
DATA
Capacity: 30 l/min free flow
Maximum working pressure: 3,0 (30) MPa (bar)
Connection: 1/2" (F) BSP

TYPE
Automatic nozzle for light vehicles
PART NO.
3369179
DATA
Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing.
Capacity: 10 l/min free flow
Outlet: ISO 22241-5
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (M) BSP



TYPE	TYPE	TYPE	TYPE
Manual nozzle for heavy vehicles	Automatic nozzle for heavy vehicles	Automatic nozzle for heavy vehicles with magnet device	Digital meter
PART NO.	PART NO.	PART NO.	PART NO.
1 3369175 2 3369174	1 3369176 2 3369180	3369178	1169096
DATA	DATA	DATA	DATA
Capacity: 90 l/min free flow Outlet: Ø19 mm Maximum pressure: 0,5 (5) MPa (bar) 1 Description: Manufactured in polypropylene, the trigger can be locked in open position. Connection: 1" (F) BSP 2 Description: Manufactured in polypropylene, the trigger can be locked in open position. Connection: 19 (3/4") Ø mm (inch)	1 Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. Capacity: 45 l/min free flow Outlet: Ø19 mm Maximum pressure: 0,5 (5) MPa (bar) Connection: Ø20 mm 2 Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. Capacity: 10 l/min free flow Outlet: Ø19, L=157 mm Maximum pressure: 0,3 (3) MPa (bar) Connection: 19 (3/4") mm (inch)	Description: AdBlue® nozzle with automatic shut-off when the tank is full. Comfortable rubber encased aluminium housing for comfortable grip at low temperature. The lever protection prevents accidental dispensing. With magnetic mis-filling device. The valve will not open unless a magnetic ring is installed in the container. One spare magnetic ring is included. Capacity: 12 - 45 l/min free flow Outlet: Ø19 mm Maximum pressure: 0,5 (5) MPa (bar) Connection: 19 (3/4") Ø mm (inch)	Capacity: 5-120 l/min free flow Maximum pressure: 1 (10) MPa (bar) Maximum temperature: -10 - +60 °C Accuracy: 1,0 % ± Connection: 1" (F)-(M) BSP



NOTES

TYPE
Accessories
PART NO.
1 3218020 2 3218018
DATA
1 Model: Telescopic suction tube AdBlue® with suction tube adaptor for IBC 2 Model: ED50 Pump Bracket for Drum & IBC

TYPE
Stainless steel swivel
PART NO.
3369190
DATA
Material: Stainless steel Connection: 1/2" - 1" (M)-(M) BSP

TYPE
Stainless steel sleeve
PART NO.
3369191
DATA
Material: Stainless steel Connection: 1" - 1" (F)-(F) BSP

Diesel equipment

Diesel pumps	98
Diesel meters	99
Diesel nozzle	100



TYPE
Diesel pumps only
PART NO.
1 10101
2 10112
DATA
IP: 55
Connection: 1" (F)-(F) BSP
1 Capacity: 40 l/min free flow
Motor: 140 W
Voltage: 12 V DC
2 Capacity: 65 l/min free flow
Motor: 240 W
Voltage: 24 V DC

TYPE
Pump kit 12V - 40l/min
PART NO.
10100
DATA
Description: Includes: 12V Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with crocodile clamps
Capacity: 40 l/min free flow
Motor: 140 W
Voltage: 12 V AC

TYPE
Pump kit 24V - 43l/min
PART NO.
10120
DATA
Description: Includes: 24V Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with crocodile clamps
Capacity: 40 l/min free flow
Motor: 160 W
Voltage: 24 V DC

TYPE
Pump kit 24V - 60l/min
PART NO.
10110
DATA
Description: Includes: 12V Diesel pump, 4m x 3/4" hose, Automatic nozzle, 2m cable with crocodile clamps
Capacity: 60 l/min free flow
Motor: 160 W
Voltage: 12 V DC

DIESEL PUMPS

DIESEL METERS



TYPE	TYPE	TYPE	TYPE
Pump kits 230V - 50 l/min	Pump kits 230V - 70 l/min	Digital diesel meter	Mechanical diesel meter
PART NO.	PART NO.	PART NO.	PART NO.
10115	10140	1168820	1168034
DATA	DATA	DATA	DATA
Description: Includes: 230V 50Hz AC Diesel pump, 4m x 3/4" hose, Manual nozzle, 2m cable with plug Capacity: 50 l/min free flow Voltage: 230 V AC	Description: Includes: 230V 50Hz AC Diesel pump, 4m x 3/4" hose, Automatic nozzle, Mechanical meter with 3 digits, Wall bracket Connection: 1" (F) Capacity: 70 l/min free flow Voltage: 230 V AC Connection: 1" (F) BSP	Capacity: 80 l/min free flow Maximum pressure: 7 (70) MPa (bar) Maximum temperature: -5 - +50 °C Accuracy: 0,5 % ± Connection: 3/4" (F)-(F) BSP	Capacity: 10-100 l/min free flow Maximum pressure: 1 (10) MPa (bar) Connection: 1" (F) BSP



TYPE
Turbine meter
PART NO.
1169096
DATA
Capacity: 5-120 l/min free flow
Maximum pressure: 1 (10) MPa (bar)
Maximum temperature: -10 - +60 °C
Accuracy: 1,0 % ±
Connection: 1" (F)-(M) BSP

TYPE
Automatic nozzle
PART NO.
16720
DATA
Capacity: 60 l/min free flow
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (F) BSP

TYPE
Automatic nozzle
PART NO.
16722
DATA
Capacity: 90 l/min free flow
Maximum pressure: 0,35 (3,5) MPa (bar)
Connection: 1" (F) BSP

TYPE
Diesel nozzle
PART NO.
1268983
DATA
Capacity: 120 l/min free flow
Maximum pressure: 1 (10) MPa (bar)
Connection: 1" (F) BSP



NOTES

TYPE

Swivel

PART NO.

1 16725

2 16711

DATA

1 Thread:
1" - 1" (F)-(M) BSP

2 Thread:
3/4"-1" (F)-(M) BSP

NOTES

Air equipment

Air treatment	104
Accessories for air	105



TYPE
Filter regulator
PART NO.
1 18715
2 18716
3 18725
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 3/4" (F)-(F) BSP

TYPE
Regulator
PART NO.
1 18721
2 18722
3 18723
4 1888538
5 1888790
6 1888795
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Model: Regulator 1/4"
Connection: 1/4" (F)-(F) BSP
2 Model: Regulator 3/8"-1/2"
Connection: 3/8" / 1/2" (F)-(F) BSP
3 Model: Regulator 3/4"
Connection: 3/4" (F)-(F) BSP
4 Model: Wall bracket for 1/4" FRL
Connection: 1/4" FRL
5 Model: Wall bracket for 3/8-1/2" FRL
Connection: 3/8"-1/2" FRL
6 Model: Wall bracket for 3/4" FRL
Connection: 3/4" FRL

TYPE
Lubricators and filters
PART NO.
1 18717
2 18718
3 18724
DATA
Maximum pressure: 1,4 (14) MPa (bar)
1 Connection: 1/4" (F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 3/4" (F)-(F) BSP

TYPE
Filter regulator and lubricator
PART NO.
1 18720
2 18719
3 18726
DATA
Maximum pressure: 1,2 (12) MPa (bar)
1 Connection: 1/4" (F)-(F) BSP
2 Connection: 3/8" / 1/2" (F)-(F) BSP
3 Connection: 1/4" (F)-(F) BSP



TYPE
Quick couplers for air
PART NO.
1 1888122 2 1888521 3 1887494 4 1887551 5 1887464 6 1887465 7 1887493
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Connection: 1/2" (F) BSP
2 Connection: 1/2" (M) BSPT
3 Connection: 3/8" (F) BSP
4 Connection: 3/8" (M) BSPT
5 Connection: 1/4" (F) BSP
6 Connection: 1/4" (M) BSPT
7 Connection: 3/8" (M) BSPT

TYPE
Tyre inflators
PART NO.
1 18740 2 18750
DATA
Maximum pressure: 1 (10) MPa (bar)
Connection: 1/4" (F) BSP
1 Description: One hand operation tyre inflator gauge. Calibrated pressure gauge with rubber shroud for protection. 65 cm hose with automatically adjusting nozzle.
2 Description: One hand operation tyre inflator.

TYPE
Quick coupling tyre valve
PART NO.
1 1887466 2 1887467 3 1887468 4 10875
DATA
1 Description: Revolutionary quick connector for tyre valves. Easy one-hand use, it is designed with a self-locking mechanism that secures the connection during inflation. Pull the sleeve to disconnect, similar to any standard air coupler. The coupler is tested and remains fully functional for 100 000 cycles and more.
Thread:
2 Description: Revolutionary quick connector for tyre valves.
Thread:
3 Description: Revolutionary quick connector for tyre valves.
Thread:
4 Description: Hose with quick coupling tyre valve nozzle, 1,5m. Suitable for 18740 and other
Thread:

TYPE
Ball valves for air
PART NO.
1887258
DATA
Model: Ball-Bleeder Valve. Made of brass 1/4" (F) BSP
Maximum working pressure: 1,4 (14) MPa (bar)



TYPE

Needle valve

PART NO.

1 1888045

② 1888047

DATA

1 Thread:
1/4" (F) BSP

2 Thread:
1/2" (F)-(M) BSP

NOTES

Hose reels and accessories

Hose reels for standard duty	108
Heavy duty hose reels	112
Accessories for hose reels	117



TYPE
Cable reel 230 / 400V
PART NO.
1 55010
2 55020
3 55030
DATA
IP: 24
1 Capacity: 2000 W
Voltage: 230 V AC
Cable: H05VV-F 3x1,5 mm
Cable length: 15 m
2 Capacity: 3500 W
Voltage: 230 V AC
Cable: H07RN-F 3x2,5 mm
Cable length: 20 m
3 Capacity: 3000 W
Voltage: 400 V AC
Cable: H07RN-F 5x1,5 mm²
Cable length: 20 m

TYPE
Slow motion brake for cable reel
PART NO.
55015
DATA
Description: Mounts on the cable reel and ensures that the cable is reeled in at a controlled speed. For reel 55010.

TYPE
Cable reel ethernet
PART NO.
55050
DATA
Voltage: 48 V DC
Cable: CAT 5E
Cable length: 15 m

TYPE
Air / water
PART NO.
1 37830
2 37831
DATA
1 Description: With black Polyurethane hose.
Dimension: 8 mm
Maximum pressure: 2 (20) MPa (bar)
Hose length: 15 m
2 Description: Extra flexible black hose.
Dimension: 10 mm
Maximum pressure: 2 (20) MPa (bar)
Hose length: 12 m



S10-Series



S10-Series



S10-Series



S10-Series

TYPE
Oil / glycol
PART NO.
17820
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Grease
PART NO.
27837
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
Hose length: 10 m max (without hose)

TYPE
Air / water
PART NO.
37866
DATA
Maximum pressure: 1,5 (15) MPa (bar)
Dimension: 10 (3/8") mm (inch)
Hose length: 10 m
Connection: 3/8" - 3/8" (M)-(M) BSP

TYPE
Various fluids
PART NO.
① 37838
② 37818
DATA
① Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
② Media: AdBlue®
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP



TYPE
Oil / glycol
PART NO.
17837
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
Hose length: 15 m



TYPE
Grease
PART NO.
1 27835
2 27834
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m



TYPE
Air / water
PART NO.
1 37864
2 37865
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Dimension: 10 (3/8") mm (inch)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
2 Dimension: 12,5 (1/2") mm (inch)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP



TYPE
Various fluids
PART NO.
1 37836
2 37828
3 37819
DATA
1 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
3 Media: AdBlue®
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

HOSE REELS FOR STANDARD DUTY

HOSE REELS FOR STANDARD DUTY



TYPE
Oil / glycol
PART NO.
1 17844
2 17840
3 17843
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 10 m
3 Hose length: 15 m

TYPE
Grease
PART NO.
1 27841
2 27840
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

TYPE
Air / water
PART NO.
1 37869
2 37870
DATA
Maximum pressure: 1,5 (15) MPa (bar)
1 Dimension: 10 (3/8") mm (inch)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
2 Dimension: 12,5 (1/2") mm (inch)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
Various fluids
PART NO.
1 37854
2 37850
DATA
1 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 10 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP



CC15-Series



CC15-Series



CC15-Series



CC15-Series

TYPE
Without hose
PART NO.
1 17805
2 37805
DATA
Connection: 1/2" (M) BSP
1 Media: Oil
Maximum pressure: 9 (90) MPa (bar)
Hose length: 15 m max (without hose)
2 Media: Air/Water
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m max (without hose)

TYPE
Oil / glycol
PART NO.
1 17852
2 17853
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 10 (100) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 10 m
2 Hose length: 15 m

TYPE
Grease
PART NO.
1 27852
2 27853
DATA
Maximum pressure: 35 (350) MPa (bar)
1 Dimension: 6,35 (1/4") mm (inch)
Hose length: 10 m
Connection: 1/4" - 1/4" (M)-(M) BSP
2 Dimension: 10 (3/8") mm (inch)
Hose length: 15 m
Connection: 3/8" - 1/4" (F)-(M) BSP

TYPE
Air / water
PART NO.
1 37877
2 37878
3 37879
DATA
1 Dimension: 10 (3/8") mm (inch)
Maximum pressure: 1,5 (15) MPa (bar)
Hose length: 10 m
Connection: 3/8" - 3/8" (M)-(M) BSP
2 Dimension: 10 (3/8") mm (inch)
Maximum pressure: 1,5 (15) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP
3 Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 1,5 (15) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP

HEAVY DUTY HOSE REELS

HEAVY DUTY HOSE REELS

CC15-Series



TYPE
High pressure water
PART NO.
37875
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Maximum temperature: 150 °C
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

CC15-Series



TYPE
Windscreen fluid / degreaser
PART NO.
① 37872
② 37873
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (M)-(M) BSP
① Hose length: 10 m
② Hose length: 15 m

CC15-Series




TYPE
AdBlue®
PART NO.
① 37886
② 37887
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Connection: 1/2" - 1/2" (M)-(M) BSP
① Hose length: 10 m
② Hose length: 15 m


CC15-Series



TYPE
Waste oil
PART NO.
37695
DATA
Dimension: 16 (5/8") mm (inch)
Inlet: 1/2" (F) BSP
Outlet: 1/2" (F)-(M) BSP
Hose length: 6 m

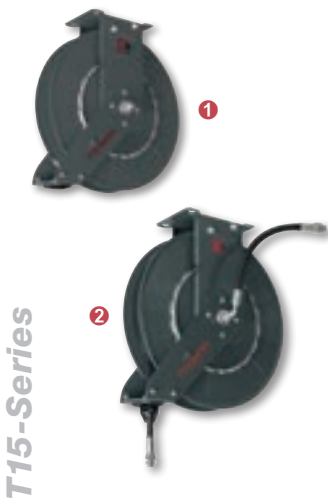

TYPE
Oil / glycol
PART NO.
1 17833
2 17832
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Connection: 1/2" - 1/2" (F)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m

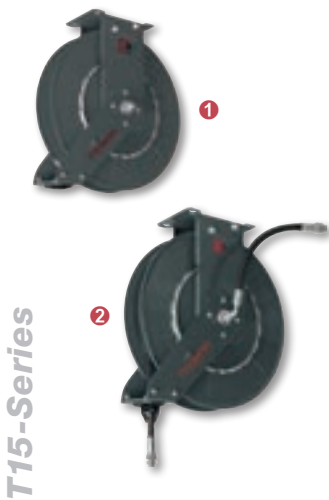

TYPE
Grease
PART NO.
1 27833
2 27832
DATA
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 35 (350) MPa (bar)
Connection: 3/8" - 3/8" (M)-(M) BSP
1 Hose length: 15 m max (without hose)
2 Hose length: 15 m



TYPE
Air / water
PART NO.
37862
DATA
Maximum pressure: 1,5 (15) MPa (bar)
Dimension: 12,5 (1/2") mm (inch)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP



TYPE
Various fluids
PART NO.
1 37848
2 37852
DATA
1 Media: Windscreen fluid/Degreaser
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Media: Hot water
Dimension: 10 (3/8") mm (inch)
Maximum pressure: 17 (170) MPa (bar)
Hose length: 15 m
Connection: 3/8" - 3/8" (M)-(M) BSP

HEAVY DUTY HOSE REELS

HEAVY DUTY HOSE REELS

T20-Series



T20-Series



T20-Series



T20-Series



TYPE
Oil, glycol, air and water
PART NO.
37845
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 20 m max (without hose)
Connection: 1/2" - 1/2" (F)-(M) BSP

TYPE
Oil, glycol, air and water
PART NO.
① 17834
② 17836
DATA
Maximum pressure: 7,5 (75) MPa (bar)
① Dimension: 12,5 (1/2") mm (inch)
Hose length: 20 m
Connection: 1/2" - 1/2" (F)-(M) BSP
② Dimension: 19 (3/4") mm (inch)
Hose length: 15 m
Connection: 3/4" -3/4" (F)-(M) BSP

TYPE
Grease
PART NO.
27850
DATA
Dimension: 12,5 (1/2") mm (inch)
Maximum pressure: 27,5 (275) MPa (bar)
Hose length: 20 m
Connection: 1/2" - 1/2" (M)-(M) BSP

TYPE
AdBlue®
PART NO.
37847
DATA
Dimension: 19 (3/4") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 3/4" - 3/4" (M)-(M) BSP



TYPE
Oil, glycol and air
PART NO.
1 17878
2 17879
DATA
Maximum pressure: 7,5 (75) MPa (bar)
1 Dimension: 19 (3/4") mm (inch)
Hose length: 30 m max (without hose)
Connection: 3/4" - 1" (M)-(M) BSP
2 Dimension: 25,4 (1") mm (inch)
Hose length: 30 m max (without hose)
Connection: 1" - 1" (M)-(M) BSP



TYPE
Oil, glycol and air
PART NO.
1 17880
2 17881
3 17882
DATA
Maximum pressure: 7,5 (75) MPa (bar)
1 Dimension: 12,5 (1/2") mm (inch)
Hose length: 30 m
Connection: 1/2" - 1/2" (M)-(M) BSP
2 Dimension: 19 (3/4") mm (inch)
Hose length: 25 m
Connection: 3/4" - 3/4" (F)-(M) BSP
3 Dimension: 25,4 (1") mm (inch)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP




TYPE
Diesel, air
PART NO.
17882
DATA
Dimension: 25,4 (1") mm (inch)
Maximum pressure: 7,5 (75) MPa (bar)
Hose length: 15 m
Connection: 1" - 1" (F)-(M) BSP



TYPE
Oil, glycol and air
PART NO.
17885
DATA
Dimension: 38,1 (1 1/2") mm (inch)
Maximum pressure: 2,0 (20) MPa (bar)
Hose length: 15 m
Connection: 1 1/2" - 1 1/2" (M)-(M) BSP

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS

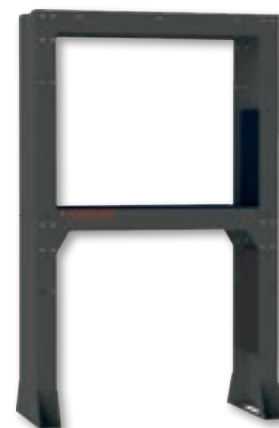

TYPE
Service tower, wide model
PART NO.
1 17875 2 17877
DATA
Dimension: L2,35 x W1,66 x H3,60 m 1 Description: Service tower for truck workshop, can be equipped with a variety of hose reels and provides a single source centre for oil, grease, anti-freeze and exhaust systems. Up to 16 Hose Reels can be fitted and one exhaust hose reel. Concrete fastener must be ordered separately, P/N.: 17776. Size: LxWxH: 2350 x 1660 x 3600 mm 2 Description: Service tower for truck workshop, can be equipped with a variety of hose reels and provides a single source centre for oil, grease, anti-freeze and exhaust systems. Up to 16 Hose reels and 2 exhaust hose reels can be fitted. Concrete fastener must be ordered separately, P/N.: 17776. Size: LxWxH: 2350 x 1660 x 3600 mm

TYPE
Service tower, narrow model
PART NO.
1 17873 3 17860 2 17874 4 17859
DATA
1 Model: Service Tower Narrow Head for 1 Exhaust Reel Dimension: 3620 x 4420 x 1100 mm 2 Model: Service Tower Narrow Head for 2 Exhaust Reel Dimension: 3620 x 5120 x 1100 mm 3 Model: End Plate For Narrow Head Dimension: 3500 x 550 x 101 mm 4 Model: Drip Pan L=2085 mm, for service tower 17873 Dimension: 2085 x 400 x 185 mm

TYPE
Embedded bracket for service tower
PART NO.
17776
DATA
Description: Concrete fastener for casting into floors, provides a supreme mounting platform for the 17875/17877 service stand. The frame design provides clearance for running piping, hoses and ventilation ducts up through the service stand.

TYPE
Service stand
PART NO.
1 17865 2 17869
DATA
1 Description: Service stand for up to 6 Hose Reels. Possibility to fit a 50kg Grease drum with pump under the drip tray. Fits hose reels series: S10, S15, T15 & CC15. Full size: H2600 x W1540 x D760 mm. Nuts for Hose Reels included. 2 Description: Service stand for up to 6 Hose Reels. Possibility to fit a 50kg Grease drum with pump under the drip tray. Fits all our Hose Reels, including C15 and T20. Full size: H2600 x W1970 x D760 mm. Nuts for hose reels included.

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS



TYPE
Height extension kit for service stand
PART NO.
17864
DATA
Description: In workshops with high vehicles it's an advantage that hose reels are higher up. With our height adapter, the total height of Service stands 17865/69 is 3,1m.
Height: 500 mm


TYPE
Additional brackets for service stand
PART NO.
1 17861 2 17863
DATA
1 Description: With this console, two additional hose reels can be mounted on 17865 and 17869. Placed on either side of service stand.
Length: 555 mm
2 Description: With this console, 1 pc Exhaust Reels can be mounted on 17865 and 17869. Placed on either side of service stand.
Length: 1110 mm

TYPE
Service stand for 3 reels
PART NO.
17866
DATA
Description: Service stand for up to 3 hose reels. Includes drip tray. Fits hose reels series: S10, S15, T15 and CC15. Full size: H2250 x W1200 x D350 mm. Nuts for hose reels included.

TYPE
Service stand for 5 reels
PART NO.
17867
DATA
Description: Service stand for up to 5 hose reels. Includes drip tray. Fits hose reels series: S10, S15, T15 & CC15. Full size: H2250 x W1750 x D350 mm. Nuts for hose reels included.

ACCESSORIES FOR HOSE REELS

ACCESSORIES FOR HOSE REELS




TYPE
Reel post
PART NO.
17862
DATA
Description: Column for mounting 2 Hose reels. Size: H2400 x W400 x D320 mm. Pre-drilled holes for T15, S10, S15, C15 and CC15 reels.

TYPE
Pivoting wall bracket for S10, S15, CC15, C15 & T15-ser.
PART NO.
17751
DATA
Description: The reels can be turned up to 145° by using the pivoted bracket. Fits our Reels: S10, S15, CC15, C15 and T15.

TYPE
IBC bracket for pump and reel
PART NO.
1069237
DATA
Description: Bracket for installation of our air operated pumps and hose reels on an IBC tank. Fits our Reels: S10, S15, CC15, C15 and T15.
Connection: 2" (F) BSP

TYPE
Mounting bracket
PART NO.
① 17757 ② 17758 ③ 17759
DATA
① Model: Mounting plate - 2 hose reels
② Model: Mounting plate - 3 hose reels
③ Model: Mounting plate - 5 hose reels



TYPE

Hose guide

PART NO.

1145998

DATA

Description:
Used when mounting a hose reel
in a cabinet . Max. hose diameter
Ø 42 mm.

Dimension:
110x110 mm

NOTES

Notes section with horizontal lines for writing.

Drum handling



TYPE
Trolley for 208 l drums
PART NO.
1 26720
2 2068734
3 2068735
DATA
1 Description: Trolley suitable for 208 l drums, designed for mobile oil dispensing, mobile grease kits, transport of drums etc. Pump and hose reel can be mounted by use of our brackets. With two large roller bearing wheels Ø200mm and one double braked castor wheel.
2 Description: Easy to fit our bracket 16730 and electrical oil pumps.
3 Description: For easy assembly of our hose reels 10-15 series.

TYPE
Heavy duty trolley for 208 l drums
PART NO.
1 26757
2 26747
DATA
1 Description: Our universal trolleys suitable for 20-208 l drums are designed for mobile oil dispensing, mobile grease kits, transport of drums etc. Pump and hose reel can be mounted by use of our brackets. With two large roller bearing wheels Ø260mm and one double braked castor wheel. Accessories: Hose reel bracket 1357213
2 Description: Heavy duty trolley with two Ø 260 mm wheels and one solid rubber swivelling wheel with brake. Includes an adjustable chain for securing the drum and a bracket mounted on the handle for fixing an air operated pump. A hose reel can also be mounted using optional bracket (1357213)

TYPE
Trolley for 50-60 l drums
PART NO.
1003-100
DATA
Description: Sturdy trolley suitable for 50-60L drum designed for mobile oil dispensing, mobile grease kits, transport of drums etc.
Solid construction and very easy to equip to a complete dispenser for any need. Heavy duty trolley for 50-60L drums with two large wheels and two castor wheels.

TYPE
Trolley for 20-60 l drums
PART NO.
1 0985-100
2 26755
DATA
1 Description: Solid construction and very easy to equip to a complete dispenser for any need. With two wheels and drum securing chain.
2 Description: Compact construction and very easy to equip to a complete dispenser for any need. Sturdy locking device for oil and grease drums. Holder for hose included.

DRUM HANDLING

DRUM HANDLING



TYPE
Spill safe drum trolley
PART NO.
1 16860 2 16861 3 16862 4 137-55
DATA
1 Description: Drum trolley (26720) with three wheels, 2 large Ø200 mm and one support wheel Ø100 mm, which is equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 2 Description: Drum trolley (28646) Heavy duty. With 3 wheels, 2 large tyres Ø260 mm and one support wheel Ø150 mm, equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 3 Description: Drum trolley (26747) with 3 wheels, 2 large hard wheels Ø260 mm and one support wheel Ø150 mm, equipped with a brake. With spill containment, suitable for all sizes and types of drum, up to 208 l. 4 Description: Drum bund for mounting on existing trolley. If the drum were to start leaking, there will be no spillage on the floor or ground. When there is no area to normally park ordinary drum trolleys at the end of the day, this is the ideal solution. For 26720, 26757 and 26747. Drilling during assembly is required.

TYPE
Drum dolly
PART NO.
26744
DATA
Description: Compact drum dolly for easy transport of drums. 4 pcs wheel of which 2 pcs are locking

TYPE
For drums
PART NO.
1 318-60 2 318-61
DATA
1 Model: Drum bund for 2 drums Volume: 220 l Material: Steel 2 Model: Plastic drum bund for 2 drums Volume: 250 l Material: Polyethylene

TYPE
Hydraulic drum lift
PART NO.
26890
DATA
Description: Designed to handle steel drums on safety pallets and equipped with a pedal operated hydraulic lift. Max lift height 600mm. Dimensions: width 1045 mm, min height 1340 mm, max height 1840 mm, Lifting weight max 250kg



NOTES

TYPE	TYPE
Drum taps	Level gauge
PART NO.	PART NO.
16704	26780
DATA	DATA
Model: Drum tap 2"	Model: Level gauge for 208 l drums
Connection: 2" (M) BSP	Connection: 3/4" (M) BSP

117-01	19	257-32FP	55	317-66	73	1822-A1	68
117-02	18	257-33	56	318-30	76	1823-1	68
117-08	18	257-33FP	56	318-45	74	1961-S	67
117-10	83	257-34	57	318-51	75	1966-S	67
117-11	83	257-34FP	57	318-60	123	2105	66
117-12	84	257-35	56	318-61	123	2106	66
117-14	84	257-35FP	56	318-62	74	2107	66
117-15	84	257-36	57	318-63	75	2108	66
117-21	84	257-36FP	57	318-64	74	2109	66
117-90	9	257-37	57	318-65	74	2110	66
117-90	19	257-37FP	57	318-66	74	2112	66
137-01	21	257-39	56	318-67	74	2114	66
137-02	21	257-39FP	56	318-68	75	10100	98
137-03	22	257-40	56	318-80	75	10101	98
137-04	22	257-40FP	56	318-81	76	10110	98
137-05	22	257-51	54	318-82	76	10112	98
137-09	26	257-52	55	318-85	75	10115	99
137-10	26	257-55	54	318-86	76	10120	98
137-11	20	257-56	54	318-87	76	10140	99
137-12	20	316-12	33	327-04	59	10215	87
137-12EF	20	316-13	33	327-12	59	10255	87
137-13	26	316-14	33	386-03	86	10277	87
137-14	26	316-15	33	386-04	87	10305	39
137-15	27	316-19	33	386-05	86	10336	39
137-16	27	316-20	33	386-06	87	10336EF	38
137-17	26	317-01	32	387-03	85	10371	37
137-18	26	317-03	32	387-04	86	10372	37
137-19	21	317-04	32	387-05	85	10376	39
137-21	58	317-05	34	387-06	86	10377	39
137-22	58	317-06	34	387-07	85	10391	37
137-23	27	317-07	34	387-08	86	10396	39
137-24	27	317-08	34	387-15	93	10422	37
137-25	27	317-09	35	387-40	92	10452	37
137-26	27	317-10	35	387-41	92	10471	37
137-27	21	317-11	31	387-42	92	10472	37
137-35	42	317-12	31	387-53	92	10491	37
137-36	41	317-13	31	387-54	92	10522	9
137-37	41	317-14	31	501-A	67	10552	9
137-38	42	317-14EF	31	512-RF	67	10571	9
137-46	18	317-15	31	0925-026	46	10572	9
137-46	27	317-15EF	31	0925-400	46	10591	9
137-50	89	317-19	31	0949-160	73	10710	42
137-55	123	317-20	31	0951-200	78	10720	40
137-57	19	317-21	35	0951-500	78	10721	89
137-60	22	317-22	35	0951-500W	89	10730	41
137-61	22	317-23	35	0951-700	78	10875	105
137-62	23	317-25	32	0951-900	79	11645	41
157-03	24	317-26	32	0985-100	122	11646	89
157-04	25	317-27	32	1003-100	122	11647	89
157-25	27	317-28	32	1606-B	66	11716	82
157-26	27	317-44	72	1607-B	66	11717	82
208-A	67	317-44	75	1610-BL	66	11780	76
257-03FP	57	317-44SP	72	1613-B	66	11786	84
257-05	57	317-44SP	75	1627-B	66	11786	92
257-06	57	317-60	72	1627-S	66	11787	84
257-22	58	317-61	73	1629-B	66	11787	92
257-31	55	317-62	73	1634	66	11788	85
257-31FP	55	317-63	73	1688-B	66	11788	93
257-32	55	317-65	72	1820-1	68	12740	82

12741	83	16772	90	17878	36	25787	51
12745	82	16773	47	17878	116	25788	51
12746	83	16773	90	17879	36	25794	50
13770	20	16780	40	17879	116	25795	50
15735	23	16781	46	17880	36	25796	50
15736	24	16782	46	17880	116	26700	55
15740	26	16789	40	17881	36	26705	54
15740	52	16790	77	17881	116	26710	64
15741	26	16791	76	17882	36	26711	64
15741	52	16793	77	17882	116	26712	64
15755	24	16794	77	17882	116	26715	62
15756	24	16797	79	17885	36	26716	62
15765	25	16813	38	17885	116	26716-01	62
15766	25	16818	38	18715	104	26716-11	62
15767	25	16860	123	18716	104	26718	65
15830	23	16861	123	18717	104	26720	122
15831	23	16862	123	18718	104	26721	65
15832	72	17751	119	18719	104	26722	65
16703	39	17757	119	18720	104	26723	65
16704	124	17758	119	18721	104	26725	64
16705	45	17759	119	18722	104	26726	64
16708	39	17776	117	18723	104	26727	64
16709	45	17805	112	18724	104	26728	64
16710-50	44	17820	31	18725	104	26729	64
16711	101	17820	109	18726	104	26730	65
16711-50	44	17832	34	18740	105	26731	64
16716	37	17832	114	18750	105	26732	64
16719	37	17833	34	20701	60	26733	64
16720	100	17833	114	20702	60	26739	65
16721	39	17834	35	20703	60	26741	53
16722	100	17834	115	20706	60	26742	53
16724	39	17836	35	20710	58	26744	123
16725	101	17836	115	20711	58	26746	53
16730	45	17837	31	20712	58	26747	122
16733	45	17837	110	20720	58	26752	63
16735	43	17840	32	20721	58	26755	122
16737	43	17840	111	20730	61	26757	122
16740	43	17843	32	20731	61	26760	63
16741	43	17843	111	20742	60	26762	63
16742	43	17844	32	20745	60	26763	63
16743	43	17844	111	25532	61	26764	63
16744	43	17852	33	25534	61	26765	63
16745	43	17852	112	25710	52	26767	63
16747	43	17853	33	25711	52	26768	63
16749	46	17853	112	25712	52	26769	63
16750	43	17859	117	25720	52	26770	62
16751	43	17860	117	25725	52	26771	62
16753	43	17861	118	25730	51	26772	62
16754	43	17862	119	25731	51	26773	62
16755	39	17863	118	25732	51	26774	62
16761	47	17864	118	25735	50	26775	63
16761	90	17865	117	25736	50	26778	63
16764	42	17866	118	25737	50	26780	124
16765-60	42	17867	118	25745	51	26784	59
16770	47	17869	117	25746	51	26796	65
16770	90	17873	117	25765	50	26890	123
16771	47	17874	117	25766	50	27832	59
16771	90	17875	117	25767	50	27832	114
16772	47	17877	117	25770	62	27833	59

27833	114	37872	86	53871	11	1117707	46
27834	59	37872	113	53872	11	1117718	46
27834	110	37873	86	53874	11	1118436	46
27835	59	37873	113	53875	11	1137123	46
27835	110	37875	113	53876	11	1145998	120
27837	59	37877	112	53877	11	1155153	47
27837	109	37878	112	53878	11	1157234	47
27840	59	37879	112	53881	8	1167431	40
27840	111	37886	94	53882	13	1167744	40
27841	59	37886	113	53883	14	1167783	40
27841	111	37887	94	53886	13	1168034	99
27850	60	37887	113	53890	13	1168574	12
27850	115	43706	67	53890-25	13	1168578	12
27852	60	43718	67	53890-50	13	1168591	40
27852	112	43762	67	53890-125	13	1168595	40
27853	60	43770	65	53890-250	13	1168683	40
27853	112	43771	65	53891	13	1168684	40
30210	87	53132	15	53892	13	1168686	40
30210	94	53154	15	53893	13	1168813	11
30730	89	53171	14	55010	108	1168814	11
30735	89	53183	14	55015	108	1168815	11
30740	89	53191	14	55020	108	1168816	11
30741	89	53192	14	55030	108	1168817	38
30750	90	53193	14	55050	108	1168818	87
30752	90	53197	13	60100	28	1168819	87
36722	88	53287	14	60110	28	1168820	38
36724	88	53393-50	14	60212	92	1168820	99
36731	88	53393-100	14	60224	92	1168964	12
36732	88	53417	15	60230	92	1168980	12
37695	113	53417-1	15	60300	28	1168985	12
37805	112	53437	15	60310	28	1169096	95
37818	93	53792	10	61012	28	1169096	100
37818	109	53801	6	61013	30	1169340	40
37819	93	53802	6	61024	28	1169350	40
37819	110	53803	9	61025	30	1169360	40
37828	110	53804	9	61611	28	1268983	100
37830	108	53820	6	61614	28	1317180	44
37831	108	53821	6	62000	30	1317181	44
37836	85	53822	6	62001	30	1357676	45
37836	110	53823	6	62010	29	1367258	44
37838	85	53824	7	62011	29	1367259	44
37838	109	53826	8	62020	29	1367262	44
37845	35	53827	8	62021	29	1367264	44
37845	115	53828	8	62100	30	1367265	44
37847	94	53829	8	131000	68	1367266	44
37847	115	53830	7	300805	68	1367267	44
37848	85	53831	7	304810	68	1367268	44
37848	114	53835	8	317400	68	1367269	44
37850	111	53836	7	323060	68	1367270	44
37852	114	53850	10	339841	69	1367271	44
37854	85	53860	10	1069237	45	1367347	44
37854	111	53861	10	1069237	119	1367422	44
37862	114	53862	10	1117065	47	1367587	45
37864	110	53863	10	1117178	46	1367594	45
37865	110	53864	10	1117277	47	1367769	77
37866	109	53865	10	1117610	47	1367770	77
37869	85	53866	10	1117701	46	1367771	78
37869	111	53868	11	1117704	46	1367772	78
37870	111	53870	11	1117705	46	1568507	47

1887257	44	A-212	68
1887258	105	A-1184	68
1887260	44	B11740	18
1887464	105	B11741	18
1887465	105	B11741-10	83
1887466	105	B13760	19
1887467	105	B13761	20
1887468	105	B13762	19
1887493	105	C11745	72
1887494	105		
1887551	105		
1888045	106		
1888047	106		
1888122	105		
1888521	105		
1888538	104		
1888790	104		
1888795	104		
2060201	64		
2068734	122		
2068735	122		
2150210	50		
2168600	62		
2168920	63		
2169182	65		
2169183	65		
2169184	65		
2169185	65		
2357404	53		
2357405	53		
2553201	61		
2553401	61		
2553402	61		
3188579	79		
3188587	77		
3188588	77		
3188595	77		
3188596	77		
3188771	79		
3188772	79		
3218018	96		
3218020	96		
3315098	73		
3318791	12		
3318795	12		
3368514	12		
3368519	47		
3368520	47		
3369174	95		
3369175	95		
3369176	95		
3369178	95		
3369179	94		
3369180	95		
3369190	96		
3369191	96		
3672261	88		
3672264	88		
A-210	68		

24-HOUR ONLINE SUPPORT & ORDERING



[ABOUT US](#) [OUR SOLUTIONS](#) [PUMP SELECTION GUIDE](#) [DISTRIBUTORS](#) [CONTACT US](#)

Products

- ▶ NEX-U-®
- ▶ LUBE-Master
- ▶ Oil equipment
- ▶ Grease equipment
- ▶ Diaphragm pumps
- ▶ Waste oil equipment
- ▶ Multi-Fluid equipment
- ▶ Equipment for AdBlue®
- ▶ Equipment for diesel
- ▶ Compressed air
- ▶ Hose & cable reels
- ▶ Drum handling



One of the cornerstones of Eurolube service is instant support in whatever you may require.

TECHNICAL DOCUMENTS

On our website you will be able to easily explore our full product range with detailed photographs, descriptions in English, Swedish and German, individual product data, downloads of manuals and leaflets, and the ability to request quotations on particular products.

PUMP SELECTION GUIDE

We have also developed a tool to aid you in selecting the correct pump for the task. Using our pump selection guide you simply select the fluid to be pumped, and it will tell you which materials are compatible.

ONLINE ORDERING

For our registered distributors, we offer the functionality to log in and place orders directly on our website. When you are logged in as a distributor, you can access e.g.

- Prices and discounts
- Order history
- Downloads for LUBE-Master and related systems
- See precise stock levels



www.eurolube.com

EUROLUBE ACADEMY

Eurolube is proud to announce the launch of the new Eurolube Academy, a complete product training environment complete with a fully equipped NEX-U-® fluid management system. It's designed to train our distributors and end users in the professional handling and use of Eurolube equipment and installation technology. The training focuses on the environment, safety, economy and practical handling of fluid systems.

Contact us if you are interested in learning more.





EUROLUBE EQUIPMENT

BY ALENTEC & ORION AB

GRUSTAGSVÄGEN 4, 138 40 ÄLTA, SWEDEN

EMAIL eurolube@alentec.se

PHONE **+46 8-747 67 10**



www.eurolube.com

DISTRIBUTED BY: