


Led-Lighting 24V with On/Off Switch for Fan



Installation guide

General

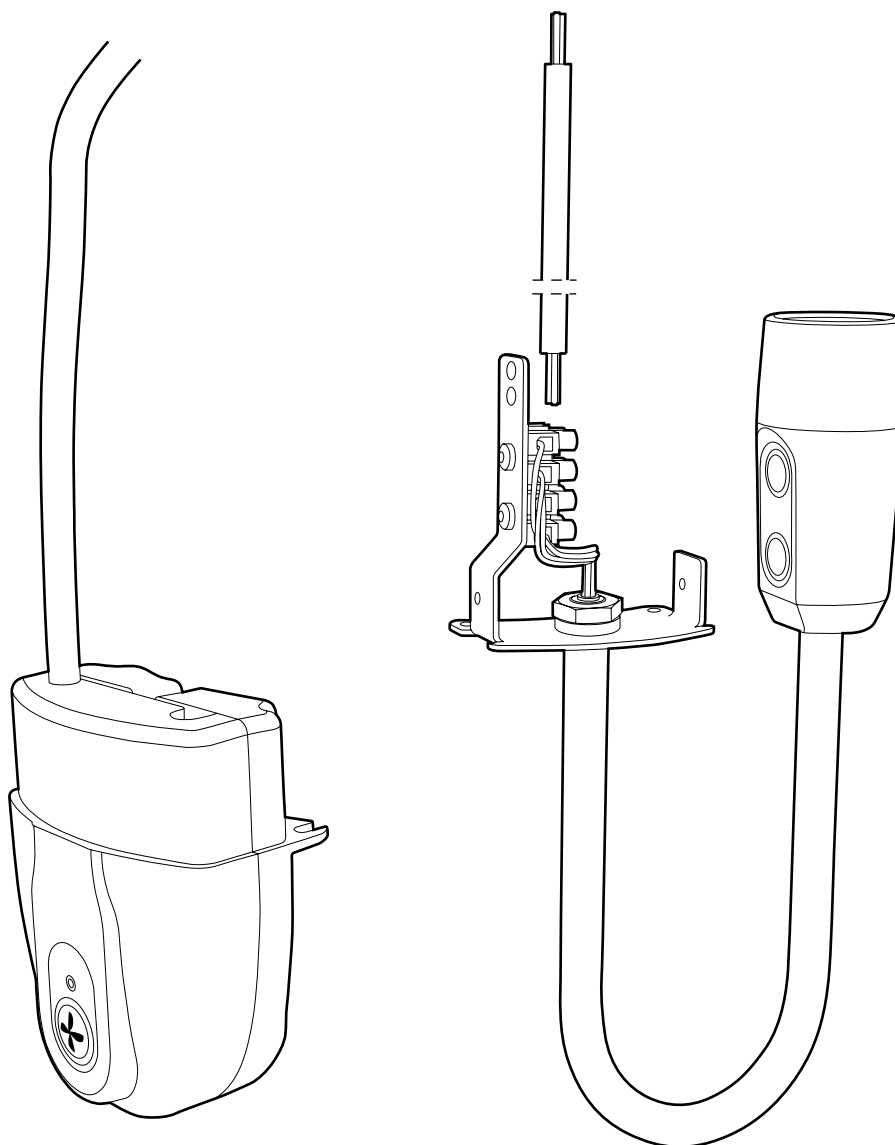

Electrical components may only be installed by a qualified electrician.






Push Button Kit **PR S** and **PR LS** is developed for easy starting / stopping of example lamp, fan and damper. Power supply via separate transformer or control unit.




Installation



These instructions assume that the hose is dismantled from the extraction arm.


PR LS

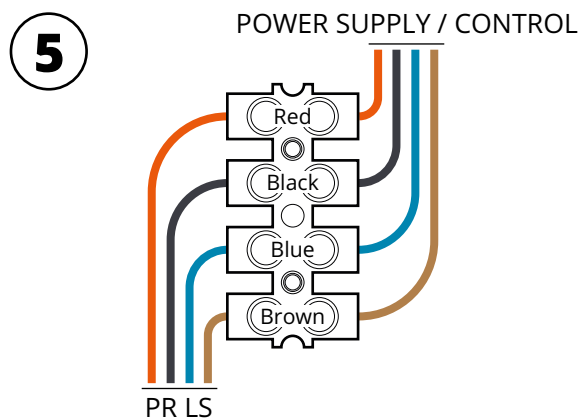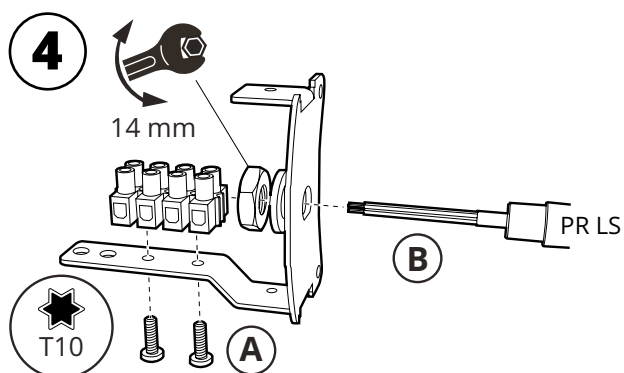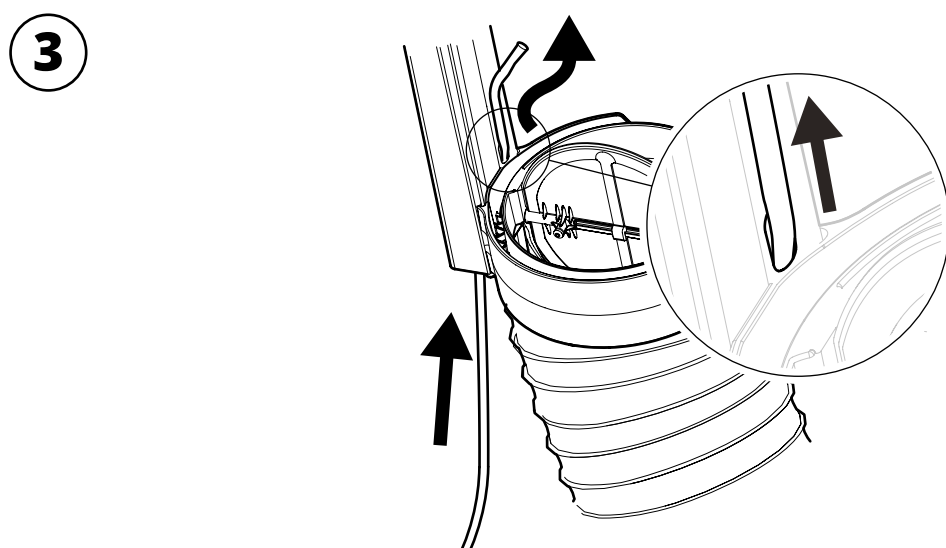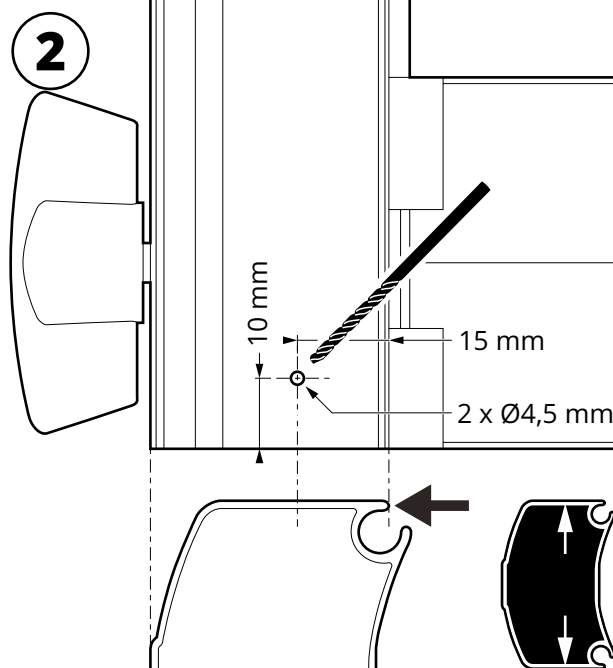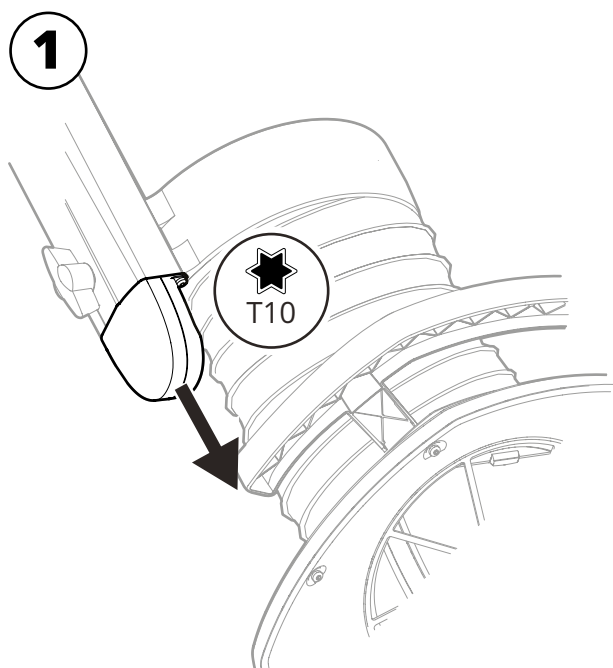

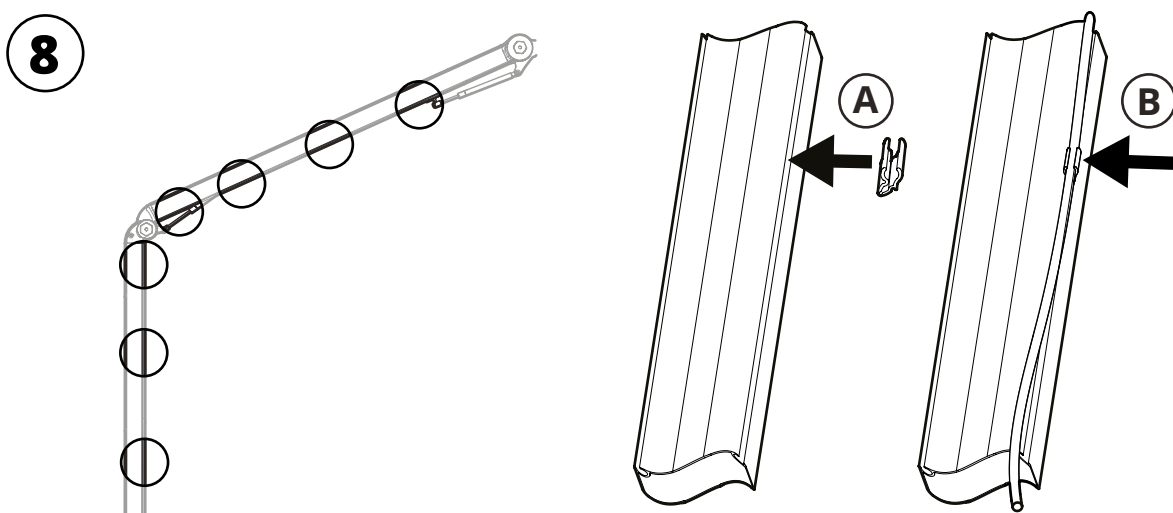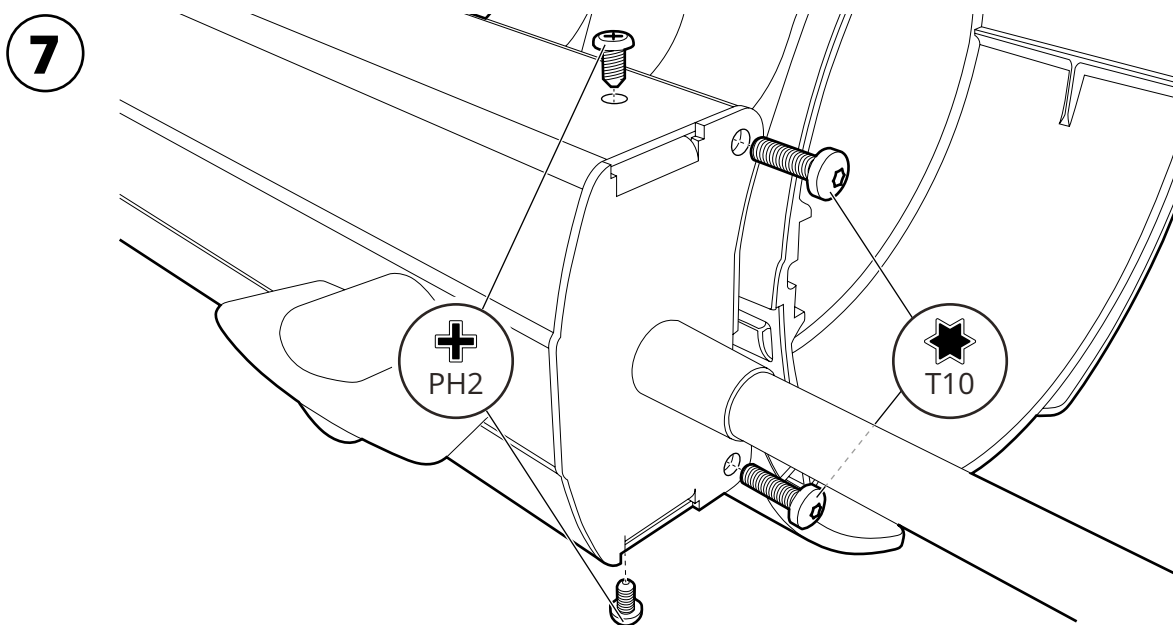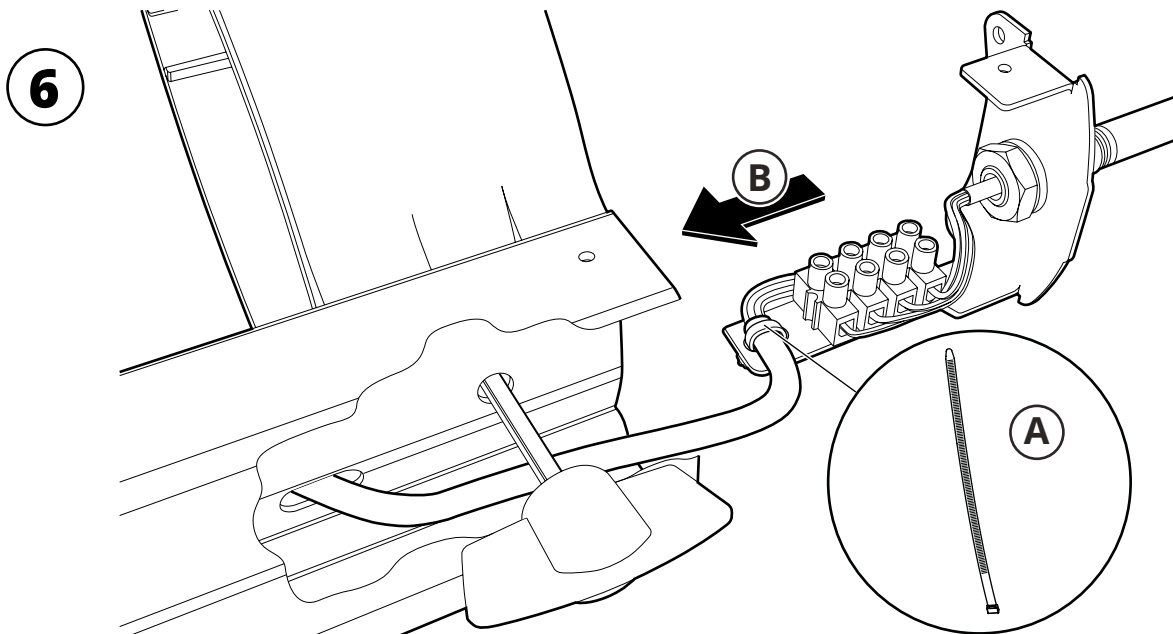

Wiring diagram

S 200/24V

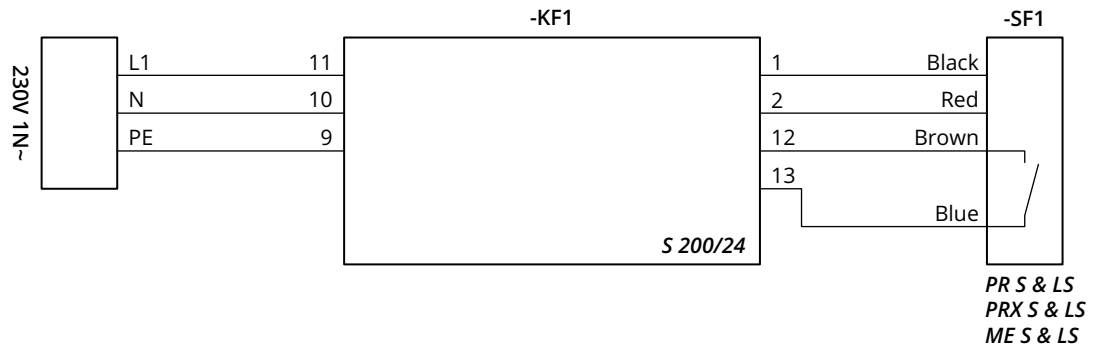

S 400



Technical data

PR LS

Installation

Voltage: 24 V AC/DC
Power: 5 W
Luminous flux: 500 lm¹
Light exchange: 110 lm/W
Colour temperature: 4000 K
Ambient temp.: 0 to 50 °C
Enclosure class: IP 20
Weight: 270 gr

¹ Dimmable 100 - >10 %

Meets requirements

EMC: EN IEC 55015:2019
Luminaires - Safety: EN IEC 60598-2-1:2021
Controlgear - Safety: IEC 61347-2-13:2014
RoHS directive: 2011/65/EU

Product

Materials

Housing: Aluminium
Gooseneck: Stainless steel
Bracket: Steel

Dimensions

Housing: Ø38 x 90 mm
Gooseneck: Ø12 x 380 mm

Maintenance

Maintenance free



EUROLUBE EQUIPMENT

Alentec & Orion AB, Grustagsvägen 4, SE-138 40 Älta, Sweden

EMAIL eurolube@alentec.se PHONE +46 8-747 67 10 FAX +46 8-715 20 74

 www.eurolube.com